

Kollmorgen AKM52E-ANCSEN-02

Servo Motor



Limited Availability
Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/98204-12>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com





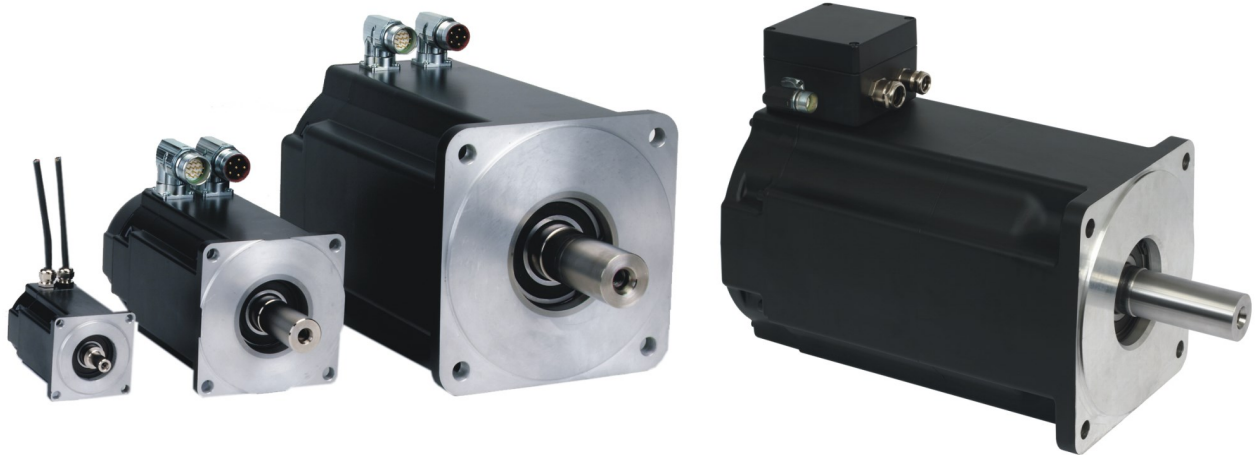
- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

AKM

Part number Scheme and Connectivity

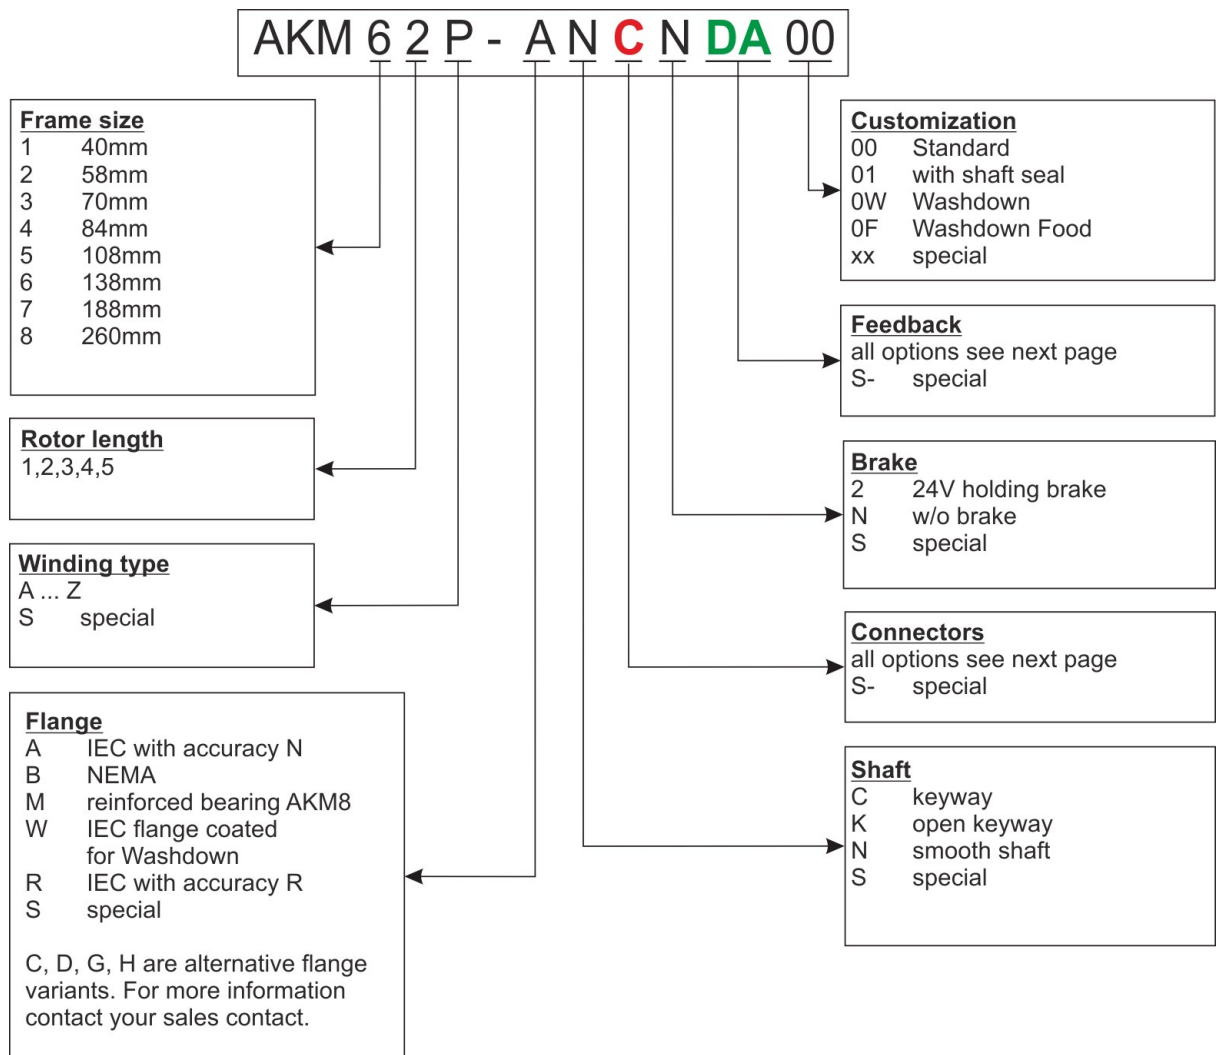


Edition June 2020

KOLLMORGEN

Because Motion Matters™

1 AKM Connector Codes and Pinout



1.1 Connector Options (C)

Technical description of used connectors see KDN ([Mating Connectors](#)).

Connector Description

Connector	Usage*	Contacts - Pins Power/Signal	max. Current [A] Power/Signal	max. Cross Section [mm ²] Power/Signal	Protection Class	Suggested mating connector
M23 SpeedTec Ready (Size 1)	Power & Brake	4 / 4	23.5 / 10	4 / 1.5	IP65	BSTA-108-NN-00-08-0036
	Feedback	- / 12	- / 10	- / 0.5	IP65	ASTA-021-NN-00-10-0035
	Feedback	- / 17	- / 9	- / 0.5	IP65	ASTA-035-NN-00-10-0035
	Hybrid*	4 / 4	23.5 / 10	4 / 1.5	IP65	BSTA-108-NN-00-08-0036
M40 (Size 1.5)	Power & Brake	4 / 2	75 / 30	16 / 4	IP65	CSTA-263-NN-00-26-0001
M12	DRIVE-CLiQ	- / 8	- / 2	- / 0.5	IP65	Standard Siemens Drive-Clq cable
M23-6	DRIVE-CLiQ	6 / -	23.5 / -	4 / -	IP65	
i-tec	Hybrid*	4 / 5	14 / 3.6	1.5 / 0.75	IP65	ESTB-202-NN-00-1110-0500
y-tec	Power & Brake	4 / 5	14 / 3.6	1.5 / 0.75	IP65	ESTB-202-NN-00-31-0500
	Feedback	- / 12	- / 5	- / 0.75	IP65	ESTB-002-NN-00-31-0001
	Feedback	- / 15	- / 5	- / 0.75	IP65	ESTB-205-NN-00-31-0002
Terminal box	Power & Brake	4 / 2	150 / 15	25 / 2.5	IP65	-

* Hybrid means: Power and Feedback (plus Brake) on the same connector and in one cable

Reference Connector-Motor

PTC*	KTY 84-130*	PT1000*	Connection	Usable with	Position of connection
B	1	3	2 SpeedTec Ready connectors	AKM2	Angular, rotatable, motor mounted
C	7	4	2 SpeedTec Ready connectors	AKM1-AKM2	0.5m cable mounted
C	1	4	2 SpeedTec Ready connectors	AKM3-AKM7 ($\leq 23,5A$)	Angular, rotatable, motor mounted
D**	-	9	1 i-tec Hybrid connector	AKM1	Motor mounted
D**	-	9	1 Hybrid connector SpeedTec Ready	AKM2-AKM6	Angular, rotatable, motor mounted
G	-	V	2 SpeedTec Ready connectors	AKM2-AKM7 ($\leq 23,5A$)	Straight, motor mounted
H	-	W	1 power connector M40, 1 Feedback connector SpeedTec Ready	AKM7xQ & AKM82T	Angular, rotatable, motor mounted
-	R**	-	1 power connector M23-6, 1 Feedback connector M12	AKM4-AKM7 ($\leq 23,5A$)	Motor mounted. M23-6 angular, rotatable. M12 Straight.
T	2	X	1 Terminal box, 1 Feedback connector SpeedTec Ready	AKM8	Motor mounted
-	U**	-	1 power connector M23-6, 1 Feedback connector M12	AKM4-AKM7 ($\leq 23,5A$)	Straight, motor mounted
Y	1	Z	1 y-tec connector	AKM1	Motor mounted

* Temperature sensor PTC or KTY or PT1000

** With connector options D, R, and U the temperature sensor type depends on the feedback, see (→ # 5)

1.2 Feedback Options (DA)

Motor length depends on the built-in feedback device

Technical description of the feedback systems see Kollmorgen Developer Network ([MultiFeedback](#)).

1.2.1 Feedback Description

Code	Description	Type	Remarks	Lines per rev.	# of revs.	usable with drives
1-	Comcoder	EPC 15T	Single turn, optical	1024	1	All
2-	Comcoder	EPC 15T	Single turn, optical	2048	1	All
AA	BiSS B Encoder	AD34/AD58	Single turn, optical	2048	1	All
AB	BiSS B Encoder	AD34/AD58	Multi turn, optical	2048	4096	All
C-	SFD	Size 10/15/21	Single turn, inductive, 4 lines	11bit	1	AKD
CA	SFD3	Size 10/15/21	Single turn, inductive, 2 lines	11bit	1	AKD,S700
DA	EnDAT 2.1 Encoder	ECN1113/1313	Single turn, optical	512/2048*	1	All
DB	EnDAT 2.1 Encoder	EQN1125/1325	Multi turn, optical	512/2048*	4096	All
LA	EnDAT 2.1 Encoder	ECI1118/1319	Single turn, inductive	16/32**	1	All
LB	EnDAT 2.1 Encoder	EQI1130/1331	Multi turn, inductive	16/32**	4096	All
MA	DRIVE-CLiQ Encoder	ECN1324S	Safety Single turn, optical	24bit	1	Siemens
MB	DRIVE-CLiQ Encoder	EQN1336S	Safety Multi turn, optical	24bit	4096	Siemens
GA	HIPERFACE Encoder	SKS36	Single turn, optical	128	1	Sx
GB	HIPERFACE Encoder	SKM36	Multi turn, optical	128	4096	Sx
GC	HIPERFACE Encoder	SEK34	Single turn, capacitive	16	1	Sx
GD	HIPERFACE Encoder	SEL34	Multi turn, capacitive	16	4096	Sx
GE	HIPERFACE DSL Encoder	EKS36	Single turn, optical,	18bit	1	AKD,S700
GF	HIPERFACE DSL Encoder	EKM36	Multi turn, optical,	18bit + 12bit	4096	AKD,S700
GJ	HIPERFACE Encoder	SKS36	Single turn, optical	128	1	AKD
GK	HIPERFACE Encoder	SKM36	Multi turn, optical	128	4096	AKD
GM	Safe HIPERFACE Encoder	SKS36S	Safety, like GJ , SIL2, PLd, Cat.3	128***	1	AKD
GN	Safe HIPERFACE Encoder	SKM36S	Safety, like GK , SIL2, PLd, Cat.3	128***	4096	AKD
GP	HIPERFACE Encoder	SEK34	Single turn, capacitive	16	1	AKD
GR	HIPERFACE Encoder	SEL34	Multi turn, capacitive	16	4096	AKD
R-	Resolver	Size 10/15/21	Single turn, inductive	2 poles	1	All

* x/y data for AKM2-4/AKM5-8

** x/y data for AKM2-3/AKM4-8

*** Certificates for safety feedbacks: see Kollmorgen Developer Network ([Approvals](#)) or Kollmorgen website.

1.2.2 Reference Feedback-Motor

Connector code (PTC/KTY 84-130/PT1000)		B/1/3	C/1/4	C/7/4 (Cable)	D/-/9	G/-/V	H/-/W	-/R/-	T/2/X	-/U/-	Y/1/Z
Code	Feedback	Usable with AKM...									
1-	Comcoder	2	3-7	1-2	-	2-6	7,82T	-	8	-	1
2-	Comcoder	2	3-7	1-2	-	2-6	7,82T	-	8	-	1
AA	BiSS B	2	3-7	2	-	2-6	7,82T	-	8	-	-
AB	BiSS B	2	3-7	2	-	2-6	7,82T	-	8	-	-
C-	SFD***	2	3-7	1-2	1-6 (PTC)*	2-6	7,82T	-	8	-	1
CA	SFD3	-	-	-	1-6 (PT1000)	-	-	-	-	-	-
DA	EnDAT 2.1	2	3-7	2	-	2-6	7,82T	-	8	-	-
DB	EnDAT 2.1	2	3-7	2	-	2-6	7,82T	-	8	-	-
LA	EnDAT 2.1	2	3-7	2	-	2-6	7,82T	-	8	-	-
LB	EnDAT 2.1	2	3-7	2	-	2-6	7,82T	-	8	-	-
MA	DRIVE-CLiQ**	-	-	-	-	-	-	4-7	-	4-7	-
MB	DRIVE-CLiQ**	-	-	-	-	-	-	4-7	-	4-7	-
GA	Hiperface	2	3-7	2	-	2-6	7,82T	-	8	-	-
GB	Hiperface	2	3-7	2	-	2-6	7,82T	-	8	-	-
GC	Hiperface	-	-	1	-	-	-	-	-	-	1
GD	Hiperface	-	-	1	-	-	-	-	-	-	1
GE	Hiperface DSL	-	-	-	2-6 (PT1000)	-	-	-	-	-	-
GF	Hiperface DSL	-	-	-	2-6 (PT1000)	-	-	-	-	-	-
GJ	Hiperface	2	3-7	2	-	2-6	7,82T	-	8	-	-
GK	Hiperface	2	3-7	2	-	2-6	7,82T	-	8	-	-
GM	Safe Hiperface	2	3-7	2	-	2-6	7,82T	-	8	-	-
GN	Safe Hiperface	2	3-7	2	-	2-6	7,82T	-	8	-	-
GP	Hiperface	-	-	1	-	-	-	-	-	-	1
GR	Hiperface	-	-	1	-	-	-	-	-	-	1
R-	Resolver	2	3-7	1-2	-	2-6	7,82T	-	8	-	1

* no brake

** temperature sensor according to current Siemens requirements. For more information contact Kollmorgen.

2 Connector Pinout


All connector views: facing front. Abbreviations used :

U	Motor phase U	BR	Motor holding brake	Up	Sensor Voltage supply
V	Motor phase V	TH	Thermal sensor	0V	Ground for Sensor Voltage supply
W	Motor phase W	Z	Zero pulse		
PE	Protection Earth	n.c.	not connected		

2.1 Connector codes 1, Y: AKM1


2.1.1 Power

Pin	Function	Pin	Function
1	BR +	A	U
2	BR -	B	W
3	n.c.	C	V
4	n.c.	E	n.c.
5	n.c.		PE




2.1.2 Resolver (Feedback code R-)

Pin	Function	Pin	Function
1	n.c.	7	S2, cos+
2	TH +	8	S1, sin+
3	S4, cos-	9	R1, ref+
4	S3, sin-	10	n.c.
5	R2, ref-	11	n.c.
6	TH -	12	n.c.

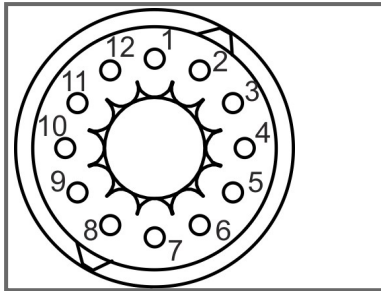


2.1.3 ComCoder (Feedback code 1-, 2-)

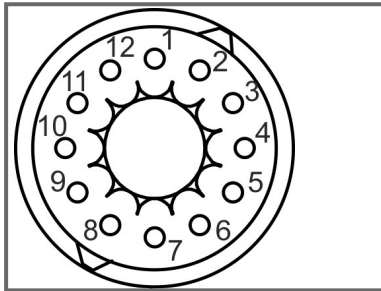
Pin	Function	Pin	Function
1	B +	9	TH -
2	B -	10	Up
3	A +	11	n.c.
4	A -	12	n.c.
5	Z +	A	Hall U
6	Z -	B	Hall V
7	0V	C	Hall W
8	TH +		



2.1.4 SFD (Feedback code C-)

	Pin	Function	Pin	Function
	1	Up	7	n.c.
	2	0V	8	n.c.
	3	Data -	9	n.c.
	4	Data +	10	n.c.
	5	n.c.	11	n.c.
	6	n.c.	12	n.c.

2.1.5 Encoder (Feedback codes GC, GD - S300...S700 drives only)



	Pin	Function	Pin	Function
	1	TH +	7	Data -
	2	TH -	8	Sin +
	3	n.c.	9	Cos +
	4	Sin -	10	Up
	5	Cos -	11	0V
	6	Data +	12	n.c.

2.2 Connector codes 1, 2, 7, B, C, G, H, T: AKM1 - AKM8



Model	Connector code (PTC)	Connector code (KTY 84-130)
AKM1	C	7
AKM2	B, C	1, 7
AKM3 - AKM7	C	1
AKM2 - AKM6	G	-
AKM7, AKM82T	H	1
AKM8	T	2

2.2.1 Power

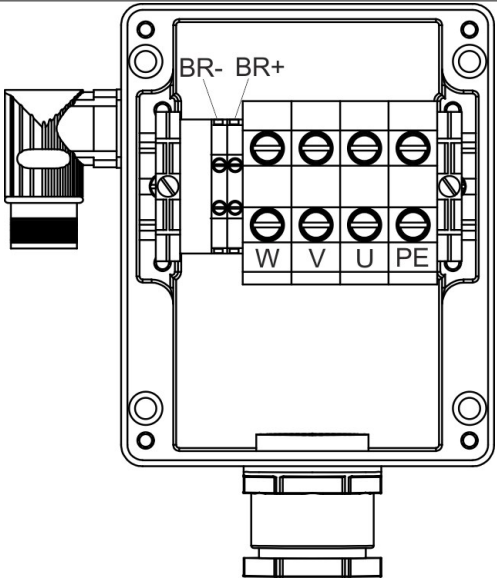
Connector codes 1, 7, B, C, G for AKM1 - AKM7

	Pin	Function		Pin	Function
	1	U		A	BR +
	2	PE		B	BR -
	3	W		C	n.c
	4	V		D	n.c.


Connector code 1, H for AKM7, AKM82T

	Pin	Function		Pin	Function
	U	U		+	BR +
	V	V		-	BR -
	W	W			
	PE	PE			


Connector code 2, T for AKM8

	Terminal	Function	Terminal	Function
	U	Phase U	BR -	Brake -
	V	Phase V	BR +	Brake +
	W	Phase W	PE	Protective Earth

2.2.2 Resolver (Feedback code R-)


	Pin	Function	Pin	Function
	1	n.c.	7	S2, cos+
	2	TH +	8	S1, sin+
	3	S4, cos-	9	R1, ref+
	4	S3, sin-	10	n.c.
	5	R2, ref-	11	n.c.
	6	TH -	12	n.c.

2.2.3 SFD (Feedback code C-)


	Pin	Function	Pin	Function
	1	Up	7	n.c.
	2	0V	8	n.c.
	3	Data -	9	n.c.
	4	Data +	10	n.c.
	5	reserved (shield)	11	n.c.
	6	n.c.	12	n.c.

2.2.4 Encoder (Feedback codes Ax, Dx, Lx, Gx)

Model	Feedback code
AKM1	GC (Sx Drives), GD (Sx Drives)
AKM2 - AKM7	AA, AB, DA, DB, LA, LB, GA (Sxyz Drives), GJ/GM (AKD Drives), GB (Sxyz Drives), GK/GN (AKD Drives)


	Pin	Function	Pin	Function	Pin	Function
	1	B -	7	TH +	13	Data -
	2	0V	8	Clock +	14	TH -
	3	A -	9	B +	15	Clock -
	4	Up	10	Sense -	16	n.c
	5	Data +	11	A +	17	n.c.
	6	n.c.	12	Sense +		

2.2.5 ComCoder (Feedback codes 1-, 2-)


	Pin	Function	Pin	Function	Pin	Function
	1	B +	7	0V	13	n.c.
	2	B -	8	TH +	14	n.c.
	3	A +	9	TH -	15	Hall U
	4	A -	10	Up	16	Hall V
	5	Z +	11	n.c.	17	Hall W
	6	Z -	12	n.c.		

2.3 Connector code D: AKM1 - AKM6


2.3.1 Power & SFD AKM1 (Feedback code C-)

			
Pin	Function	Pin	Function
1	Up	A	U
2	0V	B	W
3	Data -	C	V
4	Data +	E	n.c.
5	n.c.		PE


2.3.2 Power & SFD AKM2 - AKM6 (Feedback code C-)

			
Pin	Function	Pin	Function
1	U	A	Up
	PE	B	0V
3	W	C	Data -
4	V	D	Data +

2.3.3 Power & SFD3 AKM1 (Feedback codes CA)

			
Pin	Function	Pin	Function
1	BR+	A	U
2	BR-	B	W
3	Data -	C	V
4	Data +	E	n.c.
5	n.c.		PE

2.3.4 Power & SFD3/DSL AKM2 - AKM6 (Feedback codes CA, GE, GF)


			
Pin	Function	Pin	Function
1	U	A	BR+
	PE	B	BR-
3	W	C	Data -
4	V	D	Data +

2.4 Connector codes R & U: AKM4 - AKM7

2.4.1 Power

	Pin	Function	Pin	Function
	1	U	4	BR +
	2	V	5	BR -
		PE	6	W

2.4.2 DRIVE-CLiQ (Feedback codes MA, MB)

	Pin	Function	Pin	Function
	1	Up	5	0V
	2	n.c.	6	TXN
	3	RXP	7	TXP
	4	RXN	8	n.c.

About KOLLMORGEN

Kollmorgen is a leading provider of motion systems and components for machine builders. Through world-class knowledge in motion, industry-leading quality and deep expertise in linking and integrating standard and custom products, Kollmorgen delivers breakthrough solutions that are unmatched in performance, reliability and ease-of-use, giving machine builders an irrefutable marketplace advantage.

For assistance with your application needs, visit www.kollmorgen.com or contact us at:

North America

KOLLMORGEN

203A West Rock Road
Radford, VA 24141 USA

Web: www.kollmorgen.com

Mail: support@kollmorgen.com

Tel.: +1 - 540 - 633 - 3545

Fax: +1 - 540 - 639 - 4162

Europe

KOLLMORGEN Europe GmbH

Pempelfurtstraße 1
40880 Ratingen, Germany

Web: www.kollmorgen.com

Mail: technik@kollmorgen.com

Tel.: +49 - 2102 - 9394 - 0

Fax: +49 - 2102 - 9394 - 3155

China & Southeast Asia

KOLLMORGEN Asia

Floor 4, Building 9, No. 518,
North Fuquan Road,
Changning District,
Shanghai 200335, China

Web: www.kollmorgen.cn

Mail: sales.china@kollmorgen.com

Tel.: +86 - 400 - 661 - 2802

Fax: +86 - 21 - 6071 - 0665

KOLLMORGEN®

Because Motion Matters™

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanTG.com | [artisanTG.com](https://www.artisanTG.com)

