ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *OMRON A22-24A* at our website: *Click HERE*

A22

CSM_A22_DS_E_8_2

Install in 22-dia. or 25-dia. Panel Cutout (When Using a Ring)



- Lever for easily mounting and removing the Switch Unit.
- Increase wiring efficiency with three-row mounting of Switch Blocks.
- Finger protection mechanism on Switch Unit provided as a standard feature.
- Use 25-dia. ring to install in 25-dia. panel cutouts.
- Mounted using either open-type (fork-type) or closed-type (round-type) crimp terminals.
- IP65 oil resistance (non-lighted models)
  IP65 (lighted models)




⚠ Refer to *Safety Precautions for All Pushbutton Switches/ Indicators* and *Safety Precautions* on page 23.



List of Models

Non-lighted Pushbutton Switches

	Appearance		Model number
Round	Flat		A22-F
	Projected		A22-T
	Full guard		A22-G
	Half guard		A22-H


	Appearance		Model number
Square	Projected		A22-C
	Guard		A22-D
Mushroom	Mushroom Small (30 dia.)		A22-S
	Mushroom Medium (40 dia.)		A22-M

Lighted Pushbutton Switches

	Appearance		Model number
Round	Projected		A22L-T
	Full guard		A22L-G
	Half guard		A22L-H
Square	Projected		A22L-C
	Guard		A22L-D

Model Number Structure

Model Number Legend ..... Shipped as a set which includes the Pushbutton, Lamp (lighted type only), and Switch.
For information on combinations, refer to *Ordering Information* on pages 3 to 6.



(1) Type

Code	Description
No symbol	Non-lighted
L	Lighted

(2) Flange Shape

Non-lighted

Code	Description	
F	Round	Flat
T		Projected
G		Full-guard
H		Half-guard
C	Square	Projected
D		Full-guard
S	Round	Mushroom Small (30 dia.)
M		Mushroom Medium (40 dia.)

Lighted

Code	Description	
T	Round	Projection
G		Full-guard
H		Half-guard
C	Square	Projection
D		Full-guard

(3) Illumination Color

Code	Description
R	Red
G	Green
Y	Yellow
W	White
A	Blue
B	Black*

* For non-lighted type only

(4) Light Source

Without Voltage Reduction Unit

Code	Operating Voltage	
No symbol	Non-lighted	
6A	LED	6 VAC/VDC
12A		12 VAC/VDC
24A		24 VAC/VDC
5	Incandescent lamp	5 VAC/VDC
12		12 VAC/VDC
24		24 VAC/VDC

With Voltage Reduction Unit

Code	Operating Voltage	
T1	LED	100 VAC
T2		200 VAC

Note: LED incorporates the 24-VAC/VDC type.

(5) Contacts

Code	Description
10	SPST-NO
01	SPST-NC
11	SPST-NO + SPST-NC
20	DPST-NO
02	DPST-NC

Note: 1. The contact ratings are for standard loads. For microloads, select from the accessories on page 10.
2. Refer to page 13 for contact ratings.

(6) Switch Action

Code	Description
M	Momentary
A	Alternate






Note: 1. Momentary operation: Self-resetting
2. Alternate operation: Self-holding
The Socket Unit holds and the Operation Unit resets.

■ Specifications: See pages 13 to 14.
■ Dimensions: Refer to page16.
■ Precautions for correct use: Refer to page 23.
■ Accessories and tools: See pages 10 to 12.

Ordering Information



Completely Assembled..... Shipped as a set which includes the Pushbutton, Lamp (lighted type only), and Switch.

Non-lighted (Round Type)

Appearance	Output	Operation: Momentary operation (self-resetting) Set	Operation: Alternate operation (self-holding) Set	Illumination color
Round/Flat type A22-F 	SPST-NO	**A22-F□-10M**	**A22-F□-10A**	R (red) Y (yellow) G (green) W (white) A (blue) B (black)
	SPST-NC	**A22-F□-01M**	**A22-F□-01A**	
	SPST-NO + SPST-NC	**A22-F□-11M**	**A22-F□-11A**	
	DPST-NO	**A22-F□-20M**	**A22-F□-20A**	
	DPST-NC	**A22-F□-02M**	**A22-F□-02A**	
Round/Projection type A22-T 	SPST-NO	**A22-T□-10M**	**A22-T□-10A**	
	SPST-NC	**A22-T□-01M**	**A22-T□-01A**	
	SPST-NO + SPST-NC	**A22-T□-11M**	**A22-T□-11A**	
	SPST-NO + SPST-NO	**A22-T□-20M**	**A22-T□-20A**	
	SPST-NC + SPST-NC	**A22-T□-02M**	**A22-T□-02A**	
Round/Full-guard type A22-G 	SPST-NO	**A22-G□-10M**	**A22-G□-10A**	
	SPST-NC	**A22-G□-01M**	**A22-G□-01A**	
	SPST-NO + SPST-NC	**A22-G□-11M**	**A22-G□-11A**	
	SPST-NO + SPST-NO	**A22-G□-20M**	**A22-G□-20A**	
	SPST-NC + SPST-NC	**A22-G□-02M**	**A22-G□-02A**	
Round/Half-guard type A22-H 	SPST-NO	**A22-H□-10M**	**A22-H□-10A**	
	SPST-NC	**A22-H□-01M**	**A22-H□-01A**	
	SPST-NO + SPST-NC	**A22-H□-11M**	**A22-H□-11A**	
	SPST-NO + SPST-NO	**A22-H□-20M**	**A22-H□-20A**	
	SPST-NC + SPST-NC	**A22-H□-02M**	**A22-H□-02A**	
Round/Small-size Mushroom type (30-dia. head) A22-S 	SPST-NO	**A22-S□-10M**	---	
	SPST-NC	**A22-S□-01M**		
	SPST-NO + SPST-NC	**A22-S□-11M**		
	SPST-NO + SPST-NO	**A22-S□-20M**		
	SPST-NC + SPST-NC	**A22-S□-02M**		
Round/Medium-size Mushroom type (40-dia head) A22-M 	SPST-NO	**A22-M□-10M**		
	SPST-NC	**A22-M□-01M**		
	SPST-NO + SPST-NC	**A22-M□-11M**		
	SPST-NO + SPST-NO	**A22-M□-20M**		
	SPST-NC + SPST-NC	**A22-M□-02M**		

Note: The contact ratings are for standard loads.

Non-lighted (Square Type)

Appearance	Output	Operation: Momentary operation (self-resetting) Set	Operation: Alternate operation (self-holding) Set	Illumination color
Square/Projection type A22-C 	SPST-NO	**A22-C□-10M**	**A22-C□-10A**	R (red) Y (yellow) G (green) W (white) A (blue) B (black)
	SPST-NC	**A22-C□-01M**	**A22-C□-01A**	
	SPST-NO + SPST-NC	**A22-C□-11M**	**A22-C□-11A**	
	SPST-NO + SPST-NO	**A22-C□-20M**	**A22-C□-20A**	
	SPST-NC + SPST-NC	**A22-C□-02M**	**A22-C□-02A**	
Square/Guard type A22-D 	SPST-NO	**A22-D□-10M**	**A22-D□-10A**	
	SPST-NC	**A22-D□-01M**	**A22-D□-01A**	
	SPST-NO + SPST-NC	**A22-D□-11M**	**A22-D□-11A**	
	SPST-NO + SPST-NO	**A22-D□-20M**	**A22-D□-20A**	
	SPST-NC + SPST-NC	**A22-D□-02M**	**A22-D□-02A**	

Note: The contact ratings are for standard loads.



Individual models: Refer to pages 7 to 9.
(The Pushbutton, Lamp, and Switch can be ordered

■ Specifications: See pages 13 to 14. ■ Dimensions: Refer to page 16.
■ Accessories and tools: See pages 10 to 12.



Ordering Information

Completely Assembled ..... Shipped as a set which includes the Pushbutton, Lamp (lighted type only), and Switch.

Lighted (Round Type)

Appearance	Output	Lighting	Operating voltage	Momentary operation (self-resetting) Set	Alternate operation (self-holding) Set	Illumination color
Round/Projection type LED lighting (without Voltage Reduction Unit) A22L-T 	SPST-NO	LED	6 VAC/VDC	**A22L-T□-6A-10M**	**A22L-T□-6A-10A**	R (red) Y (yellow) G (green) W (white) A (blue)
			12 VAC/VDC	**A22L-T□-12A-10M**	**A22L-T□-12A-10A**	
			24 VAC/VDC	**A22L-T□-24A-10M**	**A22L-T□-24A-10A**	
	SPST-NC		6 VAC/VDC	**A22L-T□-6A-01M**	**A22L-T□-6A-01A**	
			12 VAC/VDC	**A22L-T□-12A-01M**	**A22L-T□-12A-01A**	
			24 VAC/VDC	**A22L-T□-24A-01M**	**A22L-T□-24A-01A**	
	SPST-NO + SPST-NC		6 VAC/VDC	**A22L-T□-6A-11M**	**A22L-T□-6A-11A**	
			12 VAC/VDC	**A22L-T□-12A-11M**	**A22L-T□-12A-11A**	
			24 VAC/VDC	**A22L-T□-24A-11M**	**A22L-T□-24A-11A**	
	SPST-NO + SPST-NO		6 VAC/VDC	**A22L-T□-6A-20M**	**A22L-T□-6A-20A**	
			12 VAC/VDC	**A22L-T□-12A-20M**	**A22L-T□-12A-20A**	
			24 VAC/VDC	**A22L-T□-24A-20M**	**A22L-T□-24A-20A**	
	SPST-NC + SPST-NC		6 VAC/VDC	**A22L-T□-6A-02M**	**A22L-T□-6A-02A**	
			12 VAC/VDC	**A22L-T□-12A-02M**	**A22L-T□-12A-02A**	
			24 VAC/VDC	**A22L-T□-24A-02M**	**A22L-T□-24A-02A**	
Round/Projection type LED voltage-reduction lighting (with Voltage Reduction Unit) A22L-T 	SPST-NO		100 VAC	**A22L-T□-T1-10M**	**A22L-T□-T1-10A**	
			200 VAC	**A22L-T□-T2-10M**	**A22L-T□-T2-10A**	
	SPST-NC		100 VAC	**A22L-T□-T1-01M**	**A22L-T□-T1-01A**	
			200 VAC	**A22L-T□-T2-01M**	**A22L-T□-T2-01A**	
	SPST-NO + SPST-NC		100 VAC	**A22L-T□-T1-11M**	**A22L-T□-T1-11A**	
			200 VAC	**A22L-T□-T2-11M**	**A22L-T□-T2-11A**	
	SPST-NO + SPST-NO		100 VAC	**A22L-T□-T1-20M**	**A22L-T□-T1-20A**	
			200 VAC	**A22L-T□-T2-20M**	**A22L-T□-T2-20A**	
	SPST-NC + SPST-NC		100 VAC	**A22L-T□-T1-02M**	**A22L-T□-T1-02A**	
			200 VAC	**A22L-T□-T2-02M**	**A22L-T□-T2-02A**	

Note: The contact ratings are for standard loads.

Appearance	Output	Lighting	Operating voltage	Momentary operation (self-resetting) Set	Alternate operation (self-holding) Set	Illumination color
Round/Half-guard type LED lighting (without Voltage Reduction Unit) A22L-H 	SPST-NO	LED	24 VAC/VDC	**A22L-H□-24A-10M**	**A22L-H□-24A-10A**	R (red) Y (yellow) G (green) W (white) A (blue)
	SPST-NC			**A22L-H□-24A-01M**	**A22L-H□-24A-01A**	
	SPST-NO + SPST-NC			**A22L-H□-24A-11M**	**A22L-H□-24A-11A**	
	SPST-NO + SPST-NO			**A22L-H□-24A-20M**	**A22L-H□-24A-20A**	
	SPST-NC + SPST-NC			**A22L-H□-24A-02M**	**A22L-H□-24A-02A**	
Round/Half-guard type LED voltage-reduction lighting (with Voltage Reduction Unit) A22L-H 	SPST-NO		100 VAC	**A22L-H□-T1-10M**	**A22L-H□-T1-10A**	
			200 VAC	**A22L-H□-T2-10M**	**A22L-H□-T2-10A**	
	SPST-NC		100 VAC	**A22L-H□-T1-01M**	**A22L-H□-T1-01A**	
			200 VAC	**A22L-H□-T2-01M**	**A22L-H□-T2-01A**	
	SPST-NO + SPST-NC		100 VAC	**A22L-H□-T1-11M**	**A22L-H□-T1-11A**	
			200 VAC	**A22L-H□-T2-11M**	**A22L-H□-T2-11A**	
	SPST-NO + SPST-NO		100 VAC	**A22L-H□-T1-20M**	**A22L-H□-T1-20A**	
			200 VAC	**A22L-H□-T2-20M**	**A22L-H□-T2-20A**	
	SPST-NC + SPST-NC		100 VAC	**A22L-H□-T1-02M**	**A22L-H□-T1-02A**	
			200 VAC	**A22L-H□-T2-02M**	**A22L-H□-T2-02A**	

Note: The contact ratings are for standard loads.



Individual models: Refer to pages 7 to 9.
(The Pushbutton, Lamp, and Switch can be ordered separately.)

■ Specifications and dimensions: See pages 13 to 16.
■ Accessories and tools: See pages 10 to 12.

Ordering Information

Completely Assembled..... Shipped as a set which includes the Pushbutton, Lamp (lighted type only), and Switch.

Lighted (Round Type)

Appearance	Output	Lighting	Operating voltage	Operation: Momentary operation (self-resetting) Set	Operation: Alternate operation (self-holding) Set	Illumination color
Round/Full-guard type LED lighting (without Voltage Reduction Unit) A22L-G 	SPST-NO	LED	6 VAC/VDC	**A22L-G□-6A-10M**	**A22L-G□-6A-10A**	R (red) Y (yellow) G (green) W (white) A (blue)
			12 VAC/VDC	**A22L-G□-12A-10M**	**A22L-G□-12A-10A**	
			24 VAC/VDC	**A22L-G□-24A-10M**	**A22L-G□-24A-10A**	
	SPST-NC		6 VAC/VDC	**A22L-G□-6A-01M**	**A22L-G□-6A-01A**	
			12 VAC/VDC	**A22L-G□-12A-01M**	**A22L-G□-12A-01A**	
			24 VAC/VDC	**A22L-G□-24A-01M**	**A22L-G□-24A-01A**	
	SPST-NO + SPST-NC		6 VAC/VDC	**A22L-G□-6A-11M**	**A22L-G□-6A-11A**	
			12 VAC/VDC	**A22L-G□-12A-11M**	**A22L-G□-12A-11A**	
			24 VAC/VDC	**A22L-G□-24A-11M**	**A22L-G□-24A-11A**	
	SPST-NO + SPST-NO		6 VAC/VDC	**A22L-G□-6A-20M**	**A22L-G□-6A-20A**	
			12 VAC/VDC	**A22L-G□-12A-20M**	**A22L-G□-12A-20A**	
			24 VAC/VDC	**A22L-G□-24A-20M**	**A22L-G□-24A-20A**	
	SPST-NC + SPST-NC		6 VAC/VDC	**A22L-G□-6A-02M**	**A22L-G□-6A-02A**	
			12 VAC/VDC	**A22L-G□-12A-02M**	**A22L-G□-12A-02A**	
			24 VAC/VDC	**A22L-G□-24A-02M**	**A22L-G□-24A-02A**	
Round/Full-guard type LED voltage-reduction lighting (with Voltage Reduction Unit) A22L-G 	SPST-NO		100 VAC	**A22L-G□-T1-10M**	**A22L-G□-T1-10A**	
			200 VAC	**A22L-G□-T2-10M**	**A22L-G□-T2-10A**	
	SPST-NC		100 VAC	**A22L-G□-T1-01M**	**A22L-G□-T1-01A**	
			200 VAC	**A22L-G□-T2-01M**	**A22L-G□-T2-01A**	
	SPST-NO + SPST-NC		100 VAC	**A22L-G□-T1-11M**	**A22L-G□-T1-11A**	
			200 VAC	**A22L-G□-T2-11M**	**A22L-G□-T2-11A**	
	SPST-NO + SPST-NO		100 VAC	**A22L-G□-T1-20M**	**A22L-G□-T1-20A**	
			200 VAC	**A22L-G□-T2-20M**	**A22L-G□-T2-20A**	
	SPST-NC + SPST-NC		100 VAC	**A22L-G□-T1-02M**	**A22L-G□-T1-02A**	
			200 VAC	**A22L-G□-T2-02M**	**A22L-G□-T2-02A**	

Note: The contact ratings are for standard loads.



Individual models: Refer to pages 7 to 9.
(The Pushbutton, Lamp, and Switch can be ordered separately.)

■ Specifications and dimensions: Refer to pages 13 to 16.
■ Accessories and tools: See pages 10 to 12.



Ordering Information

Completely Assembled ..... Shipped as a set which includes the Pushbutton, Lamp (lighted type only), and Switch.

Lighted (Square Type)

Appearance	Output	Lighting	Operating voltage	Momentary operation (self-resetting) Set	Alternate operation (self-holding) Set	Illumination color
Square/Projection type LED lighting (without Voltage Reduction Unit) A22L-C 	SPST-NO	LED	24 VAC/VDC	**A22L-C□-24A-10M**	**A22L-C□-24A-10A**	R (red) Y (yellow) G (green) W (white) A (blue)
	SPST-NC			**A22L-C□-24A-01M**	**A22L-C□-24A-01A**	
	SPST-NO + SPST-NC			**A22L-C□-24A-11M**	**A22L-C□-24A-11A**	
	SPST-NO + SPST-NO			**A22L-C□-24A-20M**	**A22L-C□-24A-20A**	
	SPST-NC + SPST-NC			**A22L-C□-24A-02M**	**A22L-C□-24A-02A**	
Square/Projection type LED voltage-reduction lighting (with Voltage Reduction Unit) A22L-C 	SPST-NO		100 VAC	**A22L-C□-T1-10M**	**A22L-C□-T1-10A**	
			200 VAC	**A22L-C□-T2-10M**	**A22L-C□-T2-10A**	
	SPST-NC		100 VAC	**A22L-C□-T1-01M**	**A22L-C□-T1-01A**	
			200 VAC	**A22L-C□-T2-01M**	**A22L-C□-T2-01A**	
	SPST-NO + SPST-NC		100 VAC	**A22L-C□-T1-11M**	**A22L-C□-T1-11A**	
			200 VAC	**A22L-C□-T2-11M**	**A22L-C□-T2-11A**	
	SPST-NO + SPST-NO		100 VAC	**A22L-C□-T1-20M**	**A22L-C□-T1-20A**	
			200 VAC	**A22L-C□-T2-20M**	**A22L-C□-T2-20A**	
	SPST-NC + SPST-NC		100 VAC	**A22L-C□-T1-02M**	**A22L-C□-T1-02A**	
			200 VAC	**A22L-C□-T2-02M**	**A22L-C□-T2-02A**	

Note: The contact ratings are for standard loads.

Appearance	Output	Lighting	Operating voltage	Momentary operation (self-resetting) Set	Alternate operation (self-holding) Set	Illumination color
Square/Full-guard type LED lighting (without Voltage Reduction Unit) A22L-D 	SPST-NO	LED	24 VAC/VDC	**A22L-D□-24A-10M**	**A22L-D□-24A-10A**	R (red) Y (yellow) G (green) W (white) A (blue)
	SPST-NC			**A22L-D□-24A-01M**	**A22L-D□-24A-01A**	
	SPST-NO + SPST-NC			**A22L-D□-24A-11M**	**A22L-D□-24A-11A**	
	SPST-NO + SPST-NO			**A22L-D□-24A-20M**	**A22L-D□-24A-20A**	
	SPST-NC + SPST-NC			**A22L-D□-24A-02M**	**A22L-D□-24A-02A**	
Square/Full-guard type LED voltage-reduction lighting (with Voltage Reduction Unit) A22L-D 	SPST-NO		100 VAC	**A22L-D□-T1-10M**	**A22L-D□-T1-10A**	
			200 VAC	**A22L-D□-T2-10M**	**A22L-D□-T2-10A**	
	SPST-NC		100 VAC	**A22L-D□-T1-01M**	**A22L-D□-T1-01A**	
			200 VAC	**A22L-D□-T2-01M**	**A22L-D□-T2-01A**	
	SPST-NO + SPST-NC		100 VAC	**A22L-D□-T1-11M**	**A22L-D□-T1-11A**	
			200 VAC	**A22L-D□-T2-11M**	**A22L-D□-T2-11A**	
	SPST-NO + SPST-NO		100 VAC	**A22L-D□-T1-20M**	**A22L-D□-T1-20A**	
			200 VAC	**A22L-D□-T2-20M**	**A22L-D□-T2-20A**	
	SPST-NC + SPST-NC		100 VAC	**A22L-D□-T1-02M**	**A22L-D□-T1-02A**	
			200 VAC	**A22L-D□-T2-02M**	**A22L-D□-T2-02A**	

Note: The contact ratings are for standard loads.

Individual models: Refer to pages 7 to 9.
(The Pushbutton, Lamp, and Switch can be ordered separately.)

■ Specifications and dimensions: See pages 13 to 16.
■ Accessories and tools: See pages 10 to 12.

Ordering Information


Subassembled ..... The Pushbutton, Lamp, or Switch can be ordered separately. Use them in combination for models that are not available as assembled Units. These can also be used as inventory for maintenance parts.

Non-lighted Models

Pushbutton



Switch



Lighted Models (without Voltage Reduction Unit)

Pushbutton



Lamp


Incandescent lamp



LED



Switch (without Voltage Reduction Unit)



Lighted Models (with Voltage Reduction Unit)

Pushbutton




Lamp

LED



Switch (with Voltage Reduction Unit)





Ordering set combinations: Refer to pages 3 to 6.





■ Specifications and dimensions: See pages 13 to 16.
■ Accessories and tools: See pages 10 to 12.

Ordering Information


Subassembled..... The Pushbutton, Lamp, or Switch can be ordered separately. Use them in combination for models that are not available as assembled Units. These can also be used as inventory for maintenance parts.

Pushbutton
Non-lighted



Sealing	IP65 oil-resistant models			
	Flat type	Projection type	Full-guard type	Half-guard type
Appearance				
Color	Model	Model	Model	Model
Red	A22-FR	A22-TR	A22-GR	A22-HR
Green	A22-FG	A22-TG	A22-GG	A22-HG
Yellow	A22-FY	A22-TY	A22-GY	A22-HY
White	A22-FW	A22-TW	A22-GW	A22-HW
Blue	A22-FA	A22-TA	A22-GA	A22-HA
Black	A22-FB	A22-TB	A22-GB	A22-HB

Sealing	IP65 oil-resistant models			
	Round/Mushroom type (30-dia. head)	Round/Mushroom type (40-dia. head)	Square/Projection type	Square/Full-guard type
Appearance				
Color	Model	Model	Model	Model
Red	A22-SR	A22-MR	A22-CR	A22-DR
Green	A22-SG	A22-MG	A22-CG	A22-DG
Yellow	A22-SY	A22-MY	A22-CY	A22-DY
White	A22-SW	A22-MW	A22-CW	A22-DW
Blue	A22-SA	A22-MA	A22-CA	A22-DA
Black	A22-SB	A22-MB	A22-CB	A22-DB

Lighted

Sealing	IP65		
	Projection type	Full-guard type	Half-guard type
Appearance			
Color	Model	Model	Model
Red	A22L-TR	A22L-GR	A22L-HR
Green	A22L-TG	A22L-GG	A22L-HG
Yellow	A22L-TY	A22L-GY	A22L-HY
White	A22L-TW	A22L-GW	A22L-HW
Blue	A22L-TA	A22L-GA	A22L-HA

Note: Common to incandescent lamps and LED lamps.

Sealing	IP65	
	Square/Projection type	Square/Full-guard type
Appearance		
Color	Model	Model
Red	A22L-CR	A22L-DR
Green	A22L-CG	A22L-DG
Yellow	A22L-CY	A22L-DY
White	A22L-CW	A22L-DW
Blue	A22L-CA	A22L-DA

Ordering set combinations: Refer to pages 3 to 6.

■ Specifications and dimensions: See pages 13 to 16.
■ Accessories and tools: See pages 10 to 12.

Ordering Information

Subassembled ..... The Pushbutton, Lamp, or Switch can be ordered separately. Use them in combination for models that are not available as assembled Units. These can also be used as inventory for maintenance parts.

Lamp
LED Lamp



Appearance		Operating voltage / LED Color	6 VAC/VDC Model	12 VAC/VDC Model	24 VAC/VDC Model
	AC and DC	Red	A22-6AR	A22-12AR	A22-24AR
		Green	A22-6AG	A22-12AG	A22-24AG
		Yellow *2	A22-6AY	A22-12AY	A22-24AY
		Blue	A22-6AA	A22-12AA	A22-24AA

*1. For voltage-reduction lighting, use the A22-24A□. Only 24-V LED lamps can be used.
*2. Used when the Pushbutton color is yellow or white.



Incandescent Lamp

Appearance  Operating voltage	5 VAC/VDC	12 VAC/VDC	24 VAC/VDC
	A22-5	A22-12	A22-24

Switch (Standard Load)
No Voltage Reduction Unit

Classification		Non-lighted		Lighted	
Appearance					
Operation		Momentary	Alternate	Momentary	Alternate
Contacts		Model	Model	Model	Model
Standard load	SPST-NO	A22-10M	A22-10A	A22L-10M	A22L-10A
	SPST-NC	A22-01M	A22-01A	A22L-01M	A22L-01A
	SPST-NO + SPST-NC	A22-11M	A22-11A	A22L-11M	A22L-11A
	SPST-NO + SPST-NO	A22-20M	A22-20A	A22L-20M	A22L-20A
	SPST-NC + SPST-NC	A22-02M	A22-02A	A22L-02M	A22L-02A

Voltage Reduction Unit

Classification		110 VAC, Lighted		220 VAC, Lighted	
Appearance					
Operation		Momentary	Alternate	Momentary	Alternate
Contacts		Model	Model	Model	Model
Standard load	SPST-NO	A22L-10M-T1	A22L-10A-T1	A22L-10M-T2	A22L-10A-T2
	SPST-NC	A22L-01M-T1	A22L-01A-T1	A22L-01M-T2	A22L-01A-T2
	SPST-NO + SPST-NC	A22L-11M-T1	A22L-11A-T1	A22L-11M-T2	A22L-11A-T2
	SPST-NO + SPST-NO	A22L-20M-T1	A22L-20A-T1	A22L-20M-T2	A22L-20A-T2
	SPST-NC + SPST-NC	A22L-02M-T1	A22L-02A-T1	A22L-02M-T2	A22L-02A-T2

*1. A DPST-NO model is shown here as an example.
*2. For a model with a Voltage Reduction Unit, use the A22-24A□. Only 24-V LED lamps can be used.





Ordering set combinations: Refer to pages 3 to 6.

■ Specifications and dimensions: See pages 13 to 16.
■ Accessories and tools: See pages 10 to 12.

Ordering Information

Accessories (Order Separately)

Accessories




Item		Appearance	Classification			Model	Remarks
Switch Blocks			SPST-NO	Standard load		**A22-10**	Order Switch Blocks to add an SPST-NO (A22-10) or SPST-NC (A22-01) Switch Block (for standard loads) or to replace a Switch Block.
				Microload		**A22-10S**	
			SPST-NC	Standard load		**A22-01**	
				Microload		**A22-01S**	
			DPST-NO	Standard load		**A22-20**	
				Microload		**A22-20S**	
			DPST-NC	Standard load		**A22-02**	
				Microload		**A22-02S**	
			SPST-NO + SPST-NC	Standard load		**A22-11**	
				Microload		**A22-11S**	
Lamp Sockets			Direct lighting			**A22-TN**	
			Voltage-reduction lighting	110 VAC		**A22-T1**	Used when changing the lighting method. (LED only)
				220 VAC		**A22-T2**	
Mounting Latches			For momentary models			**A22-3200**	Provided as standard. Order Mounting Latches only when mounting Switch Blocks or Lamp Sockets that are purchased individually.
			For alternate models			**A22-3210**	
Legend Plate Frames	Standard size		With Snap-in Legend Plate (Without text)		White	**A22Z-3321**	Snap-in Legend Plate is acrylic.
					Red	**A22Z-3322**	
					Black	**A22Z-3323**	
			Without Snap-in Legend Plate			**A22Z-3320**	
	Large size		With Snap-in Legend Plate (Without text)		White	**A22Z-3331**	Snap-in Legend Plate is acrylic.
					Red	**A22Z-3332**	
					Black	**A22Z-3333**	
			Without Snap-in Legend Plate			**A22Z-3330**	
Lock Ring			Round			**A22Z-3360**	This Lock Ring is used when a more secure lock feature is required.
Metallic Bezel Rings			For flat or projection models			**A22Z-3580**	Replace with the standard model. Material: Copper alloy-Nickel chrome plating Cannot be used with the M22.
			For full-guard models			**A22Z-3582**	
Sealing Caps			For flat models			**A22Z-3600F**	Used to prevent dust or water from entering the Operation Unit (Pushbutton, etc.). Color: opaque Material: silicon
			For projection models			**A22Z-3600T**	
			For full-guard models			**A22Z-3600G**	
Color Caps			Red			**A22Z-30TR**	Used for changing the Pushbutton color of the (round) Pushbutton Switches. Cannot be used, however, with Half-guard Switches.
			Green			**A22Z-30TG**	
			Yellow			**A22Z-30TY**	
			White			**A22Z-30TW**	
			Blue			**A22Z-30TA**	
Caps	For A22		For projection, full-guard, or half-guard models			**A22Z-3490**	Material: polycarbonate resin
	For M22		For round models			**A22Z-3495**	
Three-throw Spacer			---			**A22Z-3003**	Used when mounting three Nonlighted Switches. Cannot be used with Alternate action type, knob-type Selector, and Key-type Selector because of the structure. Mushroom-type Switch provides an A22Z-3003, three-throw spacer. (See page 28.)
Hole Plug			Round			**A22Z-3530**	Can be plugged into pre-cut panel holes for future expansion. The color is black. Color: Black
Control Boxes (Enclosures)			One hole			**A22Z-B101**	For those designed A22Z-B1□, DPST-NO or DPST-NC Switches cannot be used. A22Z-B2□ Control Boxes, A22-series alternate operation models, and DPST-NO, DPST-NC, and SPST-NO + SPST-NC contacts cannot be used. Material: Polycarbonate resin
						A22Z-B201	
			One hole, yellow box (for emergency stop)			**A22Z-B101Y**	
						A22Z-B201Y	
			Two holes			**A22Z-B102**	
						A22Z-B202	
			Three holes			**A22Z-B103**	
						A22Z-B203	
Connectors			Applicable cable diameter (mm)	7 to 9 dia.		**A22Z-3500-1**	Plastic connector used to extend a cable from the Switch Box. (See 9 to 11 dia. A22Z-3500-2 page 27.)
				9 to 11 dia.		**A22Z-3500-2**	

Ordering Information



Item	Appearance	Classification	Model	Remarks
25-dia. Ring		---	**A22Z-R25**	Use when mounting to a panel with a 25-dia. hole. For details, refer to page 18. Since this is not attached to the main body, order separately.
30-dia. Resin Attachment		Round	**A22Z-A30**	Use when mounting to a panel with a 30-dia. hole. For details, refer to page 20.
Lock Plate		---	**A22Z-3380**	Use to fix the lever on the Switch.
Simple Protective Cover		---	**A22Z-3700**	Prevents foreign matter entering into the Switch from the back of the panel.

■ Specifications: See pages 13 to 14.
■ Dimensions: See page 16.
■ Precautions for correct use: See page 23.
■ Accessories and tools: See pages 10 to 12.

Ordering Information

Item		Appearance	Classification			Model	Remarks
Snap-in Legend Plates	Standard size		Without text	Black		**A22Z-3443B**	Attached to the Standard-size Legend Plate Frame. (See page 28.) Material: Acrylic
				Red		**A22Z-3443R**	
				White		**A22Z-3443W**	
				Transparent		**A22Z-3443C**	
			With text	White text on red background	❍	**A22Z-3443R-2**	
					STOP	**A22Z-3443R-4**	
					STOP	**A22Z-3443R-J4**	
				Black text on red background	EMERGENCY STOP	**A22Z-3443R-J1**	
				White text on black background	|	**A22Z-3443B-1**	
					START	**A22Z-3443B-3**	
					ON	**A22Z-3443B-5**	
					OFF	**A22Z-3443B-6**	
					UP	**A22Z-3443B-7**	
					DOWN	**A22Z-3443B-8**	
					POWER ON	**A22Z-3443B-9**	
					OFF-ON	**A22Z-3443B-10**	
					AUTO	**A22Z-3443B-J1**	
					MANUAL	**A22Z-3443B-J2**	
					START	**A22Z-3443B-J3**	
					RESET	**A22Z-3443B-J4**	
					ON	**A22Z-3443B-J5**	
					OFF	**A22Z-3443B-J6**	
					POWER ON	**A22Z-3443B-J7**	
					RUN	**A22Z-3443B-J8**	
					UP	**A22Z-3443B-J9**	
					DOWN	**A22Z-3443B-J10**	
					OFF-ON	**A22Z-3443B-J11**	
					MANUAL-AUTO	**A22Z-3443B-J12**	
					REVERSE-FORWARD	**A22Z-3443B-J13**	
					CLOSE-OPEN	**A22Z-3443B-J14**	
					MANUAL OFF AUTO	**A22Z-3443B-J15**	
	Large size		Without text	Black		**A22Z-3453B**	Used as an Emergency Stop Switch Legend Plate. (See page 28.) Material: Acrylic
				Red		**A22Z-3453R**	
				White		**A22Z-3453W**	
				Transparent		**A22Z-3453C**	
	For Emergency Stop Switch		Black text on yellow background	60-dia. round plate with black letters on a yellow background		**A22Z-3466-1**	EMERGENCY STOP is engraved on the plate. Used as an Emergency Stop Switch Legend Plate
				90-dia. round plate with black letters on a yellow background		**A22Z-3476-1**	
Character Films			No print (Round)			**A22Z-3460**	After printing on a film, affix to the indicator plate of the Lighted Pushbutton Switch. (The back is coated with adhesive.)
			Character print (Round)	|		**A22Z-3460-1**	
				❍		**A22Z-3460-2**	
				START		**A22Z-3460-3**	
				STOP		**A22Z-3460-4**	
			No print (Square)			**A22Z-3480**	

Tools

Item	Appearance	Classification	Model	Remarks
Lamp Extractor		---	**A22Z-3901**	Rubber tool used to easily replace Lamps
Tightening Wrench		---	**A22Z-3905**	Used to tighten mounting nuts from the back of the panel and to replace the cap of the Lighted Emergency Switch.
Cap Tightening Tool		---	**A22Z-3908**	Used for replacing the cap of the Half-guard Pushbutton Switch.
Cap Puller		---	**A3PJ-5080**	Used for removing the cap from the Pushbutton of the Square Lighted Pushbutton Switch.

■ Specifications: See pages 13 to 14.
■ Dimensions: See page 16.
■ Precautions for correct use: See page 23.
■ Accessories and tools: See pages 10 to 12.

Specifications

Approved Standard Ratings

UL, cUL (File No. E41515)

6 A at 220 VAC, 10 A at 110 VAC

Note: Only Switch Blocks and Lamp Sockets are recognized by UL.
Refer to Page 10 for the model numbers.

EN60947-5-1 (Low Voltage Directive)

3 A at 220 VAC

CCC (GB14048.5)

3 A at 240 VAC, 1.5 A at 24 VDC

Ratings

Contacts (Standard Load)

Contacts (Standard Load)	Rated voltage	Rated current (A)			
		Inductive load	Resistive load	Inductive load	Resistive load
10A	24 VAC	10	10	---	---
	110 VAC	5	10		
	220 VAC	3	6		
	380 VAC	2	3		
	440 VAC	1	2		
	24 VDC	---	---	1.5	10
	110 VDC			0.5	2
	220 VDC			0.2	0.6
	380 VDC			0.1	0.2

Note: 1. The above ratings were obtained by conducting tests under the following conditions.
(1) Ambient temperature: 20±2°C
(2) Ambient humidity: 65±5% RH
(3) Operating frequency: 20 operations/minute
2. Minimum applicable load: 10 mA at 5 VDC

Contacts (Microload)

Rated applicable load	50 mA at 24 VDC (Resistive load)
Minimum applicable load	1 mA at 5 VDC

LED Indicators

Rated voltage	Rated current	Operating voltage
6 VAC/VDC	8 mA	6 VAC/VDC±5%
12 VAC/VDC		12 VAC/VDC±5%
24 VAC/VDC		24 VAC/VDC±5%

Incandescent Lamp

Rated voltage	Rated current	Operating voltage
6 VAC/VDC	200 mA	5 VAC/VDC
14 VAC/VDC	80 mA	12 VAC/VDC
28 VAC/VDC	40 mA	24 VAC/VDC

Voltage-reduction Lighting

Rated voltage	Rated current	Operating voltage	Applicable lamp (BA9S/Base: 13)
110 VAC	8 mA	100 VAC (95 to 115 V)	LED Lamp (A22-24A□)
220 VAC		200 VAC (190 to 230 V)	

Specifications

Characteristics

Item \ Type		Pushbutton Switches		Knob-type Selector Switches		Key-type Selector Switch	Indicator
		Non-lighted models: A22-F A22-T A22-G A22-H A22-S A22-M A22-C A22-D	Lighted models: A22L-T A22L-G A22L-H A22L-C A22L-D	Non-lighted model: A22S	Lighted model: A22W	Non-lighted model: A22K	M22
Allowable operating frequency	Mechanical	Momentary operation: 60 operations/minute max.		Manual reset: 30 operations/minute max. Automatic reset: 30 operations/minute max.			---
	Electrical	30 operations/minute max.					---
Insulation resistance		100 MΩ min. (at 500 VDC)					
Contact resistance	Standard load	100 mΩ max. (initial value)					
	Microload	100 mΩ max. (initial value)					
Dielectric strength	Between terminals of same polarity	2,500VAC, 50/60Hz for 1min					
	Between each terminal and ground	2,500VAC, 50/60Hz for 1min					
Vibration resistance	Malfunction *1	Malfunction *2: 10 to 55 Hz, 1.5-mm double amplitude					
Shock resistance	Destruction	1,000 m/s^2 max.	1,000 m/s^2 max.	1,000 m/s^2 max.	1,000 m/s^2 max.	1,000 m/s^2 max.	1,000 m/s^2 max.
	Malfunction *1	1,000 m/s^2 max.	600 m/s^2 max.	1,000 m/s^2 max.	600 m/s^2 max.	1000 m/s^2 max.	600 m/s^2 max.
Durability	Mechanical	Momentary operation: 5,000,000 operations min.		500,000 operations min.	100,000 operations min.	500,000 operations min.	---
	Electrical	500,000 operations min.		500,000 operations min.	100,000 operations min.	500,000 operations min.	---
Ambient operating temperature * 2		−20°C to 70°C	−20°C to 55°C	−20°C to 70°C	−20°C to 55°C	−20°C to 70°C	−20°C to 55°C
Ambient operating humidity		35% to 85% RH					
Ambient storage temperature *2		−40°C to 70°C					
Degree of protection *3		IP65 (oil-resistant)	IP65	IP65 (oil-resistant)	IP65	IP65 (oil-resistant)	IP65
Electric shock protection class		Class II					
PTI (tracking characteristic)		175					
Degree of contamination		3 (IEC947-5-1)					

*1. Malfunction within 1 ms.
*2. With no icing or condensation.
*3. Degree of protection from the front of the panel.


Operating Characteristics (for SPST-NO/SPST-NC)

Item \ Type	Pushbutton Switches	Knob-type Selector		Key-type Selector Switch	
	Lighted Nonlighted Pushbutton Switches	Manual reset	Automatic reset	Manual reset	Automatic reset
	A22-F A22-T A22-G A22-H A22-C A22-D A22-S A22-M A22L-T A22L-G A22L-H A22L-C A22L-D	A22S A22W		A22K	
Total travel force (TTF) max.	29.4 N	0.34 N·m*	0.25 N·m for two notches * 0.34 N·m for three notches *	0.34 N·m*	0.25 N·m for two notches * 0.34 N·m for three notches *
Total travel (TT)	5.5 mm max.	Approx. 90° for two notches (Approx. 45° for three notches)		Approx. 90° for two notches (Approx. 45° for three notches)	
Resetting force (RF) min.	---	0.34 N·m max.*	---	0.34 N·m max.*	---

* Rotation torque for Knob-type Selector and Key-type Selector Switches.

Nomenclature

Model Structure

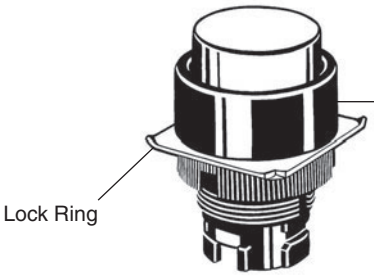


Pushbutton

- Available Colors
  Non-lighted:
  Red, Green, Yellow, White, Blue, Black
  Lighted:
  Red, Green Yellow, White, Blue



Lamp

- Light Source
  LED lamp
  Incandescent lamp



Switch

- Contacts
  SPST-NO, SPST-NC, SPST-NO + SPST-NC,
  SPST-NO + SPST-NO, SPST-NC + SPST-NC
  (Minimum applicable load: 10 mA at 5 VDC)
- Lighting Method
  Non-lighted
  Lighted (without Voltage Reduction Unit)
  Lighted (with Voltage Reduction Unit)

The above illustration shows a lighted model.


Dimensions

(Unit: mm)


Lighted/Non-lighted Pushbutton Switches (The following illustrations are for momentary operation.)

Flat Type/A22-F







For SPST-NO (SPST-NC) Switches

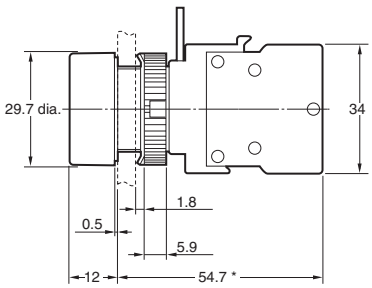


For SPST-NO (SPDT-NC)
Alternate Operation Switches

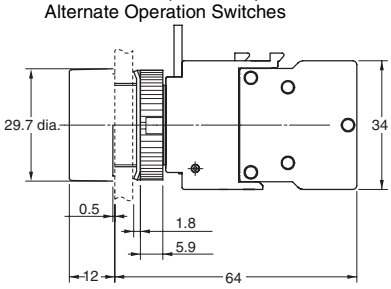


For DPST-NO (DPST-NC)
Monoblock-contact Switches

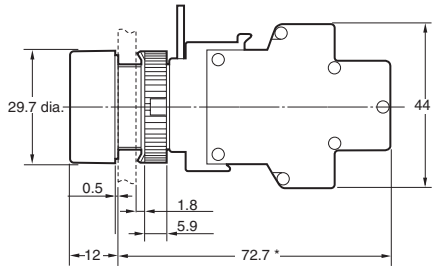


Half-guard Type/A22-H/A22L-H



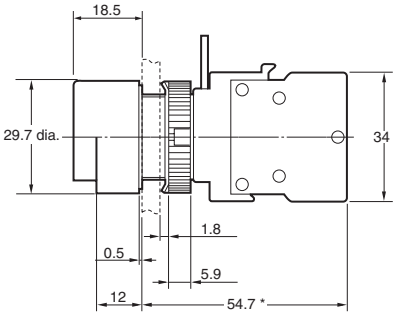



Projection Type/A22-T/A22L-T



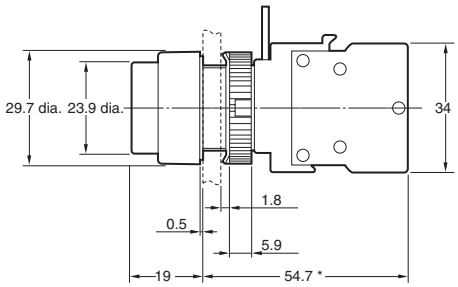



Full-guard Type/A22-G/A22L-G



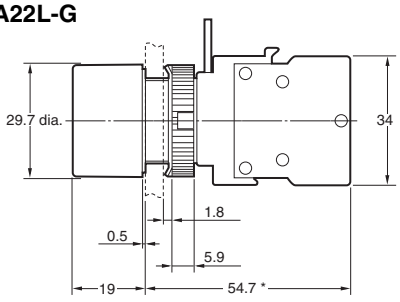



40-dia. Mushroom Type/A22-M



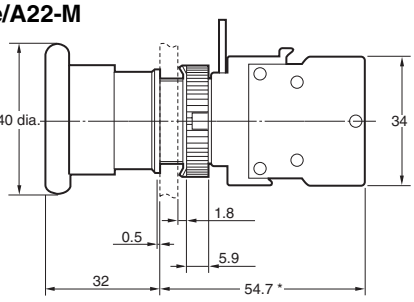



Square/Projection type/A22-C/A22L-C



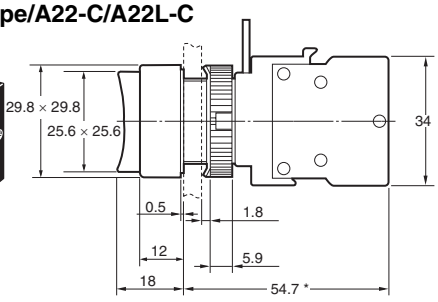

Square/Full-guard Type/A22-D/A22L-D





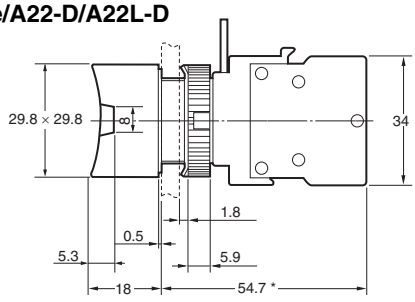


Note: Lighted models have the same dimensions as shown above, whether they are with or without Voltage Reduction Units.
* Alternate operation models are 9.3 mm longer.





Dimensions

(Unit: mm)


Terminal Arrangement (Bottom View)

Non-lighted (SPST-NO + SPST-NC)	Lighted (SPST-NO + SPST-NC)	Non-lighted (DPST-NO + DPST-NC)
		

Terminal Connection

Item	Terminal connection
Non-lighted (SPST-NO + SPST-NC)	
Non-lighted (DPST-NO + DPST-NC)	
Lighted without Voltage Reduction Unit (SPST-NO + SPST-NC)	
Lighted with Voltage Reduction Unit (SPST-NO + SPST-NC)	

Panel Cutouts



Lock ring is provided as a standard item.

- When applying coating such as paint to the panel, the dimensions should be those after the application of coating.
- Recommended panel thickness: 1 to 5 mm.
- Use an A22Z-R25 Ring when mounting to a panel with 25-mm holes.


Dimensions

(Unit: mm)

Accessories


Legend Plate Frames

Standard Models A22Z-332□

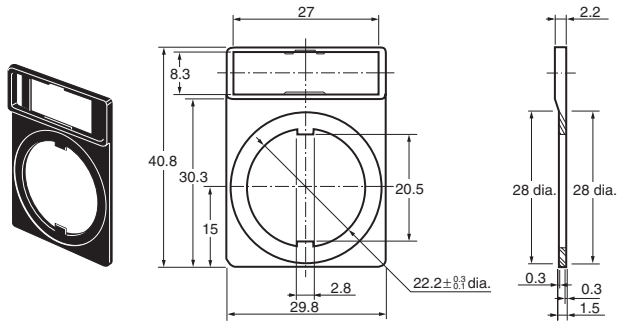


Large

A22Z-333□

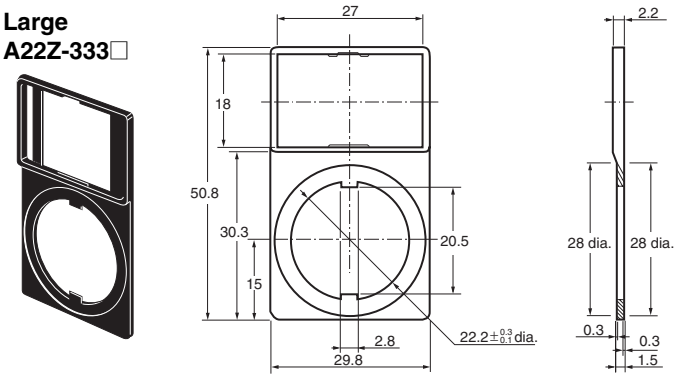


Lamp


LED A22-6□, 12□, 24□

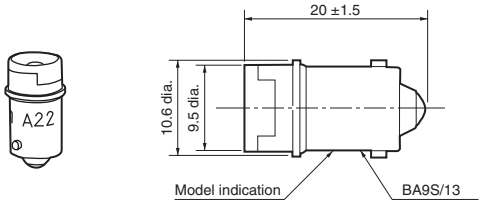


Incandescent lamp A22-5, 12, 24

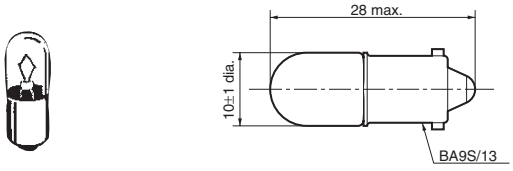


Lock Ring A22Z-3360

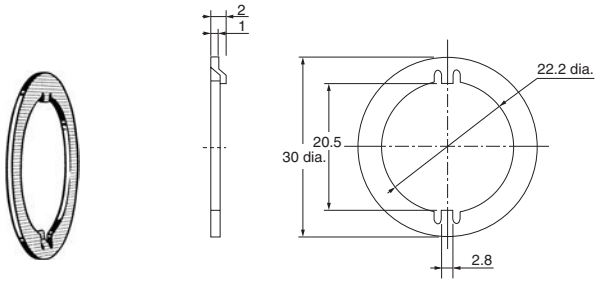


25-dia. Ring A22Z-R25

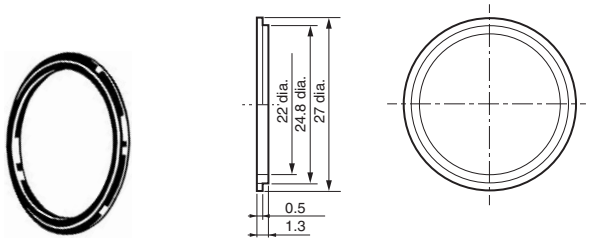

Color Cap A22Z-30T□

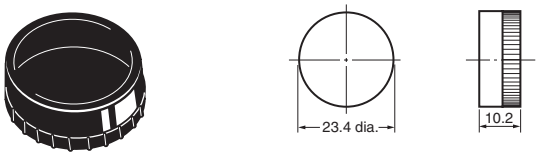


Hole Plug (Round) A22Z-3530

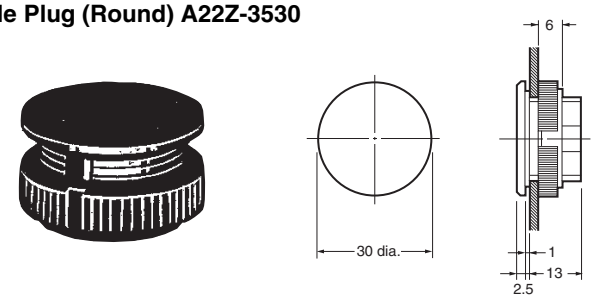


Caps

A22 (for round models) A22Z-3490

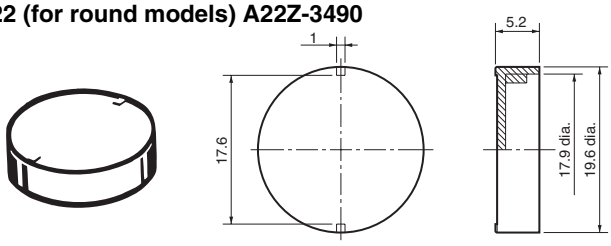

M22 (for round models) A22Z-3495

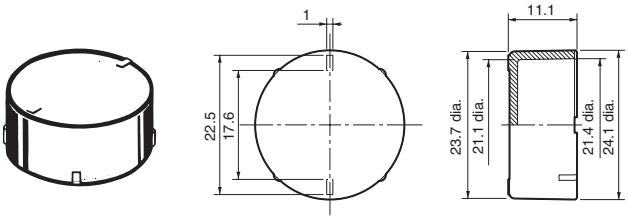


Dimensions


(Unit: mm)

Sealing Caps


For Flat Models A22Z-3600F

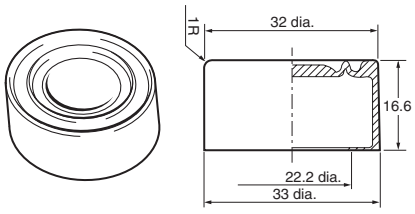

For projection models A22Z-3600T

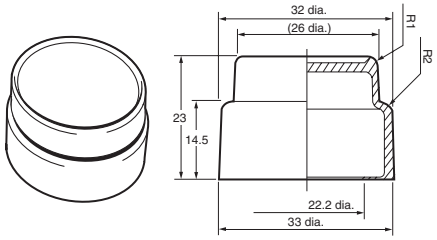


For full-guard models A22Z-3600G

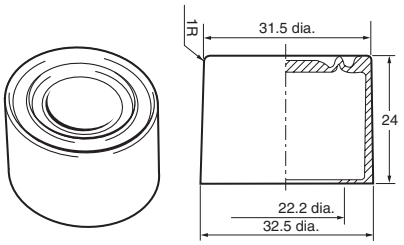


Metallic Bezel Rings

For Flat/Projection Models A22Z-3580

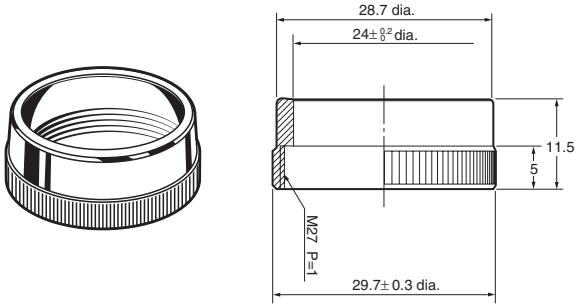


For full-guard models A22Z-3582

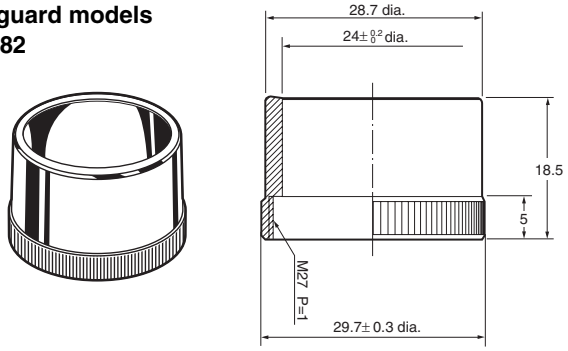


Snap-in Legend Plates

For Standard Models A22Z-3443□-□

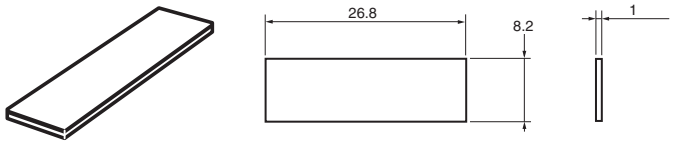


For Large Models A22Z-3453□

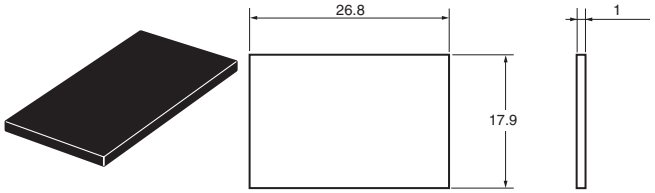


For Emergency-stop Models



A22Z-3476-1 (90 dia.)

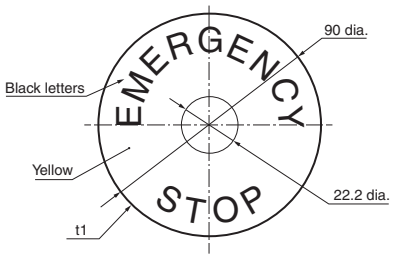


A22Z-3466-1 (60 dia.)




Character Film

For Round Models A22Z-3460-□

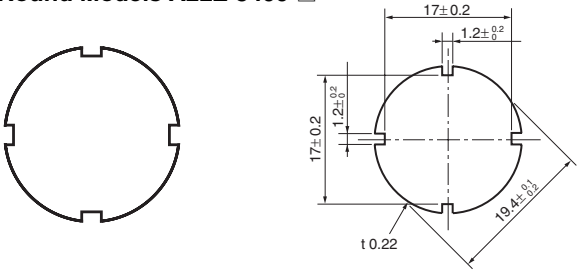


For Square Models A22Z-3480

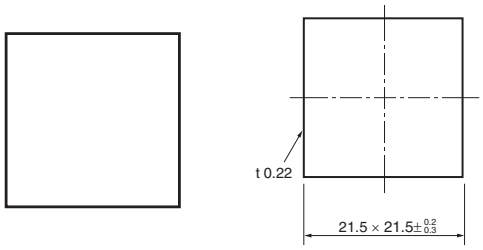


Dimensions

(Unit: mm)


Lamp Extractor A22Z-3901

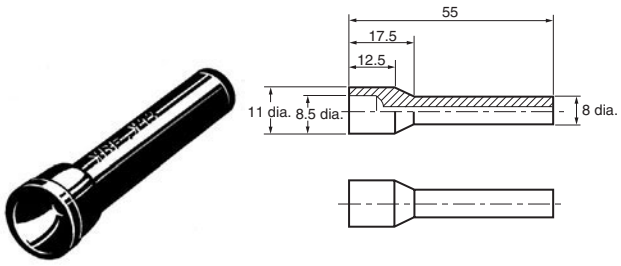


Tightening Wrench A22Z-3905

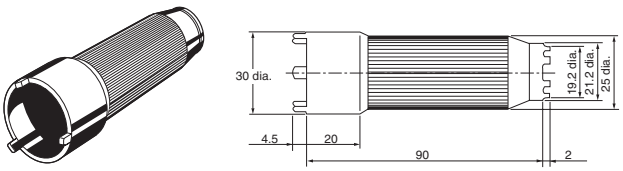


Cap Tightening Tool A22Z-3908

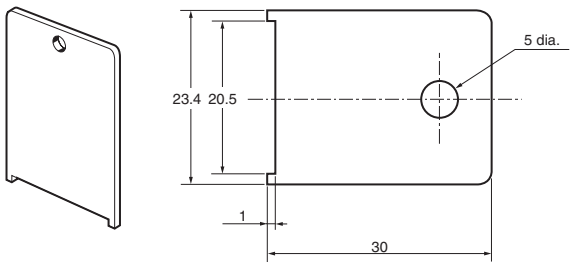


30-dia. Resin Attachment A22Z-A30

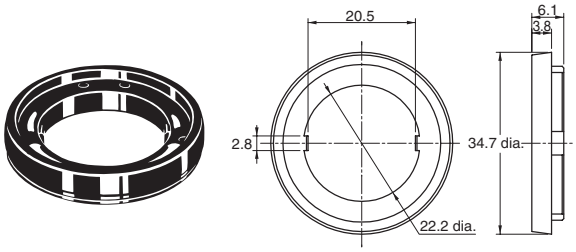


Cap Puller A3PJ-5080

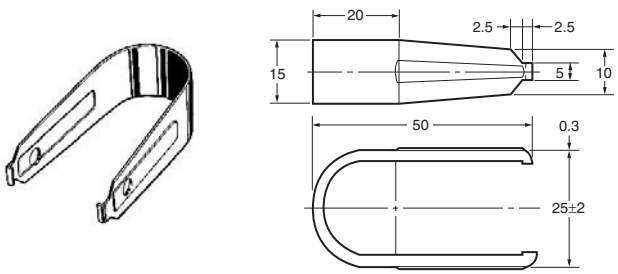


Lock Plate A22Z-3380

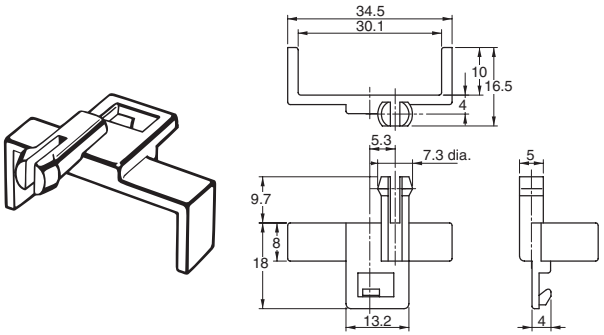

Simple Protective Cover A22Z-3700

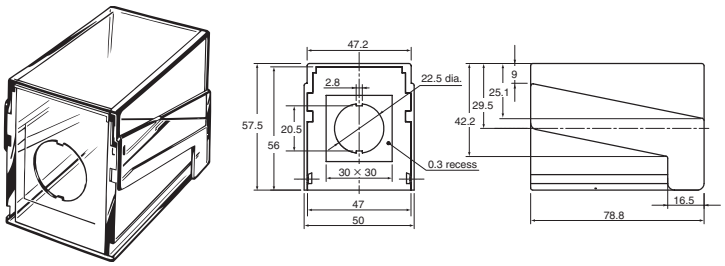


Three-throw Spacer A22Z-3003

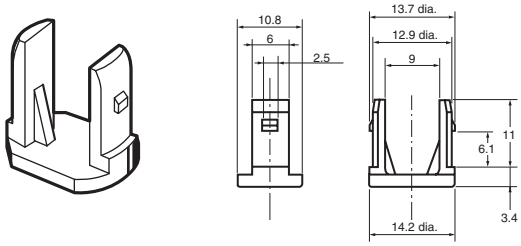


Dimensions


(Unit: mm)

Control Box (Enclosure) A22Z-B10□




A22Z-B101 (One Hole)
A22Z-B101Y

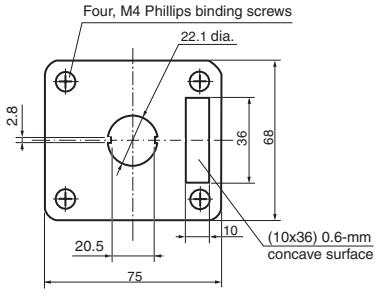





* A22Z-B101: gray
A22Z-B101Y: yellow

Cable Port Hole (Top View)




A22Z-B102 (Two Holes)

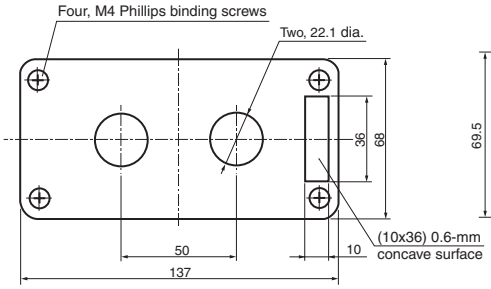





Cable Port Hole (Top View)

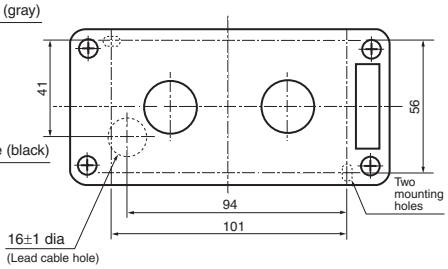


A22Z-B103 (Three Holes)

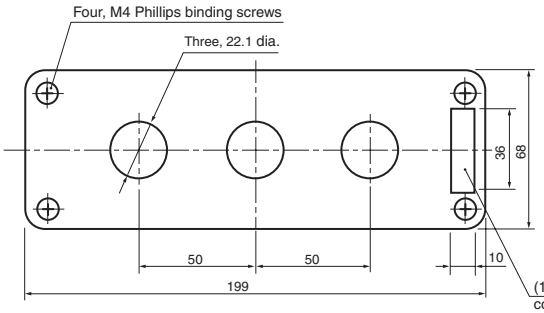




Cable Port Hole (Top View)

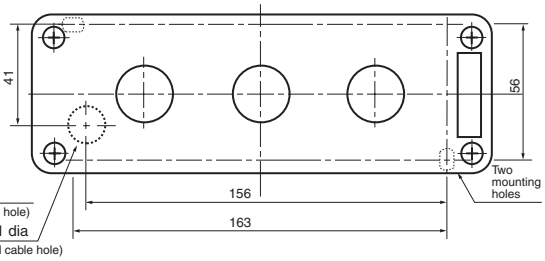

(Panel Mounting Hole)





Dimensions

(Unit: mm)

Control Box A22Z-B20□


A22Z-B201 (One Hole)
A22Z-B201Y

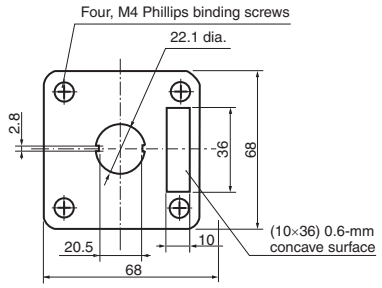





* A22Z-B201: gray
A22Z-B201Y: yellow

Cable Port Hole (Top View)




A22Z-B202 (Two Holes)

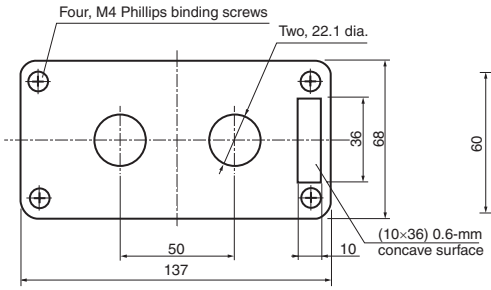

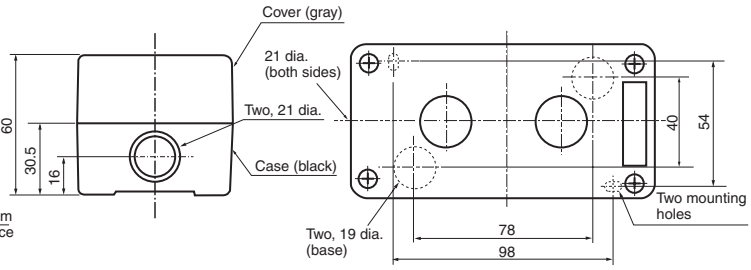


Cable Port Hole (Top View)

A22Z-B203 (Three Holes)

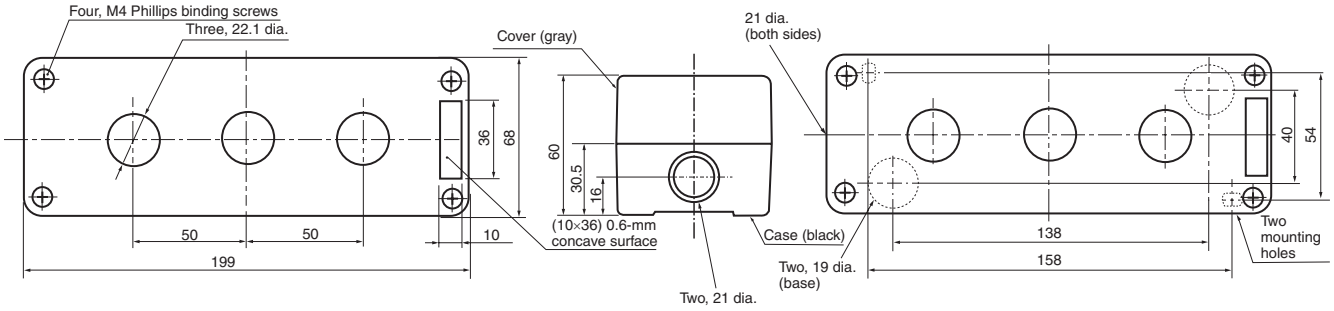

Cable Port Hole (Top View)

(Panel Mounting Hole)



Safety Precautions

Refer to *Safety Precautions for All Pushbutton Switches/Indicators*.

⚠ WARNING

Do not apply a voltage between the incandescent lamp and the terminal that is greater than the rated voltage. If the incandescent lamp is broken, the Operation Units may pop out.

Always turn OFF the power and wait for 10 minutes before replacing the incandescent lamp. If the lamp is replaced immediately after the power is turned OFF, the remaining heat may cause burns.

Precautions for Correct Use

Mounting

- Do not perform wiring with power supplied to the Switch. Do not touch the terminals or other charged parts of the Switch while power is being supplied. Doing so may result in electric shock.
- Always make sure that the power is turned OFF before mounting, removing, or wiring the Switch, or performing maintenance.
  Do not tighten the mounting ring more than necessary using tools such as pointed-nose pliers. Doing so will damage the mounting ring.
  The tightening torque is 0.98 to 1.96 N·m.
- Recommended panel thickness: 1 to 5 mm.
- When mounting the caps after changing the LED or the caps, tighten the caps at a tightening torque of 0.49 tp 0.78 N·m.


Wiring

- Terminal screws must be Phillips or slotted M3.5 screws with a square washer.
- The tightening torque is 1.08 to 1.27 N·m.
- Solid wires, stranded wires, and crimp terminals can be connected to the Switch.


Applicable Wire Size

Stranded wire: 2 mm^2 max.
Solid wire: 1.6 dia. max.

Bare Crimp Terminals



Crimp Terminals with Insulating Sheath



- After wiring the Switch, maintain an appropriate clearance and creepage distance.

Operating Environment


- The IP65 model is designed with a degree of protection so that it will not sustain damage if it is subjected to water from any direction to the front of the panel.
- This switch is intended for indoor use only.
  Using the Switch outdoors will result in failure.

LED

- The LED current-limiting resistor is built-in, so internal resistance is not required.
- If commercially available LEDs are used, select the ones that meet the following conditions:
  Base: BA9S/13
  Overall length: 26 mm max.
  Power consumption: 2.6 W max.
  When DC-specific LEDs are used, wire the Switch so that the X1 terminal is positive.
- Mis-lighting of the LED
  The LED lights with approx. 0.1 mA or less of micro-current. Take a countermeasure like adding a resistor to prevent mis-lighting in parallel to the LED.
  The micro-current varies with the machine (leak current or stray capacity between cables, etc.). Select resistance value and allowable power consumption that meet the actual current.

(Circuit example)

In case of using 24 VAC/VDC, Direct lighting




Others

- If the panel is to be finished with coating, etc., make sure that the panel meets the specified dimensions after the coating.
- Do not subject the Switch to extreme shock or vibration. Doing so will cause malfunctions and damage to the Switch.

Using the Microload

- Insert a contact protection circuit, if necessary, to prevent the reduction of life expectancy due to extreme wear on the contacts caused by loads where inrush current occurs when the contact is opened and closed.
  The minimum applicable load is the N-level reference value. This value indicates the malfunction reference level for the reliability level of 60% (λ 60) (conforming to JIS C5003).
  The equation, λ 60 = 0.5 x 10^{-6}/operations indicates that the estimated malfunction rate is less than 1/2,000,000 operations with a reliability level of 60%.

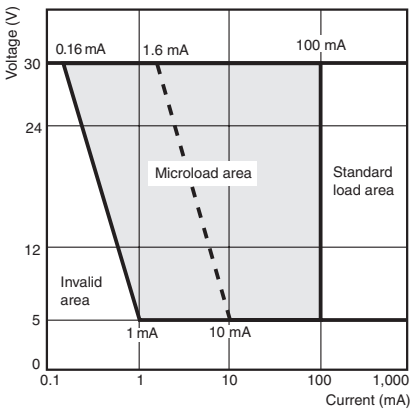


Application

Mounting to the Panel

Panel Hole Dimensions

- Panel hole dimensions are given below.
- Recommended panel thickness: 1 to 5 mm.

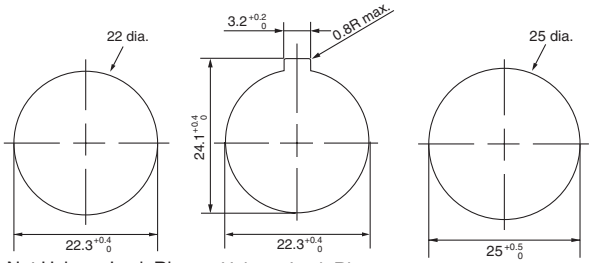


Not Using a Lock Ring Using a Lock Ring


- For 25-dia. holes, always use 25-dia. Rings. (Since the cutout dimensions are large, IP65 cannot be guaranteed unless 25-dia. Rings are used.)
- If outer surface treatment such as coating is performed for the panel, the panel dimensions after outer surface treatment must meet the specified panel dimensions.

Matrix Installation

1. The following panel hole dimensions apply when Switch Unit and the Standard-size Legend Plate Frame and Lock Ring are mounted, and lead wires are connected directly to the Switch Block.



2. The following panel hole dimensions apply when the Large-size Legend Plate Frame is mounted, and when crimp terminals are connected to the Switch Block terminals.



Pitches A and B between the centers of the mounting holes are as follows:

For 1. above:

Switch Blocks	A
A22-10, A22-10S A22-01, A22-01S	45 mm min.
A22-20, A22-20S, A22-02 A22-02S, A22-11, A22-11S	55 mm min.

For 2. above:


Type of crimp terminal	Switch Blocks	B
Bare crimp terminals	A22-10, A22-10S A22-01, A22-01S	51 mm min.
	A22-20, A22-20S, A22-02 A22-02S, A22-11, A22-11S	61 mm min.
Crimp terminals with insulating sheath	A22-10, A22-10S A22-01, A22-01S	60 mm min.
	A22-20, A22-20S, A22-02 A22-02S, A22-11, A22-11S	70 mm min.

Note: 1. The above dimensions are the minimum dimensions for when the wires described under Applicable Wire Size on page 23 are used. If a different wires are used, the wiring dimensions may be different so determine an appropriate pitch before setup.
2. With pushbuttons of external dimensions greater than 30 mm, set the pitch according to the dimensions. (When using matrix installation for the A22-M□, mount with a pitch of 40 mm instead of 30 mm in the diagram above.)


Mounting the Operation Unit on the Panel

- Insert the Operation Unit (Pushbutton, etc.) from the front surface of the panel, insert the Lock Ring and the mounting nut from the terminal side, then tighten the nut. Before tightening, check that the rubber washer is present between the Pushbutton Unit and the panel.
- When using a Legend Plate Frame, put one rubber washer each between the Legend Plate Frame and the panel and between the Operation Unit and the Legend Plate Frame. (One rubber washer will be provided when one Legend Plate Frame is ordered.)
- Align the Lock Ring with the groove in the casing, then insert the Lock Ring so that its edge is located on the panel side.

- Tighten the mounting nut at a torque of 0.98 to 1.96 N·m.
- When using a Lock Ring, replace with the supplied Lock Ring, insert the projecting part into the lock slot, and then tighten the mounting nut.

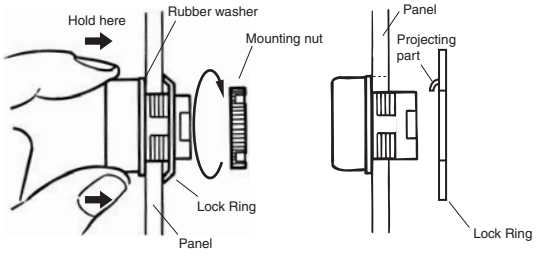


- When the panel cutout dimension is 25 dia., remove the supplied rubber washer and mount the 25-dia. Ring as shown below. (Since the A22Z-R25 is not attached to the main body, order separately.)

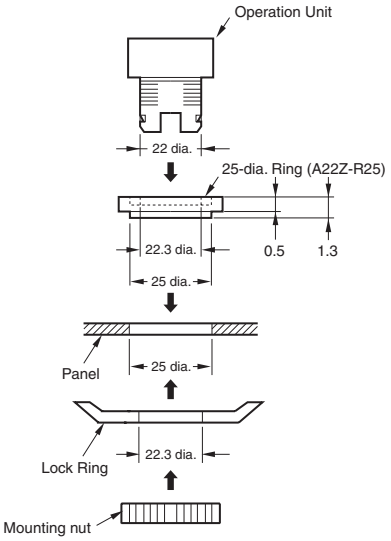


Mounting the Switch on the Pushbutton Unit

- Insert the Pushbutton Unit into the Switch Unit, aligning the arrow mark inscribed on the Case with the lever on the Switch Blocks, then move the lever in the direction indicated by the arrow in the following figure.



Removing the Switch


- Move the lever in the direction indicated by the arrow in the following figure, then pull the Pushbutton Unit or the Switch Blocks. Since the lever has a hole with an inside diameter of 6.5 mm, the lever can be moved in the specified direction by inserting a screwdriver into the hole and then moving the screwdriver.

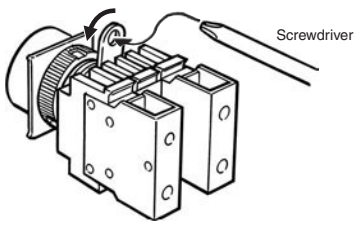

Mounting/Replacing the Color Cap


Projection, Fall-guard

- Grip and rotate the Color Cap with your fingers.



Half-guard Indicators


- Put the tips of the Cap Tightening Tool (A22Z-3908) into the Color Cap slot and turn the Tool.



Assembling the Cap


Lighted Pushbutton Switch

- Mount the Color Cap so that the protrusions inside the cap fit into the grooves in the Pushbutton Unit.

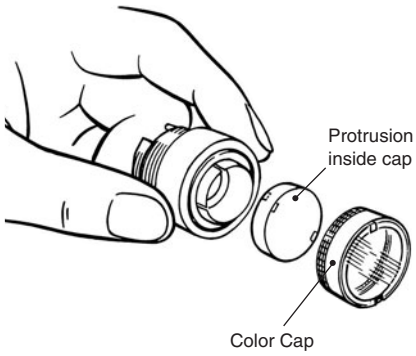


Indicator

- Mount the Color Cap so that the protrusions inside the Pushbutton Unit fit into the grooves in the cap.

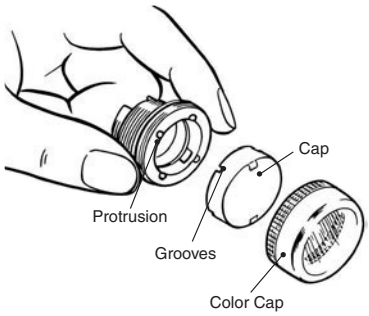


Square Pushbutton/Indicator

- Square Pushbutton/Indicator
  Insert the protruding tip of the Cap Puller (A3PJ-5080) into the Cap slot, hold the plate spring, and pull them to remove the Color Cap.




- Mounting the Color Cap:
  Mount the Color Cap on the flange and firmly push the Color Cap. When the Color Cap is inserted, check whether it operates properly. When replacing the Lamp, remove the Color Cap and diffusion plate with fingers or Cap Puller.
  Attach the Character Film properly so that it fits inside the protruding part of the diffusion plate. Then, match the diffusion plate to the square flange and insert the Cap.

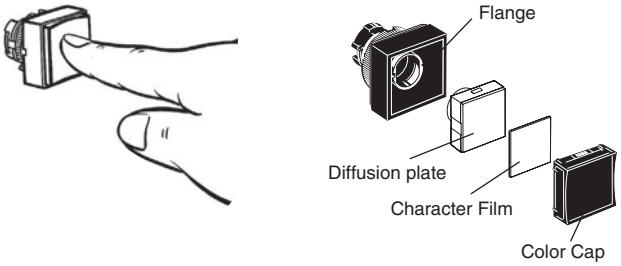

Emergency Stop Switch


- Insert the protrusion of the Tightening Wrench (A22Z-3905) into the Cap slot and then turn to remove the Cap.

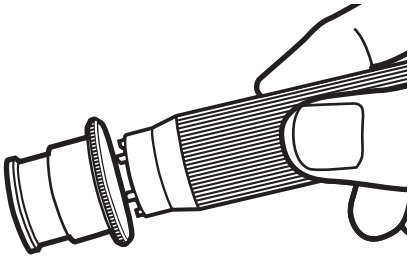

Installing/Replacing the Lamp


Installing/Replacing from the Panel Surface

- Insert the Lamp Extractor (A22Z-3901) into the lamp, then rotate the Extractor while pressing it.

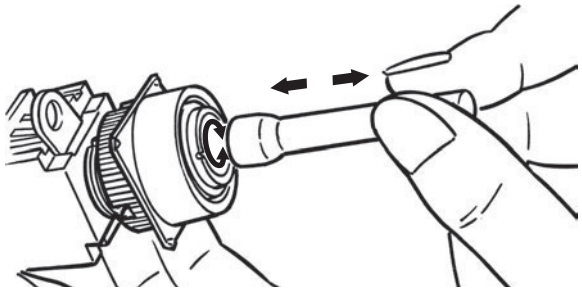

Installing/Replacing on the Switch


- Grip the lamp with your fingers, then rotate the lamp while pressing it against the Switch.

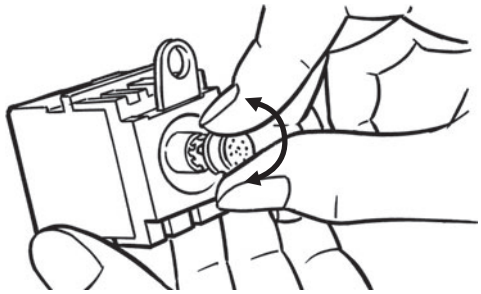

Control Box (Enclosure)


Mounting the Switch

The Standard-size Legend Plate Frame can be mounted. Mount the Frame as shown in the following diagram. Mount the Switch in the same way as for an ordinary panel.



Creating a Cable Port Hole


Place the tip of a screwdriver on the surface where the cable port hole is to be created with the cover attached and strike the screwdriver with a hammer to punch four holes.

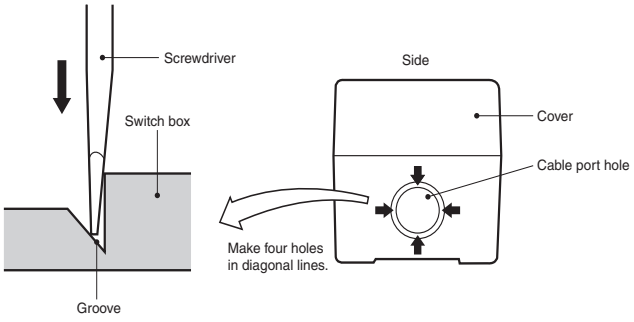

Securing the Connector Cable

1. Insert the connector into the cable port hole in the Box and secure with the fixing nut inside the box.
2. Open a hole in the thin rubber section of the rubber ring.
3. Pass the tightening cap through the cable, insert the cable into the connector, and tighten the hexagonal nut to secure the cable.


Cable diameter	Connector
7 to 9 dia.	A22Z-3500-1
9 to 11 dia.	A22Z-3500-2

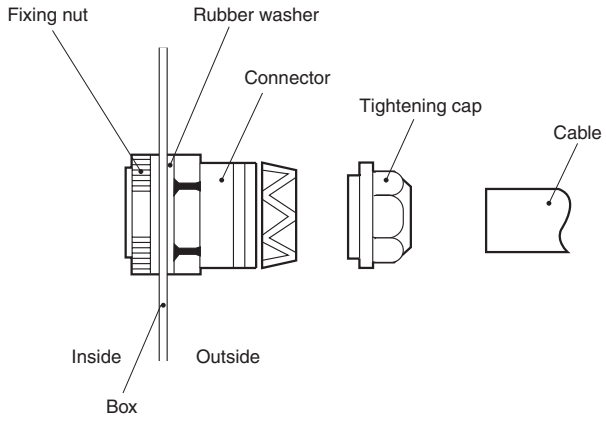

Switch Blocks


Installing the Switch Blocks


- Hook the small protrusion on the Switch Block into the groove on the Mounting Latch on the other side of the lever, then push up the Switch Block in the direction indicated by the arrow in the figure below.

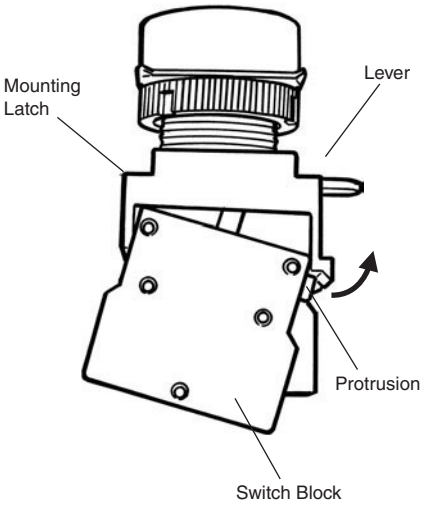

Removing the Switch Blocks

- Insert a screwdriver between the Mounting Latch and the Switch Block, then push down the screwdriver in the direction indicated by the arrow in the following figure.




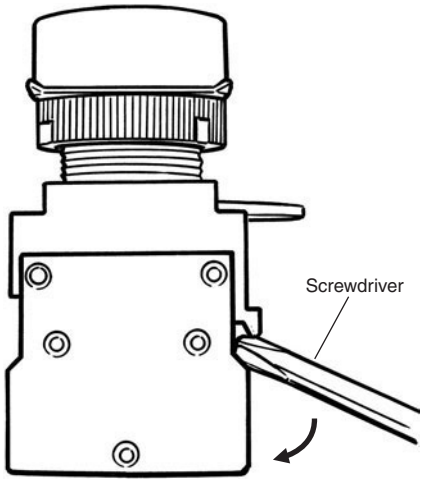

Wiring

Wiring Round Crimp Terminals

- Loosen the terminal screw from the Switch Unit until it completely comes off the groove, insert a screwdriver as shown in the following figure, then push up the washer in the direction indicated by the arrow to temporarily secure it. Now, a round crimp terminal can be connected. After inserting the terminal, tighten the screws to complete wiring.

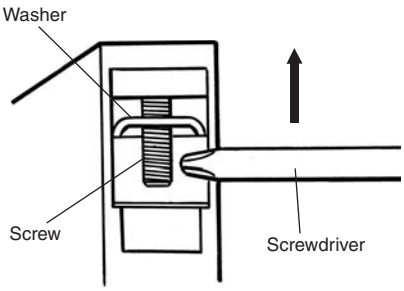


Engraving

- Engrave the characters on the surface on the Cap. Make sure that the characters are aligned parallel to the imaginary line connecting the two protruding portions to the left and right of the Cap.
- The characters must not be engraved deeper than 0.5 mm. Apply an alcohol-based paint coating, such as melamine, alkyd, or acrylic resin paint coating, to the engraved characters.




Affixing Character Film

- Hold the Cap, remove the cardboard on the Film, and attach the Film to the Cap. Make sure that the protruding portions of the Cap engage he cutout portions of the Film and that the characters are aligned parallel to the imaginary line connecting the two protruding portions to the left and right of the Cap.

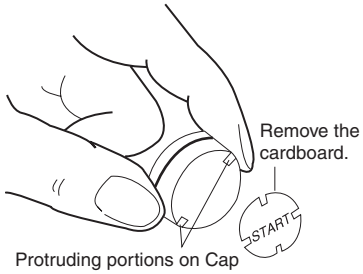


Mounting and Dismounting Snap-in Legend


- Press and secure the Snap-in Legend Plate onto the Legend Plate Frame.
- The direction of the characters will vary with the mounting direction of the control panel if the Switch is a knob or key selector model.

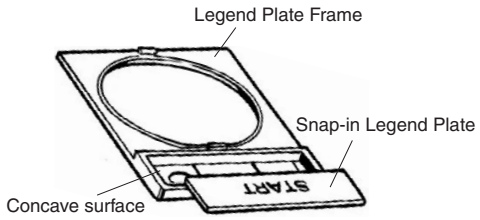

- To easily remove the Snap-in Legend Plate from the Legend Plate Frame mounted to the panel, insert a Tool with a thin tip into the space between the Snap-in Legend Plate and the Legend Plate Frame.

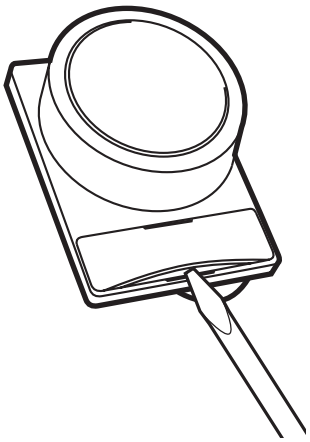

- The Snap-in Legend Plate is easily removed by pressing the Snap-in Legend Plate from the back of the Legend Plate Frame.
- The Legend Plate Frame is made of acrylic resin, which is easily damaged by shock. Be sure to handle the Legend Plate Frame with care.




Engraving Method

Material: Acrylic


- Engrave the characters directly on the matted side of the Snap-in Legend Plate.
- The characters must be engraved no deeper than 0.5 mm.
- Apply alcohol-based paint coating to the engraved characters.
- If the Snap-in Legend Plate is transparent, engrave the mirror-written characters on the back of the Snap-in Legend Plate and apply paint coating to the characters. Then apply paint coating of a different color to the remaining part of the Snap-in Legend Plate.

Mounting Three-throw Spacer

Press and secure the two protruding portions of the Three-throw Spacer to the two indented portions of the inner side of the control panel.

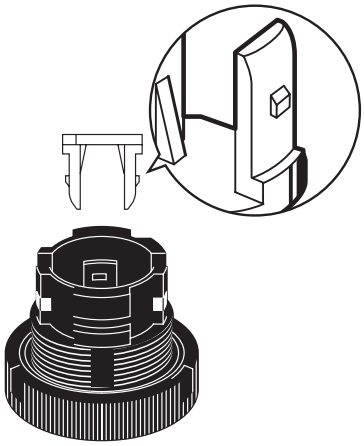

Mounting the 30-dia. Resin Attachment

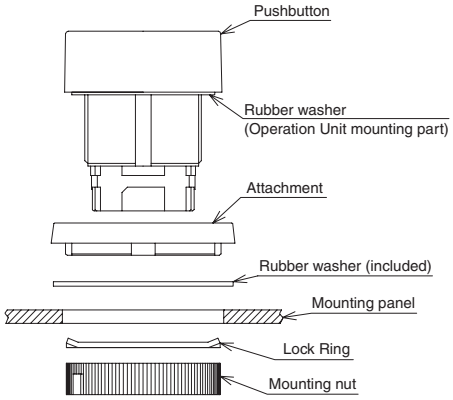

Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2012.9

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation
Industrial Automation Company

http://www.ia.omron.com/

(c)Copyright OMRON Corporation 2012 All Right Reserved.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP