ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *OMRON J7MN-3R-10* at our website: *Click HERE*

Motor Protection Circuit Breaker
J7MN

MPCB system

- Rotary and switch types
- Rated operational current 32 A, 63 A and 100 A
- Switching capacity up to 100 kA/400 V
- Fixed short-circuit release = 13 x I_u
- Overload release adjustable 0.65 - 1 x I_u
- Motor protection CLASS 10
- Fulfill all needed standards



Options

- ON/OFF indication
- Trip alarm/indication
- Undervoltage release
- Shunt release
- Three phase busbar system
- Moulded plastic enclosures
- Door coupling rotary mechanisms
- Insulated Link modules

Ordering Information

■ Model Number Legend

1. Motor Protection Circuit Breaker

J7MN-□□-□□□
1 2 3

1) Motor Protection Circuit Breaker
2) Type/range
3) Setting range

2. Options for MPCB

J77MN-□□-□□□
1 2 3

1) Options MPCB
2) Auxiliary contacts
   T: Trip indicator
   U: Undervoltage release
   S: Shuntrelease
   DC: Door-coupling
   HU: DIN-rail adaptors
   V: Link modules
   PF: Enclosure
3) Other specifications

3. Busbars, line side terminals and shrouds

J75-□□□-□□□
1 2 3

1) Options MPCB
2) CPM: Busbars
   BTC: Line side
   TA: Shrouds
3) Other specifications

Downloaded from www.Manualslib.com manuals search engine
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ System overview

Motor Protection Circuit Breaker

	Rated Current In A	Suitable for motors 3~400 V kW	Setting range Thermal Overload Release A	Instantaneous Short Circuit Release A	Short Circuit Breaking Capacity at 3~400 V kA (Icu)	Type
J7MN-3P 	0.16	-	0.10 - 0.16	2.1	100	**J7MN-3P-E16**
	0.25	0.06	0.16 - 0.25	3.3	100	**J7MN-3P-E25**
	0.4	0.09	0.25 - 0.4	5.2	100	**J7MN-3P-E4**
	0.63	0.18	0.4 - 0.63	8.2	100	**J7MN-3P-E63**
	1	0.25	0.63 - 1	13	100	**J7MN-3P-1**
	1.6	0.55	1 - 1.6	20.8	100	**J7MN-3P-1E6**
	2.5	0.75	1.6 - 2.5	32.5	100	**J7MN-3P-2E5**
	4	1.5	2.5 - 4	52	100	**J7MN-3P-4**
	6	2.2	4 - 6	78	100	**J7MN-3P-6**
	8	3	5 - 8	104	100	**J7MN-3P-8**
	10	4	6 - 10	130	50	**J7MN-3P-10**
	13	5.5	9 - 13	169	50	**J7MN-3P-13**
	17	7.5	11 - 17	221	20	**J7MN-3P-17**
	22	7.5	14 - 22	286	15	**J7MN-3P-22**
	26	11	18 - 26	338	15	**J7MN-3P-26**
	32	15	22 - 32	416	15	**J7MN-3P-32**
J7MN-3R 	0.16	-	0.10 - 0.16	2.1	100	**J7MN-3R-E16**
	0.25	0.06	0.16 - 0.25	3.3	100	**J7MN-3R-E25**
	0.4	0.09	0.25 - 0.4	5.2	100	**J7MN-3R-E4**
	0.63	0.18	0.4 - 0.63	8.2	100	**J7MN-3R-E63**
	1	0.25	0.63 - 1	13	100	**J7MN-3R-1**
	1.6	0.55	1 - 1.6	20.8	100	**J7MN-3R-1E6**
	2.5	0.75	1.6 - 2.5	32.5	100	**J7MN-3R-2E5**
	4	1.5	2.5 - 4	52	100	**J7MN-3R-4**
	6	2.2	4 - 6	78	100	**J7MN-3R-6**
	8	3	5 - 8	104	100	**J7MN-3R-8**
	10	4	6 - 10	130	100	**J7MN-3R-10**
	13	5.5	9 - 13	169	100	**J7MN-3R-13**
	17	7.5	11 - 17	221	50	**J7MN-3R-17**
	22	7.5	14 - 22	286	50	**J7MN-3R-22**
	26	11	18 - 26	338	50	**J7MN-3R-26**
	32	15	22 - 32	416	50	**J7MN-3R-32**
J7MN-6R 	26	12.5	18 - 26	338	50	**J7MN-6R-26**
	32	15	22 - 32	416	50	**J7MN-6R-32**
	40	18.5	28 - 40	520	50	**J7MN-6R-40**
	50	22	34 - 50	650	50	**J7MN-6R-50**
	63	30	45 - 63	819	50	**J7MN-6R-63**
J7MN-9R 	63	30	45 - 63	819	50	**J7MN-9R-63**
	75	37	55 - 75	975	50	**J7MN-9R-75**
	90	45	70 - 90	1170	50	**J7MN-9R-90**
	100	-	80 - 100	1300	50	**J7MN-9R-100**

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com
Downloaded from www.Manualslib.com manuals search engine

Accessories

	Description	Mounting place	Max. per MPCB	Contacts NO	Contacts NC	Rated Operating Current AC15 24 V A	AC15 240 V A	AC1 240 V A	Type
Transverse Auxiliary 	Contact block	Front	1	1	1	3	2	5	**J77MN-11F**
				2	-	3	2	5	**J77MN-20F**
				-	2	3	2	5	**J77MN-02F**
Side Auxiliary 	Contact block	Left hand side	1	1	1	6	4	10	**J77MN-11S**
				2	-	6	4	10	**J77MN-20S**
				-	2	6	4	10	**J77MN-02S**
Any Trip Alarm 	Signalling switch	Left hand side	1	1	1	6	4	10	**J77MN-TA-11S**
Short circuit Trip Alarm 	Signalling switch	Left hand side	1	1	1	6	4	10	**J77MN-T-11S**

	Description	Mounting place	Max. per MPCB	Rated voltages	Type
Undervoltage Release 	Trips the circuit-breaker when the voltage is interrupted. Prevents the motor from being restarted accidentally when the voltage is restored, suitable for EMERGENCY STOP acc. to VDE 0113	Right hand side	1	24 V 50 Hz, 28 V 60 Hz	**J77MN-U-24**
				110 - 127 V 50 Hz, 120 V 60 Hz	**J77MN-U-110**
				220 - 230 V 50 Hz, 240 - 260 V 60 Hz	**J77MN-U-230**
				240 V 50 Hz, 277 V 60 Hz	**J77MN-U-240**
				380 - 400 V 50 Hz, 440 - 460 V 60 Hz	**J77MN-U-400**
				415 - 440 V 50 Hz, 460 - 480 V 60 Hz	**J77MN-U-415**
Shunt Release 	Trips the circuit-breaker when the release coil energized.	Right hand side	1	24 V 50 Hz, 28 V 60 Hz	**J77MN-S-24**
				110 - 127 V 50 Hz, 120 V 60 Hz	**J77MN-S-110**
				220 - 230 V 50 Hz, 240 - 260 V 60 Hz	**J77MN-S-230**
				240 V 50 Hz, 277 V 60 Hz	**J77MN-S-240**
				380 - 400 V 50 Hz, 440 - 460 V 60 Hz	**J77MN-S-400**
				415 - 440 V 50 Hz, 460 - 480 V 60 Hz	**J77MN-S-415**

	Description		Type
Enclosure 	Plastic enclose with rotary operating mechanism, lockable space for aux. contact + release		**J77MN-PF-3R**
	Enclose with rotary operating mechanism yellow - red, lock space for aux. contact + release		**J77MN-PFC-3R**
Door-coupling rotary 	The door-coupling rotary operating mechanisms consist of a knob, a coupling driver and an extension shaft (5 mm x 5 mm, lenght 330 mm). The door-coupling rotary operating mechanisms are designed for degree of protection IP 65. The door locking device prevents accidental opening of the cubicle door in the ON position of the circuit-breaker. The OFF position can be locked with up to 3 padlocks.	Mechanism black, with supporting bracket	**J77MN-DC-B**
		Mechanism; red/yellow, with supporting bracket	**J77MN-DC-RY**
Link modules 	Mechanical and electrical connection between Motor Protection Circuit Breaker and Contactor. Up-to max. 32 A.	Mini Motor Contactor J7KNA	**J77MN-VKA-3**
		Motor Contactor J7KN	**J77MN-VKN-3**
		Motor Contactor J7KNG	**J77MN-VKG-3**
	Electrical connection between Motor Protection Circuit Breaker and Contactor.	Up-to 32 A	**J77MN-VD-3**
		Up-to 63 A	**J77MN-VD-6**
			J77MN-VDG-6
		Up-to 100 A	**J77MN-VD-9**

Downloaded from www.Manualslib.com manuals search engine
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

	Description		Type
DIN-rail adaptors 	For mechanical fixing of circuit-breaker and contactor. With two moveable DIN-rail clips for easy mounting & replacing. Can be connected to one 35W x 15H mm DIN-rail or two 35W x 7.5H mm DIN-rails.	For J7MN-3 and J7KN(G)-10 up-to J7KN(G)-40	**J77MN-HU-3**
	For mechanical fixing of circuit-breaker and contactor. Can be connected to one 35W x 15H mm DIN-rail or two 35W x 7.5H mm DIN-rails.	For J7MN-6 and J7KN(G)-24 up-to J7KNG-40 and/or J7KN-62	**J77MN-HU-6**
		For J7MN-9 and J7KN-50 up-to J7KN-74	**J77MN-HU-9**
Scale cover sealable 	for covering the current setting scale (1 bag with 10 units)		**J77MN-K**
Push-in lugs 	for screwing the circuit-breaker onto mounting plates. 2 units required (1 bag with 20 units)		**J77MN-L**
Insulation barriers 	Up to 600 V acc.UL 489 for increased distances and clearances acc. to UL Type "E“ 4 pcs per device (2 pcs on each side) (pack 2 units)		**J77MN-TB32**
			J77MN-TB100

Insulated 3-Phase Busbar System

	Description	Version	For Units (MPCB)	Pack pcs	Type
	3-phase busbars modular spacing = 45 mm In = 64 A*1	for 2 units	J7MN-3P J7MN-3R	1	**J75-CPM-2-45-6**
		for 3 units		1	**J75-CPM-3-45-6**
		for 4 units		1	**J75-CPM-4-45-6**
		for 5 units*2		1	**J75-CPM-5-45-6**
	3-phase busbars modular spacing = 54 mm In = 64 A*1	for 2 units	J7MN-3P J7MN-3R	1	**J75-CPM-2-54-6**
		for 3 units		1	**J75-CPM-3-54-6**
		for 4 units		1	**J75-CPM-4-54-6**
		for 5 units*2		1	**J75-CPM-5-54-6**
	3-phase busbars modular spacing = 54 mm In = 120 A*1	for 2 units	J7MN-6R	1	**J75-CPM-2-54-12**
		for 3 units		1	**J75-CPM-3-54-12**
		for 4 units*2		1	**J75-CPM-4-54-12**
	3-phase busbars modular spacing = 63 mm In = 120 A*1	for 2 units	J7MN-9R	1	**J75-CPM-2-63-12**
		for 3 units		1	**J75-CPM-3-63-12**
		for 4 units*2		1	**J75-CPM-4-63-12**
	Shrouds for unused terminals on the busbar system	for 64 A version		10	**J75-TA-63**
		for 120 A version			**J75-TA-120**
	Line side terminals to be used with busbar systems J75-CPM-...6 In = 64 A*1	IEC 60947 EN 60947 according to UL 508		1	**J75-BTC-25-IC**
		IEC 60947 EN 60947 according to UL 508E		1	**J75-BTC-25-EC**
	Line side terminals to be used with busbar systems J75-CPM-...12 In = 120 A*1			1	**J75-BTC-50-E**

*1 The sum of all added currents per module must not exeed the above mentioned nominal currents!

*2 For more than 5 units (64 A) and 4 units (120 A) the system can be extended accordingly by installing an additional busbar

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com
Downloaded from www.Manualslib.com manuals search engine

■ Components for Fuseless Load Feeders, DIN-rail Mounting

Type of coordination „1“ 3 x 415 V 10 kA (other conditions on request)

Motor	Contactor	Link-module	DIN-rail adaptor	Circuit-breaker
				
3~400 V up to …KW	Range	Model	Model	Range
4	J7KNA-09	J77MN-VKA	Not needed	J7MN-3P / J7MN-3R
	J7KN-10	J77MN-VKN-3		
	J7KN-10-xx VKN3	Included		
	J7KNG-10-xx D	J77MN-VKG-3		
5.5	J7KNA-12	J77MN-VKA	Not needed	J7MN-3P / J7MN-3R
	J7KN-14	J77MN-VKN-3		
	J7KN-14-xx VKN3	Included		
	J7KNG-14-xx D	J77MN-VKG-3		
7.5	J7KN-18	J77MN-VKN-3	Not Needed	J7MN-3P / J7MN-3R
	J7KN-18-xx VKN3	Included		
	J7KNG-18-xx D	J77MN-VKG-3		
11	J7KN-22	J77MN-VKN-3	Not Needed	J7MN-3P / J7MN-3R
	J7KN-22-xx VKN3	Included		
	J7KNG-22-xx D	J77MN-VKG-3		
	J7KN(G)-24	J77MN-VD-3	J77MN-HU-3	
	J7KN-24	J77MN-VD-6	J77MN-HU-6	J7MN-6R
	J7KNG-24	J77MN-VDG-6		
15	J7KN(G)-32	J77MN-VD-3	J77MN-HU-3	J7MN-3P / J7MN-3R
	J7KN-32	J77MN-VD-6	J77MN-HU-6	J7MN-6R
	J7KNG-32	J77MN-VDG-6		
18.5	J7KN-40	J77MN-VD-6	J77MN-HU-6	J7MN-6R
	J7KNG-40	J77MN-VDG-6		
22	J7KN-50	J77MN-VD-6	J77MN-HU-6	J7MN-6R
30	J7KN-62	J77MN-VD-6	J77MN-HU-6	J7MN-6R
	J7KN-62	J77MN-VD-9	J77MN-HU-9	J7MN-9R
37	J7KN-74	J77MN-VD-9	J77MN-HU-9	J7MN-9R
45	J7KN-85	Not available	Not available	J7MN-9R
55	J7KN-110	Not available	Not available	J7MN-9R











Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com
Downloaded from www.Manualslib.com manuals search engine

Specifications

■ Engineering data and Characteristics

Technical Data according to IEC/EN 60947-1, 60947-2, 60947-4-1 and VDE 0660

This table shows the rated ultimate short-circuit breaking capacity Icu and the rated service short-circuit breaking capacity Ics of the J7MN circuit-breakers with different operational voltages as a function of the rated current In of the circuit-breakers. The circuit-breakers can be fed at the top or bottom supply terminals without any reduction of the rated data.

If the short-circuit current exceeds the rated short-circuit breaking capacity of the circuit-breaker specified in the tables at the installation point, a back-up fuse is to be used. The maximum rated current for the back-up fuse is specified in the tables. These fuses are only suitable for the short-circuit-currents as indicated on the fuses.

Circuit-breaker	Rated current In	up to AC 240V*1			up to AC 400V*1 up to AC 415V*2			up to AC 440V*1 up to AC 460V*2			up to AC 500V*1 up to AC 525V*2			up to AC 690V*1		
		Icu	Ics	max. fuse*3 (gL/gG)	Icu	Ics	max. fuse*3 (gL/gG)	Icu	Ics	max. fuse*3 (gL/gG)	Icu	Ics	max. fuse*3 (gL/gG)	Icu	Ics	max. fuse*3 (gL/gG)
Type	A	kA	kA	A	kA	kA	A	kA	kA	A	kA	kA	A	kA	kA	A
J7MN-3P	0.16 to 0.63	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	1	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	1.6	100	100	--	100	100	--	100	100	--	100	100	--	3	3	20
	2.5	100	100	--	100	100	--	100	100	--	50	100	--	3	3	35
	4	100	100	--	100	100	--	100	38	50	15	38	50	3	3	40
	6	100	100	--	100	100	--	50	11	50	10	11	40	3	3	50
	8	100	100	--	100	100	--	15	11	63	10	8	40	3	3	63
	10	100	100	--	50	38	80	15	11	63	6	8	63	3	3	63
	13	100	100	--	50	38	80	10	8	80	6	5	63	3	3	63
	17	50	38	--	20	15	100	10	8	80	6	5	80	3	3	63
	22	40	30	125	15	11	100	8	6	100	6	5	80	3	3	63
	26	40	30	125	15	11	100	8	6	100	6	5	80	3	3	63
	32	30	22	125	15	11	100	6	4	100	5	4	80	3	3	63
J7MN-3R	0.16 to 1.0	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	1.6	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	2.5	100	100	--	100	100	--	100	100	--	100	100	--	8	8	35
	4	100	100	--	100	100	--	100	100	--	100	100	--	8	8	40
	6	100	100	--	100	100	--	100	100	--	100	100	--	6	6	50
	8	100	100	--	100	100	--	50	38	80	50	38	63	6	6	63
	10	100	100	--	100	100	--	50	38	80	50	38	80	6	6	63
	13	100	100	--	100	100	--	50	38	80	42	32	80	6	6	63
	17	100	100	--	50	38	100	20	15	80	10	8	80	4	4	63
	22	100	100	--	50	38	125	20	15	100	10	8	80	4	4	63
	26	100	100	--	50	38	125	20	15	100	10	8	80	4	4	63
	32	100	100	--	50	38	125	20	15	100	10	8	80	4	4	63
J7MN-6R	26	100	100	--	50	50	125	35	27	125	12	9	100	5	5	80
	32	100	100	--	50	50	125	35	27	125	10	8	100	5	5	80
	40	100	100	--	50	50	160	35	27	125	10	8	100	5	5	80
	50	100	100	--	50	50	160	35	27	125	10	8	100	5	5	80
	63	100	100	--	50	50	160	35	27	160	10	8	100	5	5	80
J7MN-9R	63	100	100	--	50	38	160	40	30	160	12	9	100	6	5	80
	75	100	100	--	50	38	160	40	30	160	8	6	125	5	4	100
	90	100	100	--	50	38	160	40	30	160	8	6	125	5	4	125
	100	100	100	--	50	38	160	40	30	160	8	6	125	5	4	125

-- No back-up fuse required
*1 10% overvoltage
*2 5% overvoltage
*3 Back up fuse required if short-circuit current at installation point > Icu

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com
Downloaded from www.Manualslib.com manuals search engine

Technical Data according to IEC/EN 60947-1, 60947-2, 60947-4-1 and VDE 0660

Main Circuit

Type		J7MN-3P	J7MN-3R	J7MN-6R	J7MN-9R
Number of poles		3			
Max. rated current Inmax (=max. rated operational current Ie)		32 A	32 A	63 A	100 A
Permissible ambient temperature	Storage/transport	-50 to +80°C			
	Operation	-20 to +60°C			
	Storage/transport	-58 to +176°F			
	Operation	-4 to +140°F			
Rated insulation voltage Ui		690 V*1		1000 V*2	
Rated impulse withstand voltage Uimp		6 kV		8 kV	
Rated operational voltage Ue		690 V			
Rated frequency		50/60 Hz			
Utilization category	IEC 60 947-2 (circuit-breaker)	A			
	IEC 60 947-4-1 (motor starter)	AC3			
Class	acc. to IEC 60 947-4-1	10			
Power loss Pv per circuit-breaker	In -> up to 4 A	9.8 W		-	
dependent on rated current In	In -> 6 up to 26 A	8 W		-	
(upper setting range)	In -> 32 A	3.9 W		-	
R per conducting path = P/I² × 3	In -> 26 up to 63 A	-	-	12.6 W	-
	In -> up to 63 A W	-	-	-	11.9 W
	In -> 75 up to 100 A	-	-	-	15 W
Shock resistance	acc. to IEC 68 Part 2-27	25 g			
Degree of protection	acc. to IEC 60 529	IP 20			
Shock hazard protection	acc. to DIN VDE 0106 Part 100	safe against finger touch			
Weight		0.32 kg	0.36 kg	1 kg	2.2 kg
Temperature compensation	acc. to IEC 60 947-4-1	-20 to +60°C			
Mechanical endurance	operating cycles	100,000		50,000	
Electrical endurance	operating cycles	100,000		25,000	
Max. operating frequency per hour (motor starts)	1/h	25			

*1 Suitable at 690 V for: earthed-neutral systems, overvoltage category I to IV, pollution degree 3 (standard-industry): U_{imp} = 6 kV.
*2 Suitable at 1000 V for: earthed-neutral systems, overvoltage category I to IV, pollution degree 3 (standard-industry): U_{imp} = 8 kV.
Data for other conditions on request.

Conductor cross-sections for main circuit

Type		J7MN-3	J7MN-6	J7MN-9
Screw type, terminal type		Pz2	Pz2	4 mm hexagon socket screw
Tightening torque		0.8 to 2.5 Nm	3 to 4.5 Nm	4 to 6 Nm
		7 to 22 lb-in	26 to 39 lb-in	35 to 53 lb-in
Conductor cross-sections	solid	1 x (1 to 10) mm²	1 x (0.75 to 35) mm²	1 x (2.5 to 70) mm²
		2 x (1 to 6) mm²	2 x (0.75 to 25) mm²	2 x (2.5 to 50) mm²
		1 x (18 to 8) AWG	1 x (18 to 2) AWG	1 x (12 to 2/0) AWG
		2 x (18 to 10) AWG	2 x (18 to 4) AWG	2 x (12 to 1/0) AWG
	stranded	1 x (1 to 6) mm²	1 x (0.75 to 35) mm²	1 x (2.5 to 70) mm²
		2 x (1 to 6) mm²	2 x (0.75 to 25) mm²	2 x (2.5 to 50) mm²
		1 x (18 to 10) AWG	1 x (18 to 2) AWG	1 x (12 to 2/0) AWG
		2 x (18 to 10) AWG	2 x (18 to 4) AWG	2 x (12 to 1/0) AWG
	flexible	1 x (1 to 6) mm²	1 x (0.75 to 25) mm²	1 x (2.5 to 50) mm²
		2 x (0.75 to 4) mm²	2 x (0.75 to 16) mm²	2 x (2.5 to 35) mm²
		1 x (18 to 10) AWG	1 x (18 to 4) AWG	1 x (12 to 1/0) AWG
		2 x (18 to 10) AWG	2 x (18 to 6) AWG	2 x (10 to 2) AWG


Downloaded from www.Manualslib.com manuals search engine
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Auxiliary switches


Aux. Type	Switching capacity		Control voltage	
J77MN-11F / 20F / 02F & J77MN-T(A) Front transverse auxiliary switch with 1 NO + 1 NC, 2 NO, 2 NC	Rated operational voltage	Ue	24 VAC	240 VAC
	Rated operational current	Ie/AC-15	3 A	2 A
		Ie/AC-12 Ith	5 A	5 A
	Rated operational voltage	Ue L/R 200 ms	24 VDC	220 VDC
	Rated operational current	Ie/DC-13	1 A	0.1 A
J77MN-11S / 20S / 02S Lateral auxiliary switch with 1 NO + 1 NC, 2 NO, 2 NC & two signalling switches with 1 NO + 1 NC	Rated operational voltage	Ue	24 VAC	240 VAC
	Rated operational current	Ie/AC-15	6 A	4 A
		Ie/AC-12 Ith	10 A	
	Rated operational voltage	Ue L/R 200 ms	24 VDC	220 VDC
	Rated operational current	Ie/DC-13	2 A	0.25 A
J77MN-U Undervoltage release	Power consumption	during pick-up	8.5 VA / 6 W	
		uninterrupted duty	3 VA / 1.2 W	
	Response voltage	trip	0.7 to 0.35 × Us (V)	
		pick-up	0.85 to 1.1 × Us (V)	
J77MN-S Shunt release	Power consumption	during pick-up	8.5 VA / 6 W	
		uninterrupted duty	3 VA / 1.2 W	
	Response voltage	trip	0.7 to 1.1 × Us (V)	
Short-circuit protection for auxiliary and control circuits	Fuse gL/gG		10 A	
	Miniature circuit breaker C-characteristic		6 A	
Conductor cross-sections for auxiliary and control circuits			Screw-type Pz2	
		solid	1 x (0.5 to 2.5) / 2x (0.5 to 2.5) mm²	
		flexible	1 x (0.5 to 4) / 2 x (0.75 to 2.5) mm²	
		solid AWG	1 x (20 to 14) / 2 x (20 to 14) AWG	
		flexible AWG	1 x (20 to 10) / 2 x (18 to 14) AWG	

Time/Current characteristic

J7MN-3P & J7MN-3R

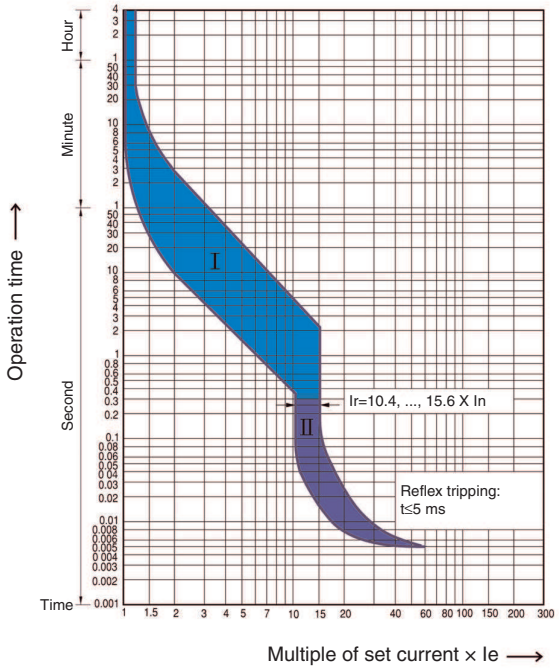

J7MN-6R & J7MN-9R

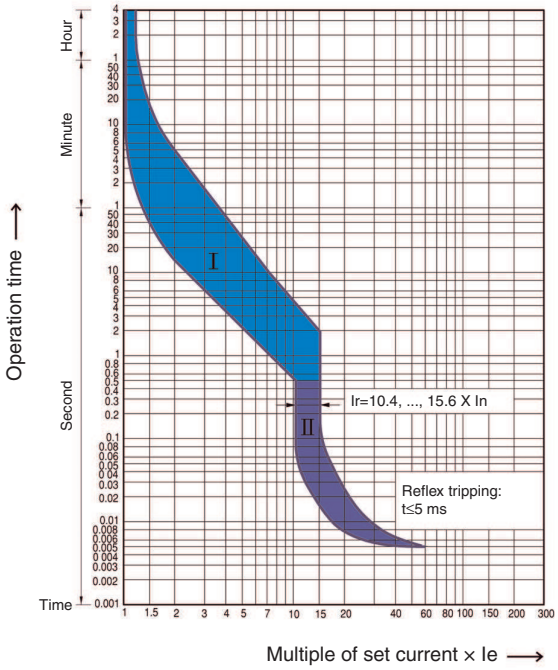

I The curve shows the mean operating current at an ambient temperature of 20°C starting from cold.

II The tripping characteristic of electromagnetic overcurrent releases (short-circuit releases)

The tripping characteristic of the inverse-time delayed overload releases apply for DC and AC with a frequency of 0 to 400 Hz.

At operating temperature, the tripping times of the thermal releases are reduced to approximately 25 %.

The characteristic shown here is a schematic representation of circuit-breakers for all ranges.

Current limiting characteristics and I^2t characteristics are available on request.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com
Downloaded from www.Manualslib.com manuals search engine

Permissible ratings of devices approved for North America

Circuit breakers J7MN as „Manual Motor Starter“

If used as „Manual Motor Starter“ the circuit breaker is always operated in combination with a short circuit device. For use with approbated fuses or circuit breakers according to UL489 or CSA22.2 No. 5 only. The sizes are selected according to National Electrical Code (UL), or Canadian Electrical Code (CSA)

			J7MN-3																
Rated operational current		Ie	**0.16**	**0.25**	**0.4**	**0.63**	**1**	**1.6**	**2.5**	**4**	**6**	**8**	**10**	**13**	**17**	**22**	**26**	**32**	A
Max. short-circuit current	**J7MN-3P**	240 V	100	100	100	100	100	100	100	100	100	100	50	50	40	30	30	20	kA
		480 V	50	50	50	50	50	50	50	50	25	25	10	10	10	10	7.5	7.5	kA
		600 V	10	10	10	10	10	10	10	5	5	5	5	5	5	5	5	5	kA
	J7MN-3R	240 V	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	kA
		480 V	50	50	50	50	50	50	50	50	50	50	50	50	30	30	30	30	kA
		600 V	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	kA
Motor load 1-phase		115 V	-	-	-	-	-	-	-	1/8	1/4	1/3	1/2	1/2	1	1 1/2	2	2	HP
		230 V	-	-	-	-	-	1/10	1/6	1/3	1/2	1	1 1/2	2	3	3	5	5	HP
Motor load 3-phase		200 V	-	-	-	-	-	-	1/2	3/4	1	2	2	3	3	5	7 1/2	7 1/2	HP
		230 V	-	-	-	-	-	1/3	1/2	1	1 1/2	2	3	3	5	7 1/2	7 1/2	10	HP
		460V	-	-	-	-	1/2	3/4	1	2	3	5	5	7 1/2	10	15	15	20	HP
		600V	-	-	-	-	1/2	1	1 1/2	3	5	5	10	10	15	20	20	30	HP
Max. rated fuse			1	1	1	1	3	6	10	15	20	30	40	50	60	80	100	125	A
Max. breaker size			15	15	15	15	15	15	15	15	20	30	40	50	60	80	100	125	A

		J7MN-6R					J7MN-9R				
Rated operational current	Ie	**26**	**32**	**40**	**50**	**63**	**63**	**75**	**90**	**100**	A
Max. short-circuit current	240 V	100	100	100	100	100	100	100	100	100	kA
	480 V	50	50	50	50	50	25	25	25	25	kA
	600 V	10	10	10	10	10	10	10	10	10	kA
Motor load 1-phase	115 V	2	3	3	5	5	5	7 1/2	10	10	HP
	230 V	5	5	7 1/2	10	15	15	15	20	20	HP
Motor load 3-phase	230 V	10	10	15	15	20	25	25	30	40	HP
	460V	20	25	30	40 1/2	50	50	60	75	75	HP
	600V	25	30	40	50	60	60	75	100	100	HP
Max. rated fuse		100	125	150	200	250	250	300	350	400	A
Max. breaker size		100	125	150	200	250	250	300	350	400	A

Circuit breakers J7MN as "Combination Motor Controller Type E" and " Suitable for Group Installation"

Acc to UL508 demands a line-side 1 inch air and 2 inch creepage distance for „Combination Motor Controller Type E“ is necessary. Therefor circuitbreaker J7MN-3R is approved to UL 508 in combination with the Terminal block J7MN-TB32. Circuit-breakers J7MN-9R are approved to UL 508 in combination with the insulation barriers J7MN-TB100. According to CSA these terminal blocks can be omitted when the device is used as "Combination Motor Controller Type E“.

			J7MN-3R + J77MN-TB32																
Rated operational current		Ie	**0.16**	**0.25**	**0.4**	**0.63**	**1**	**1.6**	**2.5**	**4**	**6**	**8**	**10**	**13**	**17**	**22**	**26**	**32**	A
Max. short-circuit current		240 V	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	kA
		480 V	50	50	50	50	50	50	50	50	50	50	50	50	30	30	30	30	kA
		600 V	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	kA
Motor load 1-phase		115 V	-	-	-	-	-	-	-	1/8	1/4	1/3	1/2	1/2	1	1 1/2	2	2	HP
		230 V	-	-	-	-	-	1/10	1/6	1/3	1/2	1	1 1/2	2	3	3	5	5	HP
Motor load 3-phase		200 V	-	-	-	-	-	-	1/2	3/4	1	2	2	3	3	5	7 1/2	7 1/2	HP
		230 V	-	-	-	-	-	1/3	1/2	1	1 1/2	2	3	3	5	7 1/2	7 1/2	10	HP
		460V	-	-	-	-	1/2	3/4	1	2	3	5	5	7 1/2	10	15	15	20	HP
		600V	-	-	-	-	1/2	1	1 1/2	3	5	5	10	10	15	20	20	30	HP
Max. rated fuse or breaker			500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	A

Downloaded from www.Manualslib.com manuals search engine
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

		J7MN-6R					J7MN-9R + J7MN-TB100				
Rated operational current	Ie	**26**	**32**	**40**	**50**	**63**	**63**	**75**	**90**	**100**	A
Max. short-circuit current	240 V	100	100	100	100	100	100	100	100	100	kA
	480 V	50	50	50	50	50	40	40	40	40	kA
	600 V	10	10	10	10	10	10	10	10	10	kA
Motor load 1-phase	115 V	2	3	3	5	5	5	$7^1/_2$	10	10	HP
	230 V	5	5	$7^1/_2$	10	15	15	15	20	20	HP
Motor load 3-phase	230 V	10	10	15	15	20	25	25	30	40	HP
	460V	20	25	30	40	50	50	60	75	75	HP
	600V	25	30	40	50	60	60	75	100	100	HP
Max. rated fuse or breaker		600	600	600	600	600	1,000	1,000	1,000	1,000	A

	Combination Motor Controller Type E		
Ratings of auxiliary switches and alarm switches	Lateral auxiliary switch with J77MN-xxS and signalling switch J77MN-T	Transversal auxiliary switch with J77MN-xxF	
Breaking capacity	A600	A300	AC
	Q300	R300	DC

Descriptions

Releases

Circuit-breakers J7MN are equipped with bimetallic-based, inverse-time delayed overload releases and with instantaneous overcurrent releases (electromagnetic short-circuit releases). The overload releases can be set in accordance with the load current. The over-current releases are permanently set to a value 13 times the rated current and thus enable trouble-free start-up of motors. The scale cover can be sealed to prevent unauthorized adjustments to the set current.

Operating mechanisms

Circuit-breakers J7MN-3P are actuated via a rocker operating mechanism and circuit-breakers J7MN-3R, J7MN-6R and J7MN-9R via a rotary operating mechanism. An electrical signal can be output, at all Circuit-breakers, via a signalling switch to indicate that the Circuit-breaker has tripped. All operating mechanisms can be locked in the 0 position with a padlock (shackle diameter 3.5 to 4.5 mm). The J7MN Circuit-breakers fulfil the isolation characteristics specified in IEC 60947-2.

Operating conditions

Circuit-breakers J7MN are suitable for use in any climate. They are designed for operation in enclosed rooms under normal conditions (e. g. no dust, corrosive vapours or harmful gases). Suitable enclosures must be provided for installation in dusty or damp rooms. Circuit-breakers J7MN can also be fed from below. In order to prevent premature tripping due to phase failure sensitivity, the three conducting paths must always be uniformly loaded. The conducting paths must be connected in series in the case of single-phase loads.

Short-circuit protection

The short-circuit releases of J7MN circuit-breakers disconnect the faulty load feeder from the system in the event of a short circuit and thus prevent any further damage from being caused. Circuit-breakers with a short-circuit breaking capacity of 50 kA or 100 kA at a voltage of 400 V AC are practically short-circuit-proof at this voltage, as higher short-circuit currents are not usually encountered at the installation point. Back-up fuses are only necessary if the short-circuit current at the installation point exceeds the rated ultimate short-circuit breaking capacity of the circuit-breakers.

Motor protection

The tripping characteristics of J7MN circuit-breakers are designed mainly to protect three-phase induction motors. The circuit-breakers are therefore also referred to as Manual Motor Starters. The current of the motor to be protected is set with the aid of the scale.


Line protection

J7MN Circuit-breakers for motor protection are also suitable for line protection. The J7MN Circuit-breakers fulfil the isolation conditions of IEC 60 947-3 as well as the additional test conditions for circuit-breakers with isolation characteristics specified in IEC 60947-2. Taking IEC 60 204-1 into consideration, they can thus be implemented as main and EMERGENCY STOP switches. Door-coupling rotary operating mechanism do not fulfil the isolation characteristics.

Wiring diagrams


Circuit breakers

J7MN




Traverse Aux. Contact blocks

J77MN-11F J77MN-20F J77MN-02F

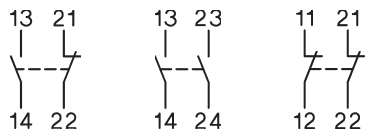

Aux. Contact Block (side mounted)

J77MN-11S J77MN-20S J77MN-02S

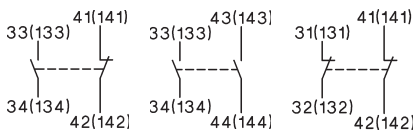


Alarm Switch

J77MN-T-11S J77MN-TA-11S




Undervoltage Release

J77MN-U-...



Shunt Release


J77MN-S-...




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com
Downloaded from www.Manualslib.com manuals search engine

Dimensions

Circuit-breaker J7MN-3P




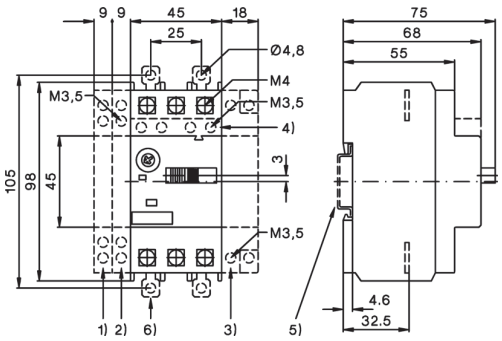


Height of arcing spaces
(clearance from earthed parts)

at Ue (V)	240	415	460	525	690
mm	20	20	20	20	20
inch	0.8	0.8	0.8	0.8	0.8

Circuit-breaker J7MN-3R




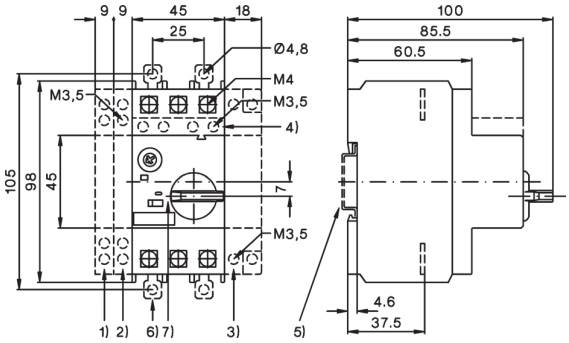


Height of arcing spaces
(clearance from earthed parts)

at Ue (V)	240	415	460	525	690
mm	30	30	30	30	50
inch	1.18	1.2	1.18	1.18	2

Circuit-breaker J7MN-6R




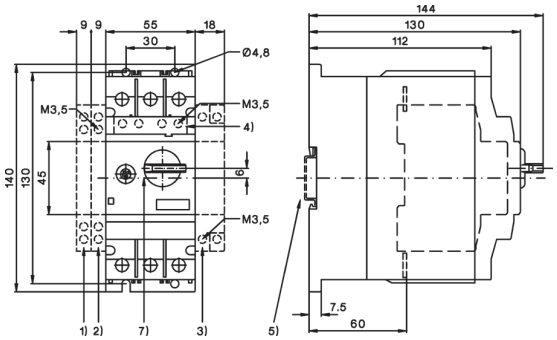


Height of arcing spaces
(clearance from earthed parts)

at Ue (V)	240	415	460	525	690
mm	50	50	50	50	50
inch	2	2	2	2	2

Circuit-breaker J7MN-9R



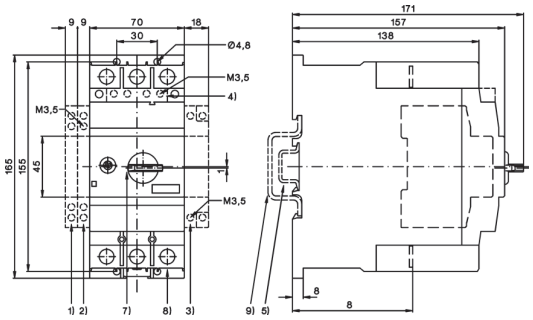

Height of arcing spaces
(clearance from earthed parts)


at Ue (V)	240	415	460	525	690
mm	50	70	70	110	150
inch	2	2¾	2¾	4,33	6

All
1) Side aux. contact
2) Magnetic trip alarm
3) Shunt or undervoltage release of arcing
4) Transverse aux. contact
5) 35 mm DIN-rail acc. to EN 50022


3P/3R
3R/6R/9R
9R
6) Push-in Lugs for screw mounting
7) Handle lock in OFF-position (5 mm)
8) 4 mm hexagon socket screw
9) 70 mm DIN-rail acc. to EN 50023

Downloaded from www.Manualslib.com manuals search engine
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Enclosure J77MN-PF

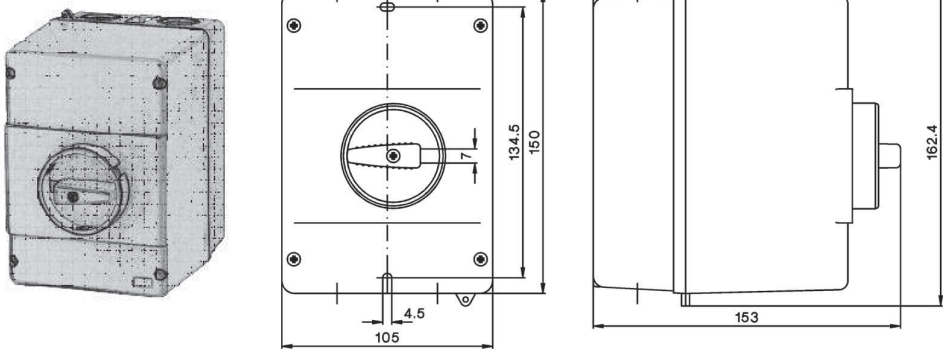

Door-coupling rotary operating mechanism J77MN-DC

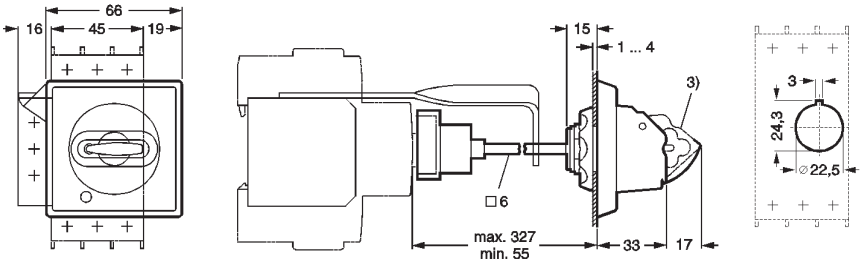

1) Max. for shackle diameter for padlock 8 mm

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. J08E-EN-02 In the interest of product improvement, specifications are subject to change without notice.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com
Downloaded from www.Manualslib.com manuals search engine

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP