

Fujinon CPT-70F-02A  
**Pan and Tilt Head**



**In Stock**

**Used and in Excellent Condition**

**Open Web Page**

<https://www.artisanng.com/91269-1>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

# Pan & Tilt Lenses



**CPT-70F-02A**

*Technology That Inspires...*

**FUJINON**

# PAN & TILT HEAD SPECIFICATIONS




MODEL	CPT-70F-02A
Pan Range	300°
Pan Speed	25° / Sec.
Tilt Speed	20° / Sec
Tilt Range	+/- 95°
Stopping Accuracy	+/- 5'
Lens Type	MD
Acoustic Noise	NC40db
Load Capacity	4 kg / 8.8 lbs.
Power Consumption	DC 15V/10W (max)
Operating Temperature	-10° C ~ +50° C
Power Source (ESC-103K-04A)	15V DC
Drive System	DC Servo
Weight	2.3 kg / 5.06 lbs.
Dimensions WxDxH (mm)	130 x 102 x 222
Max. Cable Length	1350 m / 4430 ft.

\* From power supply (CPS-401A-10DA) \*\*EOP-102J-60B not available on CPT-70D-02A


## PAN & TILT

### EOP-102J-70B

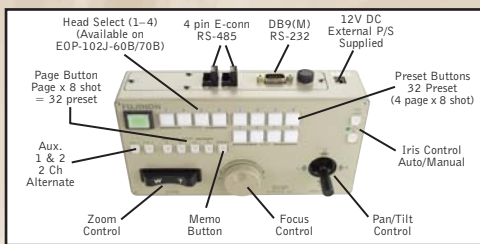

## PAN & TILT


### EPT-7G-H2A CONFIGURATIONS

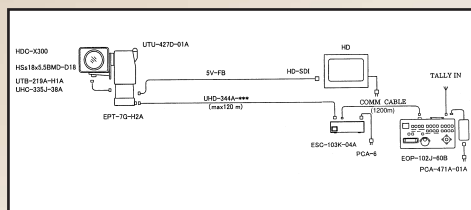

## PAN & TILT CONTROLLERS



	EOP-102J-30E	EOP-102J-60B	EOP-102J-70B
Operation	RS-485 via twisted pair cable – E-connector/RS-232 via DB-9 connector		
Pan / Tilt	Variable-speed joystick		
Zoom	Variable-speed rocker switch		
Focus	Variable-speed potentiometer		
Iris	Close, open, auto, remote		
Shot Memory	32	32 per head	32 per head
Back-up	Reservable for more than 5 years (Lithium battery)		
Qty of Head Control	1	4	4
Auxiliary Input	2 auxiliary relay contacts for controlling accessory equipment at the pan and tilt head		
Power Source	120 VAC via 12 VDC adapter (included)		
Power Consumption	5 W		
Camera Control		Camera On/Off Shutter Speed Gain Adjust, Color Bar Auto White, Auto Black	
Weight	Approximately 0.8 kg		

### CPT-70F/70D CONFIGURATIONS

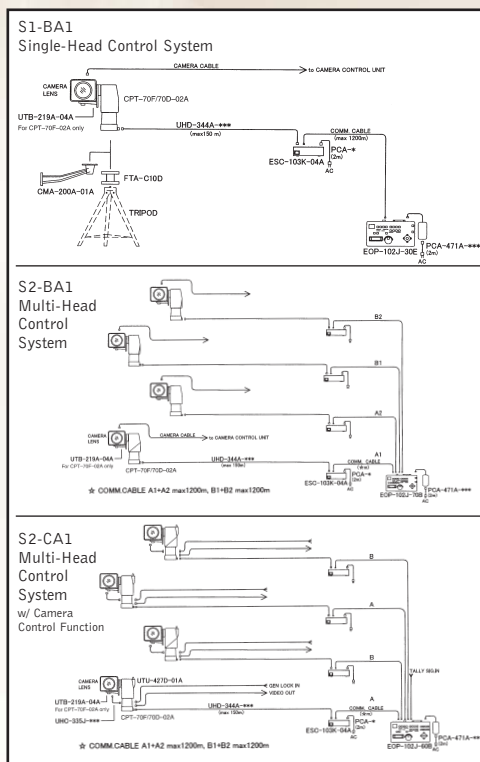

## COMPATIBILITY WITH EXISTING SYSTEMS

Compatibility with existing CPT-1A and EPT-5E systems is possible by the utilization of certain adaptors. The diagrams below depict some common configuration scenarios.

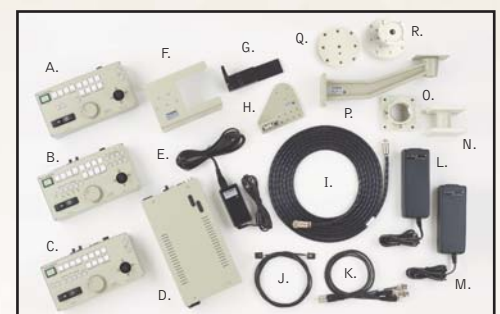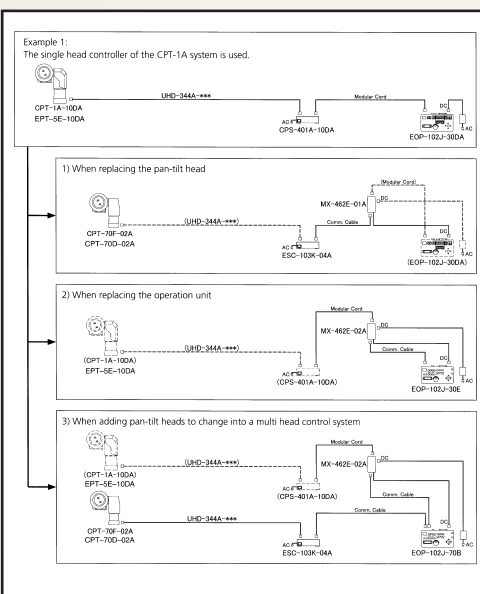

For Sales Contact Information go to  
**www.Fujinon.com**

# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](https://www.artisanng.com)

