

HP 8657B

## Signal Generator with Option 003



**\$2200.00**

**In Stock**

**Qty Available: 1**

**Used and in Excellent Condition**

**Open Web Page**

<https://www.artisanng.com/69338-6>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

This literature was published years prior to the establishment of Agilent Technologies as a company independent from Hewlett-Packard and describes products or services now available through Agilent. It may also refer to products/services no longer supported by Agilent. We regret any inconvenience caused by obsolete information. For the latest information on Agilent's test and measurement products go to:

[www.agilent.com/find/products](http://www.agilent.com/find/products)

Or in the US, call Agilent Technologies at 1-800-452-4844 (8am–8pm EST)



**Agilent Technologies**

# **HP 8656/57 Series Economical Synthesized Signal Generators Analog and Digital Modulation**

## **Technical Data**

**HP 8656B, 8657A/B,  
8657D, 8657A/B Opt 022**

### **HP 8656/57 Series Synthesized Signal Generators**

The HP 8656/57 series is designed to meet the testing needs of the communication industry. Test AM, FM, and pulsed receivers as well as components. Use it in R&D, manufacturing, and support. There are six signal generators

in the family, all offering exceptional analog modulation, good spectral purity, and superb output level performance.


#### **HP 8657D**

The HP 8657D adds  $\pi/4$  DQPSK modulation. Test radios designed for the North American Digital Cellular Radio System and Japanese Digital Cellular System.

#### **HP 8657A/B Option 022**


For European digital communication systems, the HP 8657A/B Option 022 generates 0.3 Gaussian Minimum Shift Keying (0.3 GMSK). Test receivers designed for the GSM Pan-European Digital Cellular Radio System and the PCN European Personal Communications Network.

## The Choice is Yours

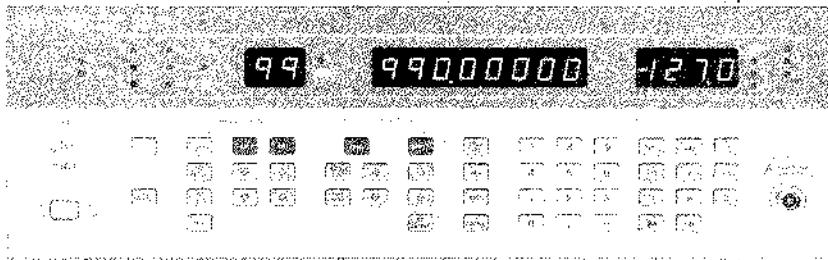


### HP 8656B

- 100 kHz to 990 MHz
- AM & FM
- 25 watts RPP
- Lowest cost of family
- In-channel performance

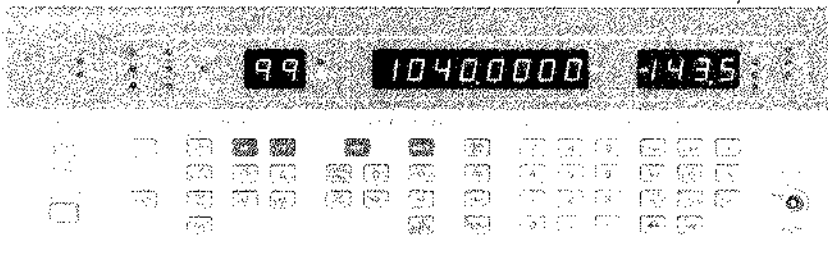


### HP 8657A

- 100 kHz to 1040 MHz
- AM & FM
- Low SSB phase noise
- Electronic attenuator for ATE
- Levels to -143.5 dBm
- 50 watts RPP
- In-channel and out-of-channel performance

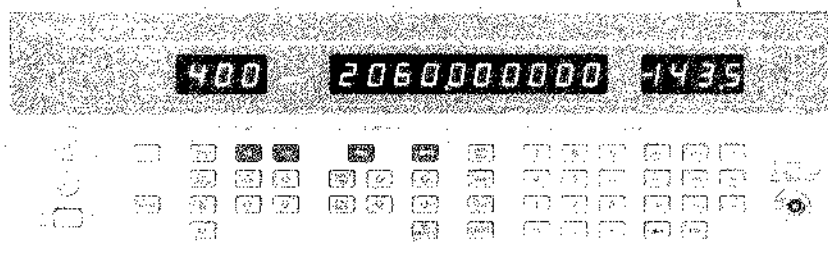


### HP 8657B

- 100 kHz to 2060 MHz
- AM, FM, & pulse (option)
- Low SSB Phase Noise
- Levels to -143.5 dBm
- 50 watts RPP
- 1 Hz Frequency resolution
- In-channel and out-of-channel performance

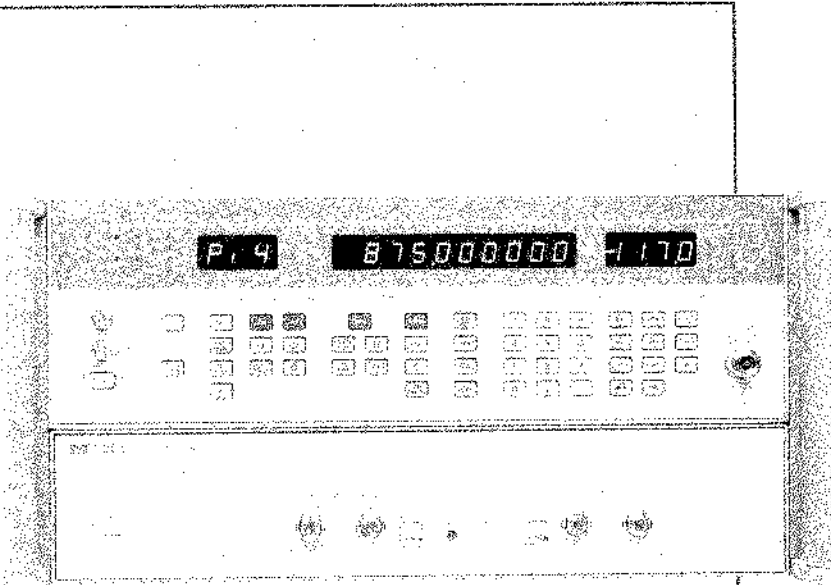


#### **HP 8657D**

- 100 kHz to 1030 MHz AM & FM
- $\pi/4$  DQPSK for NADC and JDC
  - 10 to 129.9 MHz
  - 810 to 965 MHz
  - 1420 to 1540 MHz data inverted
- Pulse modulation
- <4% error vector magnitude

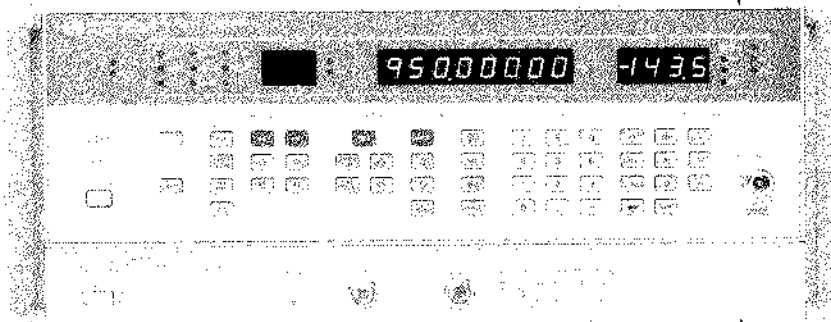

#### **HP 8657A Option 022**

- 100 kHz to 1040 MHz AM & FM
- 0.3 GMSK for GSM
  - 520 to 1040 MHz
  - 10 to 130 MHz data inverted
- <3° rms phase error

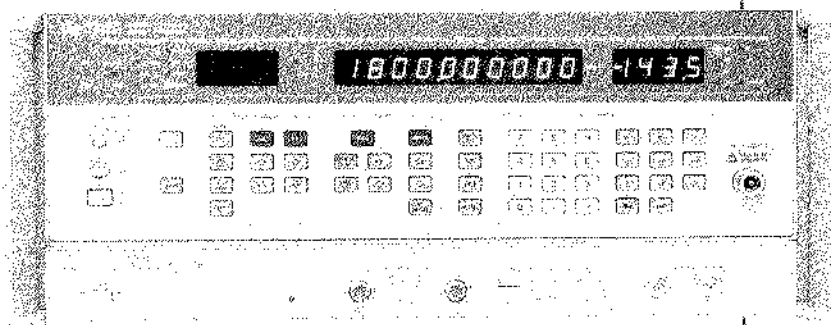

#### **HP 8657B Option 022**

- 100 kHz to 2060 MHz AM & FM
- 0.3 GMSK for GSM and PCN
  - 520 to 2060 MHz
  - 10 to 130 MHz data inverted
- Optional pulse modulation
- <3.5° rms phase error
- Baseband I/Q outputs

# HP 8656B

## specifications

SPECIFICATIONS describe the instruments warranted performance and apply after a 30 minute warm-up. All SPECIFICATIONS are valid over the signal generator's entire Operating/Environmental Range unless otherwise noted.

SUPPLEMENTAL CHARACTERISTICS (shown in *italics*) are intended to provide additional information useful in applying the instrument by giving typical (expected), but not warranted performance.

### FREQUENCY

**Range (8-digit LED display):** 100 kHz to 990 MHz.

**Resolution:** 10 Hz.

**Switching Speed (to be within 100 Hz of carrier frequency):** <35 ms. (25ms typical at 25°C)

**Accuracy and Stability:** Same as timebase used.

### SUPPLEMENTAL CHARACTERISTICS

**Frequency Underrange:** 10 kHz with uncalibrated output.

**Phase Offset:** Output phase is adjustable via HP-IB, or from the front panel in 1 degree increments.

**Timebase Characteristics:**

|                                               | Standard                                                                                                                                                                                                                                   | Option 001                                                                                                          |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Aging Rate</b>                             | $\pm 2$ ppm/year                                                                                                                                                                                                                           | $1.5 \times 10^{-8}$ / day<br>(after 10 days warm-up)<br>$1.0 \times 10^{-9}$ parts/day<br>(after 180 days warm-up) |
| <b>Temperature (0-55°C)</b>                   | $\pm 10$ ppm                                                                                                                                                                                                                               | $7 \times 10^{-9}$                                                                                                  |
| <b>Line Voltage</b>                           |                                                                                                                                                                                                                                            | $2 \times 10^{-9}$ (+5%, -10%)                                                                                      |
| <b>Frequency</b>                              | 50 MHz                                                                                                                                                                                                                                     | 10 MHz                                                                                                              |
| <b>Timebase Reference Signal (Rear Panel)</b> | Available at a level of $> 0.15 V_{rms}$ into 50 $\Omega$ (Output of 10, 5, or 1 MHz is selectable via internal jumper). If the Option 001 or another external reference is used, only that reference frequency is available as an output. |                                                                                                                     |
| <b>External Reference Input (Rear Panel)</b>  | Accepts any 10, 5, or 1 MHz ( $\pm 0.002\%$ ) frequency standard at a level $> 0.15 V_{rms}$ into 50 $\Omega$                                                                                                                              |                                                                                                                     |

### SPECTRAL PURITY

**Spurious Signals ( $\leq +7$  dBm output levels):**

**Harmonic:**  $< -30$  dBc

**Sub-harmonic:** None.

**Non-Harmonic:**  $< -60$  dBc ( $> 5$  kHz from carrier in CW mode)

**Residual FM (in CW mode):**


| Frequency Range | Post Detection BW (rms detector) |                 |
|-----------------|----------------------------------|-----------------|
|                 | 300 Hz to 3 kHz                  | 50 Hz to 15 kHz |
| 0.1 - 123.5 MHz | $< 7$ Hz (typ $< 2$ Hz)          | $< 15$ Hz       |
| 123.5 - 247 MHz | $< 2$ Hz (typ $< 0.5$ Hz)        | $< 4$ Hz        |
| 247 - 494 MHz   | $< 4$ Hz (typ $< 1$ Hz)          | $< 8$ Hz        |
| 494 - 990 MHz   | $< 7$ Hz (typ $< 1$ Hz)          | $< 15$ Hz       |

**Residual AM (50 Hz to 15 kHz post-detection noise bandwidth, in CW mode):**  $< 0.02\%$  AM SSB  
**Phase Noise (in CW Mode):**

| Carrier Frequency | SSB $\phi$ -Noise 20 kHz offset |
|-------------------|---------------------------------|
| 0.1 to 123.5 MHz  | $< -114$ dBc/Hz                 |
| 123.5 to 247 MHz  | $< -126$ dBc/Hz                 |
| 247 to 494 MHz    | $< -120$ dBc/Hz                 |
| 494 to 990 MHz    | $< -114$ dBc/Hz                 |

### SUPPLEMENTAL CHARACTERISTICS

**Typical SSB Phase Noise at 500 MHz**

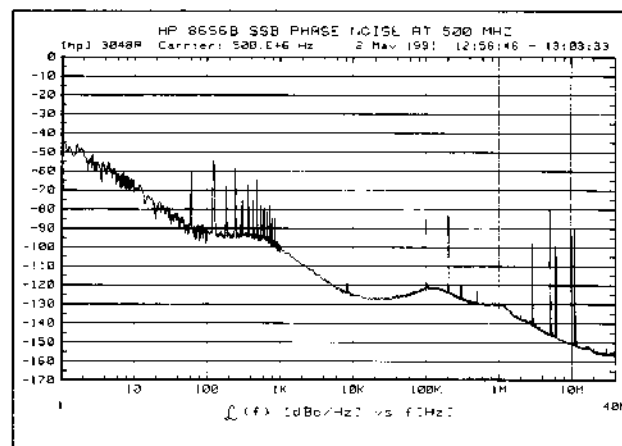

## OUTPUT

**Level Range** (3 1/2-digit LED display): +13 dBm to -127 dBm into 50Ω.

**Resolution:** 0.1 dB.

**Absolute Level Accuracy:**<sup>1-PS</sup>

< ±1.0 dB (123.5 to 990 MHz, +7 to -124 dBm),  
< ±1.5 dB (0.1 to 123.5 MHz, and <-124 dBm  
or > +7 dBm at 0.1 to 990 MHz).

**Level Flatness (100 kHz to 990 MHz):** ≤ 1.0 dB,  
output level setting of 0 dBm.

**SWR:** < 2.0 for levels > -5 dBm.


< 1.5 for levels ≤ -5 dBm.

**Reverse-Power Protection:** Protects the signal generator from applications of up to 25 watts of RF power (from a 50Ω source) to 990 MHz into generator output; DC voltage cannot exceed 25 V.

## SUPPLEMENTAL CHARACTERISTICS

**Impedance:** 50 Ω Nominal.

**Typical Output Level Overrange:**

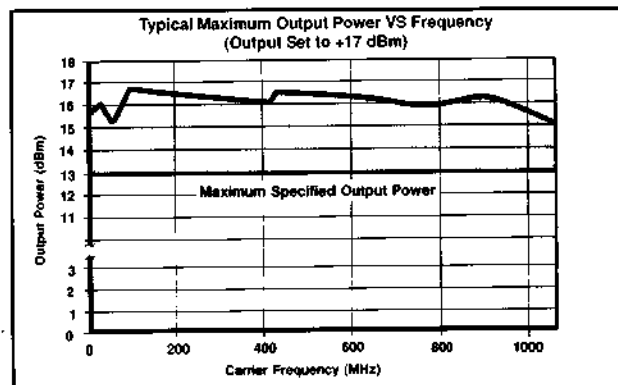

## AMPLITUDE MODULATION

**AM Depth**(2-digit LED display):<sup>2-PS</sup>

0 to 99%, levels of < +7 dBm  
0 to 30%, levels to < +10 dBm

**Resolution:** 1%.

**AM Rate,**

**Internal:** 400 Hz and 1 kHz, ± 3%.

**External:** 20 Hz to 40 kHz (1 dB bandwidth,  
AC coupled)

**AM Distortion (internal rates):**

0 to 30 % AM < 1.5%.  
31 to 70 % AM < 3.0%.  
71 to 90 % AM < 4.0%.

**Indicator Accuracy (for depths < 90%, and  
internal rates and levels < +7 dBm)**<sup>2-PS</sup>:

< ± (2% ±4% of setting).

**Incidental Phase Modulation (at 30% AM depth,  
internal rates):** < 0.3 radians peak.

## FREQUENCY MODULATION

**Maximum FM Peak Deviation ( $\Delta f_{pk}$ ):**<sup>3-PS</sup>

| Center Frequency                                       | Maximum Peak Deviation     |         |
|--------------------------------------------------------|----------------------------|---------|
|                                                        | AC Mode (the lesser of)    | DC Mode |
| 0.1 to 123.5 MHz                                       | 99 kHz or 4000 x rate (Hz) | 99 kHz  |
| 123.5 to 247 MHz                                       | 50 kHz or 1000 x rate (Hz) | 50 kHz  |
| 247 to 494 MHz                                         | 99 kHz or 2000 x rate (Hz) | 99 kHz  |
| 494 to 990 MHz                                         | 99 kHz or 4000 x rate (Hz) | 99 kHz  |
| FM not specified for $f_c - (\Delta f_{pk}) < 100$ kHz |                            |         |

**Resolution:** 100 Hz for deviations less than 10 kHz;  
1 kHz for deviations ≥ 10 kHz.

**FM Rate,**

**Internal:** 400 Hz and 1 kHz, ±3%.

**External:** dc/5 kHz, to 100 kHz, 3 dB bandwidth  
dc/20 Hz to 50 kHz, 1 dB bandwidth

**Center Frequency Accuracy in dc Mode:**

| Carrier Frequency | Center Frequency Accuracy |
|-------------------|---------------------------|
| 0.1 to 123.5 MHz  | ± 500 Hz                  |
| 123.5 to 247 MHz  | ± 125 Hz                  |
| 247 to 494 MHz    | ± 250 Hz                  |
| 494 to 990 MHz    | ± 500 Hz                  |

**Center Frequency Stability in dc Mode:**

<10 Hz per hour drift (typ < 3 Hz per hour).

**FM Distortion (at internal rates and ≥ 3 kHz peak  
deviations):**<sup>4-PS</sup>

< 0.5% THD plus noise

**Indicator Accuracy (internal rates):**<sup>3-PS</sup>

< ±5% of setting.

**Incidental AM (peak deviations <20 kHz, internal  
rates):** < 0.1% ( $f_c > 500$  kHz)

< 1% ( $f_c = 200$  to 500 kHz)

< 5% ( $f_c < 200$  kHz)

## SUPPLEMENTAL CHARACTERISTICS

**External Sensitivity:** 1 volt peak for indicated  
accuracy for ac signals or 1 volt dc when in dc-FM  
mode.

**External Modulation Input:** Front panel BNC,  
600Ω dc-coupled; front panel annunciators  
indicate application of 1 V peak signal ± 5%.

**Modulating Signal Output:** Internal modulating  
signal is provided at the front panel BNC connector  
at nominally 1 volt peak into a 600 Ω resistive  
load.

**Simultaneous Modulation:**

**Internal/External:** AM/FM, FM/AM, AM/AM,  
FM/FM,

**Internal/Internal, External/External:** AM/FM.

# HP 8656B

## specifications

### REMOTE PROGRAMMING

**Interface:** HP-IB (Hewlett-Packard's implementation of IEEE Standard 488 (and the identical ANSI Standard MC1.1).

**Interface Functions Implemented:** SH0, AH1, T0, L2, SR0, RL1, PP0, DC1, DT0, C0, E1.

**Functions Controlled:** All functions controlled from the front panel with the exception of DISPLAY, DISPLAY in conjunction with SEQ, display Amplitude Offset, Backspace, COARSE TUNE, FINE TUNE, and display HP-IB ADRS are programmable with the same accuracy and resolution as in local operation.

### GENERAL

**Operating Temperature Range:** 0 to +55°C.

**Storage Temperature Range:** -40 to +71°C.

**Leakage:** Conducted and radiated interference is within the requirements of RE02 of MIL STD 461B and FTZ 1115. Furthermore, RF leakage of less than 1.0  $\mu$ V is induced in a two-turn loop, 2.5 cm in diameter, held 2.5 cm away from the front surface.

**Save/Recall/Sequence Storage Registers:**


100 non-volatile registers are available to save front panel settings.

**Power Requirements:** 100 or 120 or 220 or 240 volts (+5%, -10%) from 48 to 440 Hz; 125 VA maximum.

**Weight:** Net 18.1 kg (40 lb); shipping 23.6 kg (52 lb).

**Dimensions:** 133H x 425W x 520D mm  
(5.25 x 16.75 x 20.5 inches.)

**HP System II module size:** 5 1/4H x 1MW x 17 D.

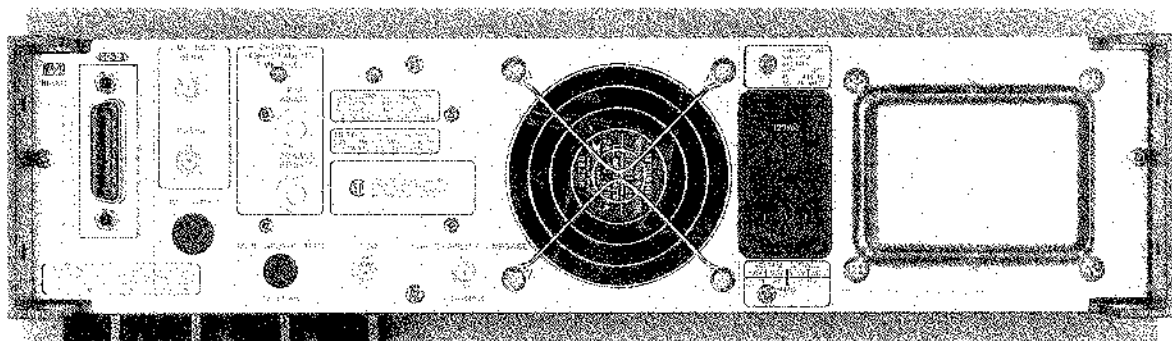

<sup>1</sup> Absolute level accuracy includes allowances for detector linearity, temperature, flatness, attenuator accuracy and measurement uncertainty.

<sup>2</sup> AM depth is further limited by Indicator Accuracy specification.

<sup>3</sup> FM depth is further limited by Indicator Accuracy specifications.

<sup>4</sup> FM distortion only applies for deviations up to 25 kHz for  $123.5 < f_c < 247$  MHz, and 50 kHz for  $247 < f_c < 494$  MHz. Typical total FM distortion (harmonic and non-harmonic) is less than 1.5% for all specified deviations and external rates from dc to 100 kHz.

<sup>5</sup> Typically < 0.5% THD for peak deviations > 1 kHz and at normal rates.

# HP 8657A

## specifications

SPECIFICATIONS describe the instruments warranted performance and apply after a 30 minute warm-up. All SPECIFICATIONS are valid over the signal generator's entire Operating/Environmental Range unless otherwise noted.

SUPPLEMENTAL CHARACTERISTICS (shown in italics) are intended to provide additional information useful in applying the instrument by giving typical (expected), but not warranted performance.

### FREQUENCY

**Range (8-digit LED display):** 100 kHz to 1040 MHz.

**Resolution:** 10 Hz.

**Display Resolution:**

10 Hz for frequencies < 1000 MHz

100 Hz for frequencies ≥ 1000 MHz

**Switching Speed (to be within 100 Hz of carrier frequency):** <35 ms. (30 ms typical at 25°C)

**Accuracy and Stability:** Same as time base used.

### SUPPLEMENTAL CHARACTERISTICS

**Frequency Underrange:** To 10 kHz with uncalibrated output and modulation.

**Phase Offset:** Output signal phase is adjustable in 1 degree nominal increments.

**Timebase Characteristics:**

|                                               | Standard                                                                                                                                                                                  | Option 001                                                                                                            |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>Aging Rate</b>                             | ±2 ppm/year                                                                                                                                                                               | 1.5 x 10 <sup>-9</sup> parts/day (after 10 days warm-up)<br>1.0 x 10 <sup>-9</sup> parts/day (after 180 days warm-up) |
| <b>Temperature (0-55°C)</b>                   | ±10 ppm                                                                                                                                                                                   | 7 x 10 <sup>-9</sup>                                                                                                  |
| <b>Line Voltage</b>                           | —                                                                                                                                                                                         | 2 x 10 <sup>-9</sup> (+5%, -10%)                                                                                      |
| <b>Frequency</b>                              | 50 MHz                                                                                                                                                                                    | 10 MHz                                                                                                                |
| <b>Timebase Reference Signal (Rear Panel)</b> | Available at a level of >0.15 V <sub>rms</sub> into 50 Ω (Output of 10, 5, or 1 MHz is selectable via internal jumper). If external reference is used, output will be the same frequency. |                                                                                                                       |
| <b>External Reference Input (Rear Panel)</b>  | Accepts any 10, 5, or 1 MHz (±0.002%) frequency standard at a level >0.15 V <sub>rms</sub> into 50 Ω.                                                                                     |                                                                                                                       |

### SPECTRAL PURITY

**Spurious Signals** (≤+7 dBm output levels):

**Harmonic:** <- 30 dBc.

**Sub-harmonic:** None.

**Non-Harmonic (CW mode):**

| Frequency Range | Offset from Carrier |          |
|-----------------|---------------------|----------|
|                 | 5 kHz to 2 MHz      | > 2 MHz  |
| 0.1 - 130 MHz   | <-60 dBc            | <-60 dBc |
| 130 - 260 MHz   | <-72 dBc            | <-60 dBc |
| 260 - 520 MHz   | <-66 dBc            | <-60 dBc |
| 520 - 1040 MHz  | <-60 dBc            | <-60 dBc |

**Residual FM (in CW mode):**

| Frequency Range | Post Detection BW (rms detector) |                 |
|-----------------|----------------------------------|-----------------|
|                 | 300 Hz to 3kHz                   | 50 Hz to 15 kHz |
| 0.1 - 130 MHz   | < 4 Hz (typ < 2 Hz)              | < 6 Hz          |
| 130 - 260 MHz   | < 1 Hz (typ < 0.5 Hz)            | < 1.5 Hz        |
| 260 - 520 MHz   | < 2 Hz (typ < 1 Hz)              | < 3 Hz          |
| 520 - 1040 MHz  | < 4 Hz (typ < 1 Hz)              | < 6 Hz          |


**Residual AM (50 Hz to 15 kHz post-detection noise bandwidth, in CW mode):** <0.04% AM.

**SSB Phase Noise (in CW Mode):**

| Carrier Frequency | SSB $\phi$ -Noise 20 kHz offset |
|-------------------|---------------------------------|
| 0.1 to 130 MHz    | < -124 dBc/Hz                   |
| 130 to 260 MHz    | < -136 dBc/Hz                   |
| 260 to 520 MHz    | < -130 dBc/Hz                   |
| 520 to 1040 MHz   | < -124 dBc/Hz                   |

### SUPPLEMENTAL CHARACTERISTICS

**Typical SSB Phase Noise at 500 MHz**

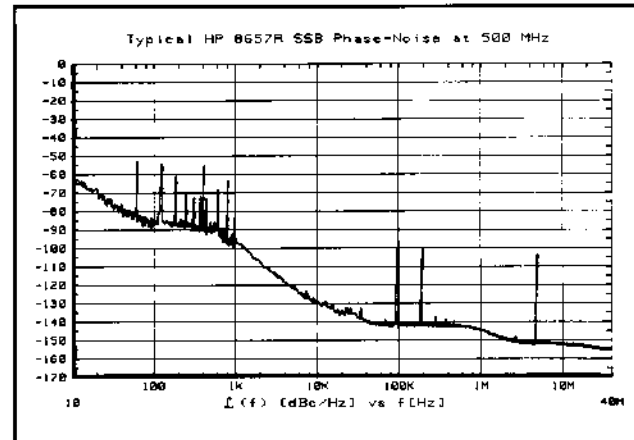

# HP 8657A

## specifications

### OUTPUT

**Level Range** (3 1/2-digit LED display): +13 dBm to -143.5 dBm into 50Ω, +10 dBm to -143.5 dBm for frequencies from 100 kHz to 1 MHz.

**Resolution:** 0.1 dB.

**Absolute Level Accuracy:**<sup>1-peg</sup>

< ±1.0 dB (+7 to -127 dBm),

< ±1.5 dB (>+7 dBm).

**Level Flatness** (100 kHz to 1040 MHz): ±0.5 dB, output level setting of 0 dBm.

**SWR** ( $f_c \geq 400$  kHz): <1.5 for levels <- 3.5 dBm. <2.0 for levels ≤+13 dBm.

**Reverse-Power Protection:** Protects the signal generator from applications of up to 50 watts of RF power (from a 50Ω source) to 1040 MHz into generator output; DC voltage cannot exceed 50 V.

### SUPPLEMENTAL CHARACTERISTICS


**Impedance:** 50 Ω Nominal.

**Absolute level Accuracy:**

< ±1.5 dB, output levels <- 127 dBm.

< ± 0.5 dB, 25°C ±10°C, +7 to -127 dBm.

**Typical Output Level Overage:**

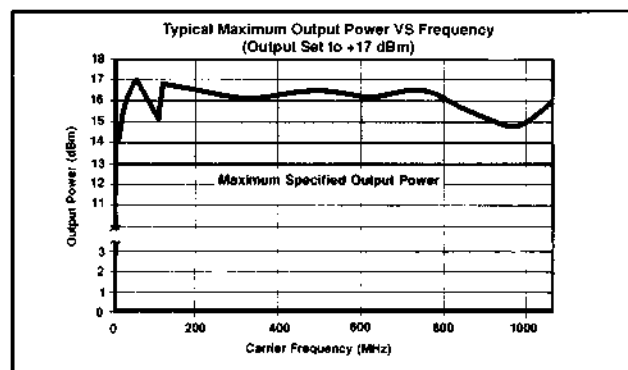

### AMPLITUDE MODULATION

**AM Depth** (2-digit LED display):<sup>2-peg</sup>

0 to 99%, level ≤ +7 dBm,  $f_c \geq 400$  kHz.<sup>3-peg</sup>

0 to 30%, level ≤ +10 dBm,  $f_c \geq 400$  kHz.<sup>3-peg</sup>

**Resolution:** 1%.

**AM Rate,**

**Internal:** 400 Hz and 1 kHz, ± 2%.

**External:** 20 Hz to 40 kHz

(1 dB bandwidth, AC coupled)

**AM Distortion** (internal rates, level < +7 dBm):

0 to 30 % AM < 1.5% THD plus noise.

31 to 70 % AM < 3.0% THD plus noise.

71 to 90 % AM < 4.0% THD plus noise.

**Indicator Accuracy** (for depths < 90% and internal rates and levels < +7 dBm):

< ±(2% +6% of setting).

**Incidental Phase Modulation** (at 30% AM depth, internal rates): < 0.3 radians peak.

### FREQUENCY MODULATION

**Maximum FM Peak Deviation** (2-digit LED display):<sup>2-peg</sup>

| Center Frequency | Maximum Peak Deviation     |         |
|------------------|----------------------------|---------|
|                  | AC Mode (the lesser of)    | DC Mode |
| 0.1 to 130 MHz   | 99 kHz or 4000 x rate (Hz) | 99 kHz  |
| 130 to 260 MHz   | 50 kHz or 1000 x rate (Hz) | 50 kHz  |
| 260 to 520 MHz   | 99 kHz or 2000 x rate (Hz) | 99 kHz  |
| 520 to 1040 MHz  | 99 kHz or 4000 x rate (Hz) | 99 kHz  |

FM not specified for  $f_c - (\Delta f_{pk}) < 100$  kHz

**Resolution:** 100 Hz for deviations less than 10 kHz; 1 kHz for deviations ≥ 10 kHz.

**FM Rate,**

**Internal:** 400 Hz and 1 kHz, ±2%.

**External:**

dc/5 Hz to 100 kHz, 3 dB bandwidth

dc/20 Hz to 50 kHz, 1 dB bandwidth

**Center Frequency Accuracy in dc Mode:**

| Carrier Frequency | Center Frequency Accuracy |
|-------------------|---------------------------|
| 0.1 to 130 MHz    | ± 500 Hz                  |
| 130 to 260 MHz    | ± 125 Hz                  |
| 260 to 520 MHz    | ± 250 Hz                  |
| 520 to 1040 MHz   | ± 500 Hz                  |

**Center Frequency Stability in dc Mode:** <10 Hz per hour drift (typ <3 Hz per Hour).

**FM Distortion** (at internal rates and ≥ 3 kHz peak deviations):<sup>4-peg</sup> <0.5% THD plus noise.

**Indicator Accuracy** (internal rates):

< ±5% of setting.

**Incidental AM** (peak deviations <20 kHz, internal rates and  $f_c \geq 500$  kHz): <0.1% AM

## SUPPLEMENTAL CHARACTERISTICS

**External Sensitivity:** 1 volt peak for indicated accuracy (1 volt dc when in dc-FM mode).

**External Modulation Input:** Front panel BNC, 600  $\Omega$  dc-coupled; front panel annunciators indicate application of 1 V peak signal  $\pm$  5%.

**Modulating Signal Output:** Internal modulating signal is provided at the front panel BNC connector at nominally 1 volt peak into a 600  $\Omega$  resistive load.

**Simultaneous Modulation:**

Internal/External: AM/FM, FM/AM, AM/AM, FM/FM

Internal/Internal, External/External: AM/FM.

## REMOTE PROGRAMMING

**Interface:** HP-IB (Hewlett-Packard's implementation of IEEE Standard 488).

**Interface Functions Implemented:** SH0, AH1, T0, L2, SR0, RL1, PP0, DC1, DT0, C0, E1.

## GENERAL

**Operating Temperature Range:** 0 to +55°C.

**Storage Temperature Range:** -40 to +71°C.

**Leakage:** Conducted and radiated interference is within the requirements of RE02 of MIL STD 461B and FTZ 1046. Furthermore, RF leakage of less than 1.0  $\mu$ V is induced in a two-turn loop, 2.5 cm in diameter, held 2.5 cm away from the front surface.

**Save/Recall/Sequence Storage Registers:**


100 non-volatile registers are available to save front panel settings.

**Power Requirements:** 100 or 120 or 220 or 240 volts (+5%, -10%) from 48 to 440 Hz; 175 VA maximum.

**Weight:** Net 18.2 kg (40 lb); shipping 23.6 kg (52 lb).

**Dimensions:** 133H x 425W x 520D mm (5.25 x 16.75 x 20.5 inches.)

**HP System II module size:** 5 1/4H x 1MW x 17 D.

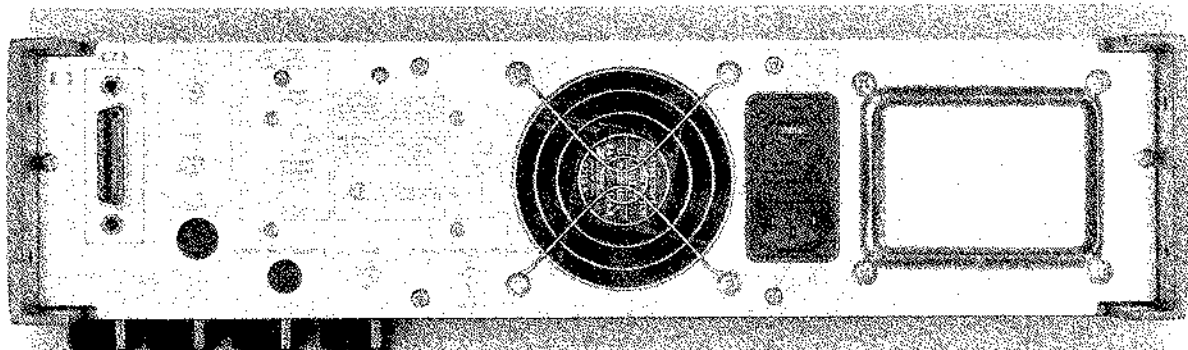

<sup>1</sup> Absolute level accuracy includes allowances for detector linearity, temperature, flatness, attenuator accuracy and measurement uncertainty.

<sup>2</sup> AM depth and FM deviation are further limited by Indicator Accuracy specifications.

<sup>3</sup> For  $f_c < 400$  kHz, AM depths of 0 to 30%, levels  $\leq +7$  dBm.

<sup>4</sup> FM distortion only specified for deviations up to 25 kHz for  $130 < f_c < 260$  MHz, and for  $260 < f_c < 520$  MHz. Typical total FM dist (harmonic and non-harmonic) is less than 1.5% for all deviations and rates from dc to 100 kHz.

# HP 8657B

## specifications

SPECIFICATIONS describe the instruments warranted performance and apply after a 30 minute warm-up. All SPECIFICATIONS are valid over the signal generator's entire Operating/Environmental Range unless otherwise noted.

SUPPLEMENTAL CHARACTERISTICS (shown in italics) are intended to provide additional information useful in applying the instrument by giving typical (expected), but not warranted performance.

### FREQUENCY

**Range (10-digit LED display):**

100 kHz to 2060 MHz.

**Resolution:** 1 Hz.

**Switching Speed (to be within 1 dB of level and within 100 Hz of carrier frequency):**

<35 ms.<sup>7-pg12</sup> (30 ms typical at 25°C)

**Accuracy and Stability:** Same as timebase used.

### SUPPLEMENTAL CHARACTERISTICS

**Frequency Underrange:** To 10 kHz with uncalibrated output and modulation.

**Phase Offset:** Output signal phase is adjustable in 1 degree increments.

**Timebase Characteristics:**

|                                        | Standard                                                                                                                                                                                     | Option 001                                |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| Aging Rate                             | ±2 ppm/year                                                                                                                                                                                  | 1.0 x 10 <sup>-9</sup> /day after 45 days |
| Temperature (0-55°C)                   | ±10 ppm                                                                                                                                                                                      | 7 x 10 <sup>-9</sup>                      |
| Line Voltage                           | —                                                                                                                                                                                            | 2 x 10 <sup>-9</sup> (+5%, -10%)          |
| Frequency                              | 50 MHz                                                                                                                                                                                       | 10 MHz                                    |
| Timebase Reference Signal (Rear Panel) | Available at a level of >0.15 V <sub>rms</sub> into 50 Ω (Output of 10, 5, or 1 MHz is selectable via internal jumper). If an external reference is used, output will be the same frequency. |                                           |
| External Reference Input (Rear Panel)  | Accepts any 10, 5, or 1 MHz (±0.002%) frequency standard at a level >0.15 V <sub>rms</sub> into 50 Ω.                                                                                        |                                           |

### SPECTRAL PURITY

**Spurious Signals (≤+7 dBm output levels):**<sup>1-pg12</sup>

| Type of Spurious | Frequency (MHz) |           |           |
|------------------|-----------------|-----------|-----------|
|                  | 0.1-1030        | 1030-1800 | 1800-2060 |
| Harmonic         | <- 30 dBc       | <- 25 dBc | <- 25 dBc |
| Sub-harmonic     | None            | <- 40 dBc | <- 35 dBc |

### Nonharmonic Spurious:

| Carrier Frequency | Carrier Offset   |           |
|-------------------|------------------|-----------|
|                   | >5 kHz (Typical) | >2 MHz    |
| 0.1 to 130        | <- 63 dBc        | <- 60 dBc |
| 130 to 260        | <- 75 dBc        | <- 60 dBc |
| 260 to 520        | <- 66 dBc        | <- 60 dBc |
| 520 to 1030       | <- 63 dBc        | <- 60 dBc |
| 1030 to 2060      | <- 57 dBc        | <- 54 dBc |

### Residual FM in Hz rms (in CW mode):

| Post Detection Bandwidth | Frequency Range (MHz) |          |          |          |           |
|--------------------------|-----------------------|----------|----------|----------|-----------|
|                          | 0.1-130               | 130-260  | 260-520  | 520-1040 | 1040-2060 |
| 0.3 - 3 kHz              | <4 Hz                 | <1 Hz    | <2 Hz    | <3 Hz    | <6 Hz     |
| 0.05 - 15 kHz            | <6 Hz                 | <1.5 Hz  | <3 Hz    | <4 Hz    | <8 Hz     |
| Typical Residual FM:     |                       |          |          |          |           |
| 0.3 - 3 kHz              | <2 Hz                 | <0.5 Hz  | <0.5 Hz  | <1 Hz    | <2 Hz     |
| 0.3 - 3 kHz (CCITT)      | <1.25 Hz              | <0.25 Hz | <0.25 Hz | <0.5 Hz  | <1.0 Hz   |
| 0.05 - 15 kHz            | <3 Hz                 | <1 Hz    | <1 Hz    | <1.5 Hz  | <3 Hz     |


**Residual AM (50 Hz to 15 kHz post-detection noise bandwidth, in CW mode):** <0.04% AM.

**SSB Phase Noise (in CW Mode):**

| Carrier Frequency | SSB $\phi$ -Noise 20 kHz offset | Typical 20 kHz offset |
|-------------------|---------------------------------|-----------------------|
| 0.1 to 130 MHz    | <- 124 dBc/Hz                   | <- 130 dBc/Hz         |
| 130 to 260 MHz    | <- 136 dBc/Hz                   | <- 140 dBc/Hz         |
| 260 to 520 MHz    | <- 130 dBc/Hz                   | <- 136 dBc/Hz         |
| 520 to 1040 MHz   | <- 124 dBc/Hz                   | <- 130 dBc/Hz         |
| 1040 to 2060 MHz  | <- 118 dBc/Hz                   | <- 123 dBc/Hz         |

### SUPPLEMENTAL CHARACTERISTICS

**Typical SSB Phase Noise at 500 MHz**

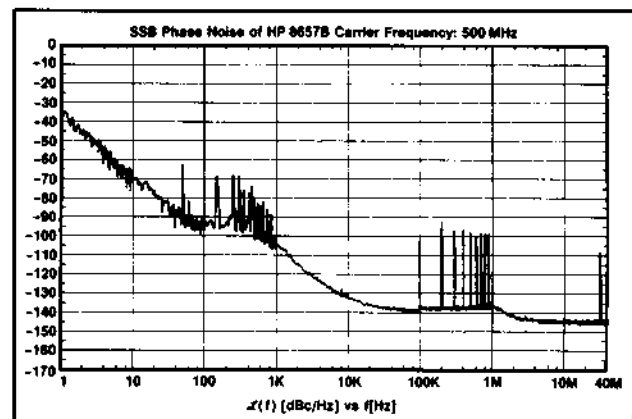

## OUTPUT

**Level Range** (3 1/2-digit LED display): +13 dBm  
to -143.5 dBm into 50Ω, <sup>2-pp12</sup>

**Resolution:** 0.1 dB.

**Absolute Level Accuracy:** <sup>3-pp12</sup>

< ±1.0 dB (+3.5 to -127 dBm),

< ±1.5 dB (level > +3.5 dBm).

**Level Flatness** (100 kHz to 2060 MHz):

±0.5 dB, output level setting of 0 dBm.

**Reverse-Power Protection:** Protects the signal generator from applications of up to 50 watts of RF power (from a 50Ω source) to 2060 MHz into generator output; DC voltage cannot exceed 25 V.

## SUPPLEMENTAL CHARACTERISTICS

**Attenuator Repeatability:** 0.01 dB


**Impedance:** 50 Ω Nominal.

**Absolute level Accuracy:** 1.5 dB, output levels  
≤ -127 dBm.

**SWR:** <1.5 for levels ≤ -6.5 dBm.

<2.0 for levels ≤ +13 dBm.

**Typical Output Level Overrange:**

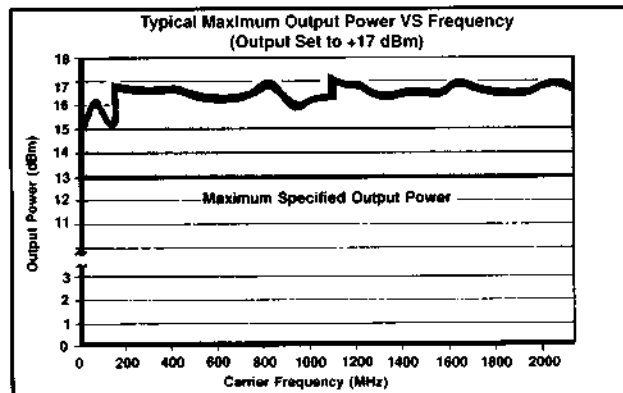

## AMPLITUDE MODULATION

**AM Depth** ( $f_c > 400$  kHz): <sup>4-pp12</sup>

0 to 100%, level ≤ +7 dBm.

0 to 30%, level ≤ +10 dBm.

**Resolution:** 1%.

**AM Rate,**

**Internal:** 400 Hz and 1 kHz, ± 2%.

**External:** 20 Hz to 40 kHz (1 dB bandwidth)

20 Hz to 100 kHz (3 dB bandwidth) Typical.

**AM Distortion** (at 400 Hz and 1 kHz rates, levels  
≤ +7 dBm):

| AM Depth      | $f_c < 1030$ | $f_c > 1030$ |
|---------------|--------------|--------------|
| 0 to 30 % AM  | 1.5%         | 4%           |
| 31 to 70 % AM | 3.0%         | 4%           |
| 71 to 90 % AM | 4.0%         | 7%           |

**Indicator Accuracy** (for depths < 90%, 400 Hz  
and 1 kHz rates and levels ≤ +7 dBm):

±(2% + 6% of setting).

**Incidental Phase Modulation** (at 30% AM depth,  
internal rates): < 0.3 radians peak.

## FREQUENCY MODULATION

**Maximum FM Peak Deviation:**

| Center Frequency | Maximum Peak Deviation      |         |
|------------------|-----------------------------|---------|
|                  | AC Mode<br>(the lesser of)  | DC Mode |
| 0.1 to 130 MHz   | 200 kHz or 4000 x rate (Hz) | 200 kHz |
| 130 to 260 MHz   | 50 kHz or 1000 x rate (Hz)  | 50 kHz  |
| 260 to 520 MHz   | 100 kHz or 2000 x rate (Hz) | 100 kHz |
| 520 to 1040 MHz  | 200 kHz or 4000 x rate (Hz) | 200 kHz |
| 1040 to 2060 MHz | 400 kHz or 8000 x rate (Hz) | 400 kHz |

FM not specified when peak deviation is > ( $f_c$  -100 KHz)

**FM Setting Resolution:**

| FM Deviation | Carrier Frequency |                  |
|--------------|-------------------|------------------|
|              | $f_c < 1040$ MHz  | $f_c > 1040$ MHz |
| < 20 kHz     | 100 Hz            | 200 Hz           |
| > 20kHz      | 200 Hz            | 400 Hz           |

**FM Rate,**

**Internal:** 400 Hz and 1 kHz, ±2%.

**External:** (referenced to 1 kHz)

dc/5 Hz to 100 kHz, 3 dB bandwidth.

dc/20 Hz to 50 kHz, 1 dB bandwidth.

**Center Frequency Accuracy in dc Mode:**

| Carrier Frequency | Center Frequency Accuracy |
|-------------------|---------------------------|
| 0.1 to 130 MHz    | ± 500 Hz                  |
| 130 to 260 MHz    | ± 125 Hz                  |
| 260 to 520 MHz    | ± 250 Hz                  |
| 520 to 1040 MHz   | ± 500 Hz                  |
| 1040 to 2060 MHz  | ± 1000 Hz                 |

**Center Frequency Stability in dc Mode:**

<10 Hz per hour drift (*typ* <3 Hz per hour).

**FM Distortion** (at 400 Hz and 1 kHz rates):

<0.5% THD plus noise at deviations shown in the  
following table.

| Center Frequency | Deviation    |
|------------------|--------------|
| 0.1 to 130 MHz   | 3 to 100 kHz |
| 130 to 260 MHz   | 3 to 25 kHz  |
| 260 to 520 MHz   | 3 to 50 kHz  |
| 520 to 1040 MHz  | 3 to 100 kHz |
| 1040 to 2060 MHz | 6 to 200 kHz |

# HP 8657B

## specifications

**Indicator Accuracy (400 Hz and 1 kHz rates):**  
< 5% of setting

**Incidental AM (peak dev. <20 kHz, 400 Hz and 1 kHz rates):** <0.5% AM  $f_c > 1030$  MHz  
< 0.1% AM,  $f_c > 500$  kHz.

### SUPPLEMENTAL CHARACTERISTICS

**FM Distortion:** Worst case distortion at all specified deviations, rates, and carrier frequencies is 1.5%.

**External Sensitivity:**

1 volt peak for indicated accuracy  
(1 volt dc when in dc-FM mode).

**External Modulation Input:**

Front panel BNC, 600  $\Omega$  dc-coupled; front panel annunciators indicate 1 V peak signal  $\pm 5\%$ .

**Modulating Signal Output:** Internal modulating signal is provided at the front panel BNC connector at nominally 1 volt peak into a 600  $\Omega$  resistive load.

**Simultaneous Modulation:**

Internal/External: AM/FM, FM/AM, AM/AM,  
FM/FM, AM/FM/Pulse. <sup>5-peg12</sup>

Internal/Internal, External/External: AM/FM

### PULSE MODULATION<sup>5-peg12</sup>

**ON/OFF Ratio:** >70 dB,  $f_c \geq 130$  MHz.

>95 dB,  $f_c \geq 1030$  MHz.

**Rise/Fall Time:** < 35 nanoseconds,  $f_c \geq 130$  MHz

< 50 nanoseconds,  $f_c \geq 1030$  MHz

### HP 8657B OPTION H60

If what you need is pulse modulation to 1 GHz and don't want to pay for 2 GHz coverage the HP 8657B Option H60 provides pulse modulation standard and frequency coverage from 100 kHz to 1040 MHz. All specifications are the same as the HP 8657B with Option 003, up to 1040 MHz.

### SUPPLEMENTAL CHARACTERISTICS:

**Typical Rise/Fall Time:** 10 ns,  $f_c < 1030$  MHz;

18 ns,  $f_c > 1030$  MHz.

**Maximum Repetition Rate:** DC - 30 MHz.

**Level Accuracy:**  $\pm 1.0$  dB absolute level accuracy in Pulse Mode.

**Duty Cycle:** 0 - 100% (limited by rise/fall time)

**Pulse Modulation Input:** BNC, high impedance (internally selectable to 50 ohms), can be driven directly by TTL.

**Maximum Input Level:**  $\pm 15$  V.

**Nominal Input Threshold:** 1.6 V.

**Video Feedthrough:** <15%.

**Pulse Time Delay:**<sup>6-peg12</sup>

Off to On: 47 nanoseconds

On to Off: 34 nanoseconds

### REMOTE PROGRAMMING

**Interface:** HP-IB (Hewlett-Packard's implementation of IEEE Standard 488).

**Interface Functions Implemented:** SH0, AH1, T0, L2, SR0, RL1, PP0, DC1, DT0, C0, E1.

### GENERAL

**Operating Temperature Range:** 0 to +55°C.

**Storage Temperature Range:** -40 to +71°C.

**Leakage:** Conducted and radiated interference is within the requirements of CE03 (except broadband conducted below 70 kHz) and RE02 of MIL STD 461B, and FTZ 1115. Furthermore, RF leakage of less than 1.0  $\mu$ V is induced in a two-turn loop, 2.5 cm in diameter, held 2.5 cm away from the front surface. (Typical leakage is <0.05  $\mu$ V for levels <-40 dBm.)

**Save/Recall/Sequence Storage Registers:**

100 non-volatile registers are available to save front panel settings.

**Rear Panel SEQ Input Level:** TTL low to recall next storage register contents.

**Power Requirements:** 100 or 120 or 220 or 240 volts ( $\pm 10\%$ ) from 48 to 440 Hz; 200 VA maximum.

**Weight:** Net 20.5 kg (45 lb); shipping 26.0 kg (57 lb).

**Dimensions:** 133H x 425W x 574D mm  
(5.25 x 16.75 x 22.6 inches.)

**HP System II module size:** 5 1/4H x 1MW x 17 D.

<sup>1</sup> Spurious specifications apply for output levels  $\leq +4$  dBm and  $f_c < 1030$  MHz when pulse modulation is installed.

<sup>2</sup> Maximum output power is +10 dBm with pulse modulation installed at  $f_c < 1030$  MHz.


<sup>3</sup> Absolute level accuracy includes allowances for detector linearity, temperature, flatness, attenuator accuracy and measurement uncertainty.

<sup>4</sup> When pulse modulation is installed, maximum specified output level in AM is reduced by 3 dB when  $f_c < 1030$  MHz.

<sup>5</sup> Pulse modulation specifications apply for carriers  $> 130$  MHz and levels  $\leq +7$  dBm (frequency switching speed typically increases by 30 ms with pulse modulation on). Additionally, AM is unspecified with pulse modulation turned on at  $f_c \geq 1030$  MHz.

<sup>6</sup> Time delay between a change in input pulse and carrier response.

<sup>7</sup> Add 5 ms when switching to  $f_c \geq 1030$  MHz.

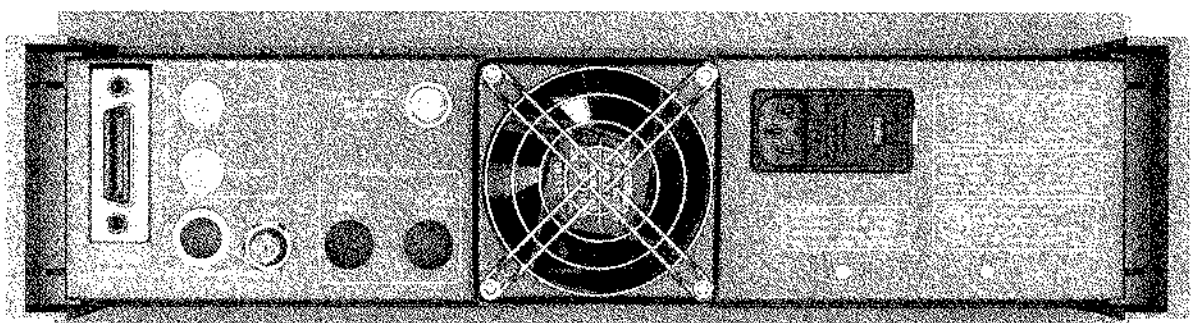

# HP 8657D

## specifications

SPECIFICATIONS describe the instruments warranted performance and apply after a 30 minute warm-up. All SPECIFICATIONS are valid over the signal generator's entire Operating/Environmental Range unless otherwise noted.

SUPPLEMENTAL CHARACTERISTICS (shown in italics) are intended to provide additional information useful in applying the instrument by giving typical (expected), but not warranted performance.

### Analog Modulation Mode

All specifications for the HP 8657D in analog mode are identical to those of the HP 8657B Signal Generator for frequencies from 100 kHz to 1030 MHz (overrange to 1040 MHz). Please refer to the HP 8657B specifications for complete HP 8657D analog mode specifications.

### $\pi/4$ DQPSK Digital Modulation Mode

#### FREQUENCY

**Range** (10-digit LED display):

10 MHz to 129.9 MHz.

810 MHz to 965 MHz.

1420 MHz to 1540 MHz data inverted.

**Resolution:** 1 Hz.

**Switching Speed** (to be within 100 Hz of final frequency): <35 ms. (does not apply when switching between frequency ranges listed above)

**Accuracy and Stability:** Same as timebase used.

#### SPECTRAL PURITY

#### SUPPLEMENTAL CHARACTERISTICS

**Harmonics:** Typically <-30 dBc.

**Nonharmonic Spurious:** Typically <-50 dBc.

**Residual FM (no data clock):**

Typically <6 Hz rms in a 300 Hz to 3 kHz BW.

**SSB Phase Noise (no data clock):**

Typically <-105 dBc/Hz at a 20 kHz offset.

#### OUTPUT

**Level Range:** -143.5 dBm minimum in all ranges.

+3 dBm maximum; 1420 to 1540 MHz

and 10 to 129.9 MHz.

+7 dBm maximum; 810 to 965 MHz.

**Resolution:** 0.1 dB.

**Level Accuracy:**  $\pm 1.0$  dB (-127 dBm to +3 dBm).

### $\pi/4$ DQPSK MODULATION

**Modulation Format:**  $\pi/4$  DQPSK.

**Data Rate,**

**Symbol Clock:** 20 kHz to 25 kHz.

**Bit Clock:** 40 kHz to 50 kHz.

**Pre-modulation Filter:** Square-root raised cosine.

**Filter Shape Factor:**  $\alpha = 0.35$  or  $\alpha = 0.50$ .

**Error Vector Magnitude (+15 to +35° C):**

<4%; 10 to 129.9 MHz and 1420 to 1540 MHz, level <+3 dBm.

<3.5%; 810 MHz to 965 MHz, level <+7 dBm.

**I/Q Origin Offset (+15 to +35° C):**

-35 dB (RF output only).

**Inputs:** Serial data and clock (bit or symbol).

**Outputs:** Baseband  $\pi/4$  DQPSK I and Q signals.

### SUPPLEMENTAL CHARACTERISTICS

**Input Levels:** Nominally TTL.

**Input Impedance:** Nominally 1 k $\Omega$ .

**Output Levels,**

**Symbol Clock:** Nominally TTL level.

**N  $\times$  Symbol Clock:** Nominally TTL level.

**128  $\times$  Symbol Clock:** Nominally TTL level.

**Baseband  $\pi/4$  DQPSK I and Q Output Level:**

Typically 0.35 volts into a 50  $\Omega$  load.

**Simultaneous Modulation:**  $\pi/4$  DQPSK and pulse

(AM and FM are not available in

$\pi/4$  DQPSK modulation mode).

### PULSE MODULATION

(standard on HP 8657D, pulse modulation is available in either the analog or  $\pi/4$  DQPSK modulation mode.)

**On/Off Ratio ( $\pi/4$  DQPSK mode):**

>70 dB;  $f_c \leq 1030$  MHz.

>50 dB;  $1420 \text{ MHz} \leq f_c \leq 1540 \text{ MHz}$

**Rise/Fall Time (10% to 90%):**

35 ns, typically 10 ns.

---

## GENERAL

**Remote Operation:** HP-IB. All functions but the line switch, sequence control, digital modulation polarity, and digital filter shape factor are remotely programmable.


**Operating Temperature Range:** 0 to +55°C.

**Storage Temperature Range:** -40 to 71°C.

**Power Requirements:** HP 8657D: 100 or 120 or 200 or 240 volts ( $\pm 10\%$ ) from 48 to 440 Hz; 200 VA maximum.  $\pi/4$  DQPSK modulator: 90 to 264 volts from 48 to 66 Hz; 75 VA maximum.

**Weight:** Net 26.4 kg (58 lb); shipping 37.3 kg (82 lb).

**Dimensions:** 223H  $\times$  425W  $\times$  575 mm  
(8.75  $\times$  16.8  $\times$  22.6 inches).

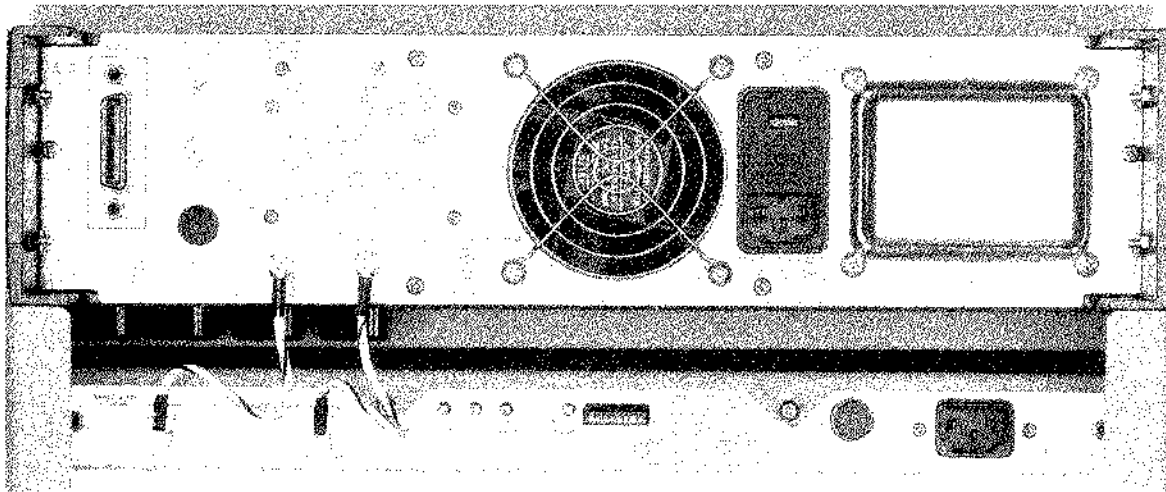

# HP 8657A/B Option 022

## specifications

SPECIFICATIONS describe the instruments warranted performance and apply after a 30 minute warm-up. All SPECIFICATIONS are valid over the signal generator's entire Operating/Environmental Range unless otherwise noted.

SUPPLEMENTAL CHARACTERISTICS (shown in *italics*) are intended to provide additional information useful in applying the instrument by giving typical (expected), but not warranted performance.

### Analog Modulation Mode

When the 0.3 GMSK modulator is turned off or a clock signal is absent, these instruments perform as standard HP 8657As or HP 8657Bs. Please refer to the HP 8657A or HP 8657B specifications for complete analog mode performance.

### 0.3 GMSK Digital Modulation Mode

#### FREQUENCY

##### Range:

Data Normal:

HP 8657A: 520 MHz to 1040 MHz.

HP 8657B: 520 MHz to 2060 MHz.

Data Inverted: 10 MHz to 130 MHz.

#### SPECTRAL PURITY

**Harmonics:** <-30 dBc.

<-25 dBc;  $f_c \geq 1030$  MHz (HP 8657B only).

**Nonharmonic Spurious (>150 kHz offsets):**

<-50 dBc.

**Noise Floor:** <-100 dBc.

### 0.3 GMSK MODULATION

**Modulation Format:** 0.3 GMSK

**Pre-modulation Filter:** Gaussian LPF

**Bandwidth x Data Rate (BT):** 0.3

**Data Rate:** 270.833 kHz ( $\pm 1$  kHz).

**Modulation Phase Error**

890 to 960 MHz and 10 to 130 MHz:

3° rms, *typically* 1°.

8° peak, *typically* 5°.

1030 to 2060 MHz (HP 8657B only):

3.5° rms, *typically* 1.5°.

9° peak, *typically* 6°.

**Frequency Error:** 10 Hz;  $f_c < 1030$ .

20 Hz;  $f_c \geq 1030$  MHz (HP 8657B only).

**Inputs:** Serial data and clock.

**Outputs (HP 8657B only):** Baseband 0.3 GMSK  
I and Q signals.

### SUPPLEMENTAL CHARACTERISTICS

##### Inputs:

*Data:* TTL high represents a "1".

*Clock:* Data accepted on rising edge.

**Input Levels:** Nominally TTL.

**Input Impedance:** Nominally 1 k $\Omega$

**Time to output modulation after clock input:**

25 microseconds.


**Time to cease modulation after clock**

**discontinued:** 35 microseconds.

**Baseband 0.3 GMSK I and Q Output Level:**

*Typically* 5 volts into a 50 $\Omega$  load.

**Simultaneous Modulation:** AM/FM/pulse/0.3  
GMSK.

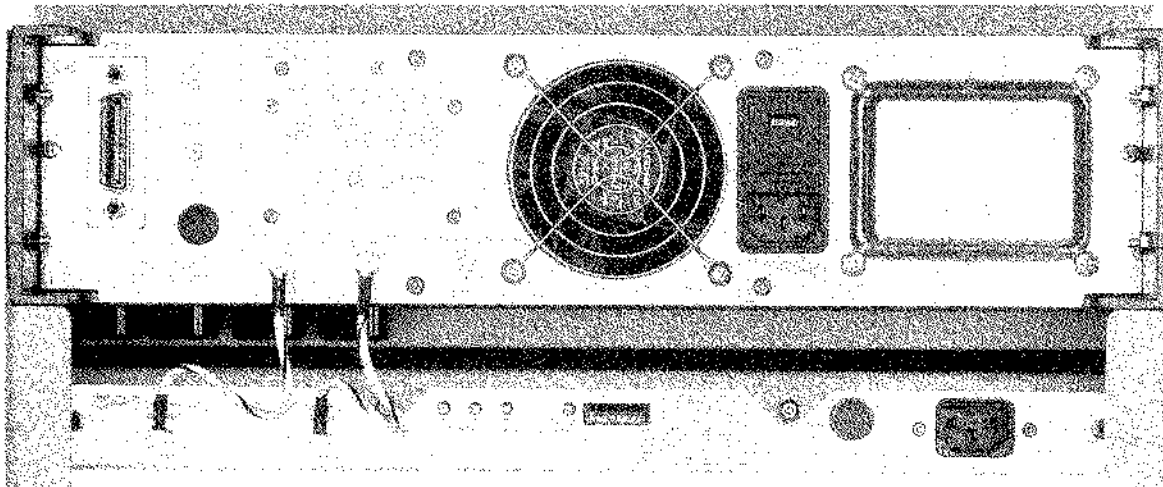

## GENERAL

---

**Remote Operation:** HP-IB. All functions but the line switch, sequence control, >1040 MHz 0.3 GMSK modulator switch (HP 8657B Option 022 only), and modulation data polarity are remotely programmable.

**Operating Temperature Range:** +15 to +35°C.


**Storage Temperature Range:** -40 to +71°C.

**Power Requirements (0.3 GMSK modulator only):**

90 to 264 volts from 48 to 66 Hz; 75 VA maximum.

**Weight (0.3 GMSK modulator only):** Net 4 kg (9 lb); shipping 9 kg (20 lb).

**Dimensions (0.3 GMSK modulator only):** 44H X 425W X 422D mm (1.75 X 16.75 X 17 inches).

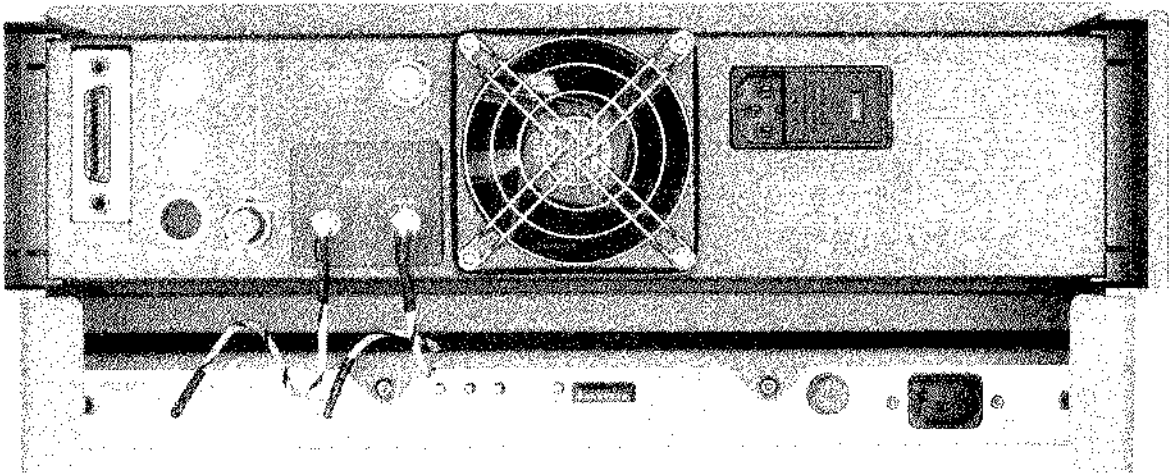

**HP 8657B Option 022**

# HP 8656B, 57A/B/D

## specification

### ORDERING INFORMATION

| Option                                                                          | HP 8656B | HP 8657A | HP 8657B | HP 8657D |
|---------------------------------------------------------------------------------|----------|----------|----------|----------|
| Standard Instrument                                                             | X        | X        | X        | X        |
| 001 High Stability Timebase                                                     | X        | X        | X        | X        |
| 002 Rear Panel Input/Outputs (N/A with Option 022)                              | X        | X        | X        | N/A      |
| 003 Pulse Modulation                                                            | N/A      | N/A      | X        | Standard |
| 022 0.3 GMSK Modulation (Includes Option 909, N/A with Option 002)              | N/A      | X        | X        | N/A      |
| 907 Front Handle Kit                                                            | X        | X        | X        | Standard |
| 908 Rack Flange Kit                                                             | X        | X        | X        | N/A      |
| 909 Rack Flange Kit w/Handles                                                   | X        | X        | X        | N/A      |
| 913 HP 8657D Rack Flange Kit                                                    | N/A      | N/A      | N/A      | X        |
| 910 Provides an additional Operation/Calibration Manual and two Service Manuals | X        | X        | X        | X        |
| 915 Add Service Manual                                                          | X        | X        | X        | X        |
| H60 HP 8657B upper frequency to 1040 MHz, pulse standard                        | N/A      | N/A      | X        | N/A      |
| +W30 3-year Repair service                                                      | X        | X        | X        | X        |
| +W32 3-year Calibration service                                                 | X        | X        | X        | X        |

N/A means NOT Available

X means Available

## ACCESSORIES

### Retrofit Kits:

To order standard options after shipment, order the following HP part numbers or special option numbers: (Note: These retrofit kits should only be installed by trained service professionals.)

| Option           | HP 8656B    | HP 8657A         | HP 8657B                | HP 8657D    |
|------------------|-------------|------------------|-------------------------|-------------|
| 001              | 08656-60195 | 08656-60195      | 08657-61054             | 08657-61054 |
| 002 <sup>1</sup> | Option K16  | 08657-61037      | 08657-61055             | N/A         |
| 003 <sup>2</sup> | N/A         | N/A              | Option G03 <sup>2</sup> | N/A         |
| 022 <sup>3</sup> | N/A         | N/A <sup>3</sup> | N/A <sup>3</sup>        | N/A         |

<sup>1</sup>Not available for HP 8657A/B Option 022 or HP 8657D.

<sup>2</sup>Pulse modulation is factory installable only.

<sup>3</sup>Option 022 must be purchased at time of order and cannot be retrofitted.

### Manuals

| Description                   | HP 8656B    | HP 8657A    | HP 8657B    | HP 8657D    |
|-------------------------------|-------------|-------------|-------------|-------------|
| Operation/Calibration Manual  | 08657-90115 | 08657-90115 | 08657-90115 | 08657-90107 |
| Service Manual                | 08656-90205 | 08657-90004 | 08657-90007 | 08657-90131 |
| Option 022 Op/Cal Supplement  | N/A         | 08657-90062 | Contact HP  | N/A         |
| Option 022 Service Supplement | N/A         | 08657-90064 | Contact HP  | N/A         |

### Transit Cases

| Description                        | HP 8656B  | HP 8657A               | HP 8657B               | HP 8657D               |
|------------------------------------|-----------|------------------------|------------------------|------------------------|
| Transit Case (mainframe only)      | 9211-2655 | 9211-2655 <sup>4</sup> | 9211-2661 <sup>4</sup> | 9211-2661 <sup>4</sup> |
| Transit Case for digital modulator | N/A       | 9211-2648 <sup>4</sup> | 9211-2648 <sup>4</sup> | 9211-2654 <sup>4</sup> |

<sup>4</sup>For instruments fitted with a digital modulator (HP 8657D or HP 8657A/B with Option 022), the digital modulator must be removed and shipped in a separate transit case to avoid instrument damage. The HP 8657A/B Option 022 0.3 GMSK modulator is a non-standard size, but may be shipped in a larger transit case (9211-2648) with additional padding.

### Handles and Rack Mount Accessories

| Description                                                      | HP 8656B, HP 8657A, HP 8657B (except Option 022 instruments - Contact HP) | HP 8657D  |
|------------------------------------------------------------------|---------------------------------------------------------------------------|-----------|
| Front Handle Kit                                                 | 5062-3989                                                                 | 5062-3991 |
| Rack Mount Flange Kit                                            | 5062-3977                                                                 | 5062-3979 |
| Rack Flange Kit with Handles                                     | 5062-3983                                                                 | 5062-3985 |
| Rack Flange Kit for instruments with previously supplied handles | 5062-4071                                                                 | 5062-4073 |

Rack Slide Kit (not available for HP 8657A/B Option 022), 1494-0060.

Slide Adapter Bracket (converts standard rack slides for non-HP rack enclosures), 1494-0061.

### Accessories

HP 8347A RF Amplifier, 100 kHz to 3 GHz, leveled +2 to +20 dBm, >25 dB gain.

HP 11721A Frequency Doubler, 50 to 1300 MHz input, <15 dBm conversion loss at +13 dBm.

HP 11687A 50-75Ω Adapter with type N connectors, dc to 1300 MHz.

---

HP sales office listed in your telephone directory or an HP regional office listed below for the location of your nearest sales office.

**United States:**

Hewlett-Packard Company  
4 Choke Cherry Road  
Rockville, MD 20850  
(301) 670 4300

Hewlett-Packard Company  
5201 Tollview Drive  
Rolling Meadows, IL 60008  
(708) 255 9800

Hewlett-Packard Company  
5161 Lankershim Blvd.  
No. Hollywood, CA 91601  
(818) 505 5600

Hewlett-Packard Company  
2015 South Park Place  
Atlanta, GA 30339  
(404) 955 1500

**Canada:**

Hewlett-Packard Ltd.  
6877 Goreway Drive  
Mississauga, Ontario L4V 1M8  
(416) 678 9430

**European Headquarters:**

Hewlett-Packard S.A.  
150, Route du Nant d'Avril  
1217 Meyrin 2  
Geneva -- Switzerland  
41/22 780 8111

**Japan:**

Yokogawa-Hewlett-Packard Ltd.  
15-7, Nishi Shinjuku 4 Chome  
Shinjuku-ku  
Tokyo 160, Japan  
(03) 5371 1315

**Latin America:**

Hewlett-Packard  
Latin American Region Headquarters  
Monte Pelvoux No. 111  
Lomas de Chapultepec  
11000 Mexico, D.F. Mexico  
(525) 202 0155

**Australia/New Zealand:**

Hewlett-Packard Australia Ltd.  
31-41 Joseph Street  
Blackburn, Victoria 3130  
Australia  
(03) 895 2895

**Far East:**

Hewlett-Packard Asia Ltd.  
22/F Bond Centre,  
West Tower  
89 Queensway  
Central, Hong Kong  
(852) 848 7777

In Europe, please call your local HP sales office or representative:

**Austria:** (0222) 2500-0

**Central Europe, USSR,  
and Yugoslavia:**  
Vienna - Austria  
(0222) 2500-0

**Belgium and Luxembourg:**  
(02) 761 31 11

**Denmark:** (42) 81 66 40

**Finland:** (90) 88 721

**France:** (1) 69 82 60 60

**Germany:** (06172) 16 0

**Greece:** (01) 68 28 811

**Iceland:** (91) 67 10 00

**Ireland:** (01) 88 33 99

**Israel:**

Computation and Measurement  
Systems (CMS) Ltd.  
(03) 5380 333

**Italy:** (02) 95 300 134

**Netherlands:** (020) 547 6669

**Norway:** (02) 87 97 00

**Portugal:** (11) 301 73 30

**Spain:** 900 123 123

**Sweden:** (08) 750 20 00

**Switzerland:**

(057) 31 21 11 (Headoffice)  
(022) 780 41 11 (Suisse Romande)  
(046) 05 15 05 (Customer Information  
Center)

**South Africa:**

HiPerformance Systems  
(011) 802 5111

**Turkey:** 175 29 70

**U.K.:** (0344) 369 369

**Europe/Africa/Middle East:**

Hewlett-Packard S.A.  
Marcom Operations Europe  
P.O. Box 529  
1180 AM Amstelveen  
The Netherlands

**Copyright © 1991  
Hewlett-Packard Company**

**Data subject to change  
Printed in U.S.A. 6/91  
5091-1556 E**

# **Artisan Technology Group** is an independent supplier of quality pre-owned equipment

## **Gold-standard solutions**

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## **We buy equipment**

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## **Learn more!**

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisanTG.com](mailto:sales@artisanTG.com) | [artisanTG.com](https://www.artisanTG.com)

