ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Pilz PNOZ 11* at our website: *Click HERE*

Up to Category 4, EN 954-1
PNOZ 11



Safety relay for monitoring E-STOP pushbuttons and safety gates.

Approvals

	PNOZ 11
BG-PRÜFZERT	◆
c UL us LISTED	◆
CCC	◆

Unit features

- Positive-guided relay outputs:
  - 7 safety contacts (N/O), instantaneous
  - 1 auxiliary contact (N/C), instantaneous
- Connection options for:
  - E-STOP pushbutton
  - Safety gate limit switch
  - Reset button
- LED indicator for:
  - Switch status channel 1/2
  - Supply voltage
  - Reset circuit
  - Input circuits
- Semiconductor output signals:
  - Switch status channel 1/2
  - Supply voltage is present
- See order reference for unit types

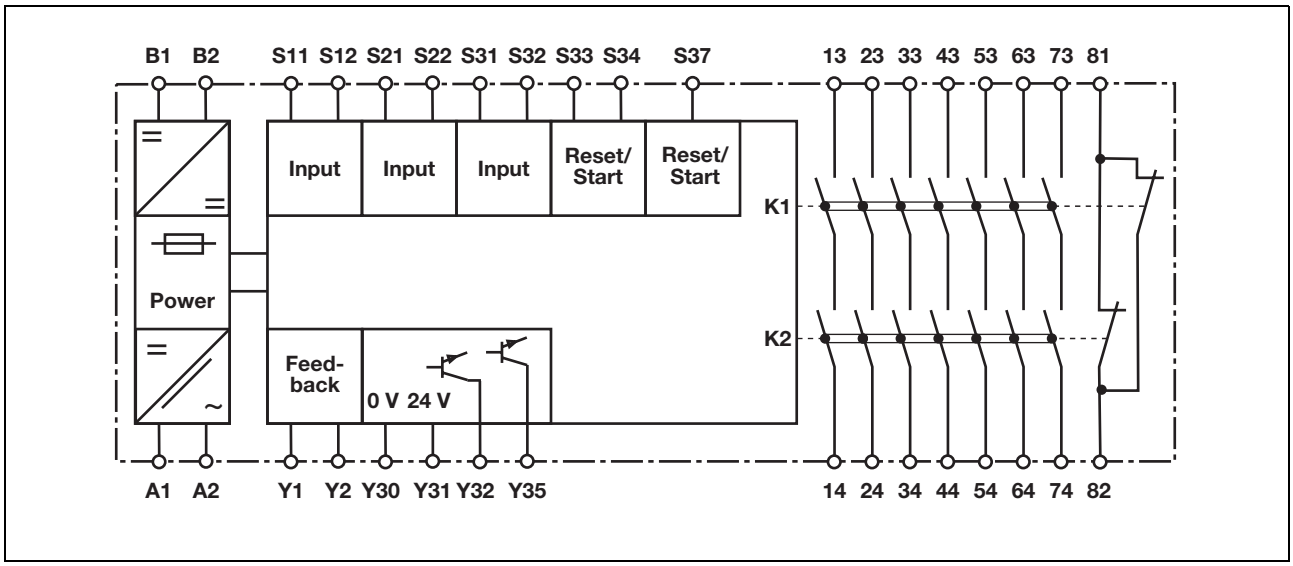
Unit description

The safety relay meets the requirements of EN 60204-1 and IEC 60204-1 and may be used in applications with
- E-STOP pushbuttons
- Safety gates

Safety features

The relay conforms to the following safety criteria:
- The circuit is redundant with built-in self-monitoring.
- The safety function remains effective in the case of a component failure.
- The correct opening and closing of the safety function relays is tested automatically in each on-off cycle.
- The tranformer is short circuit-proof.

Block diagram




Pilz GmbH & Co. KG, Sichere Automation, Felix-Wankel-Straße 2, 73760 Ostfildern, Germany
Telephone: +49 711 3409-0, Telefax: +49 711 3409-133, E-Mail: pilz.gmbh@pilz.de
NSG-D-2-058-12/04

Up to Category 4, EN 954-1
PNOZ 11

Function description

- Single-channel operation: no redundancy in the input circuit, earth faults in the reset circuit are detected.
- Dual-channel operation with detection of shorts across contacts: redundant input circuit, detects
  - earth faults in the reset and input circuit,
  - short circuits in the input circuit and, with a monitored reset, in the reset circuit too,
  - shorts between contacts in the input circuit.
- Automatic start: Unit is active once the input circuit has been closed.
- Manual reset: Unit is active once the input circuit is closed and then the reset circuit is closed.
- Monitored reset: Unit is active once
  - the input circuit is closed and then the reset circuit is closed and opened again.
  - the reset circuit is closed and then opened again once the input circuit is closed.
- Increase in the number of available contacts by connecting contact expander modules or external contactors/relays.

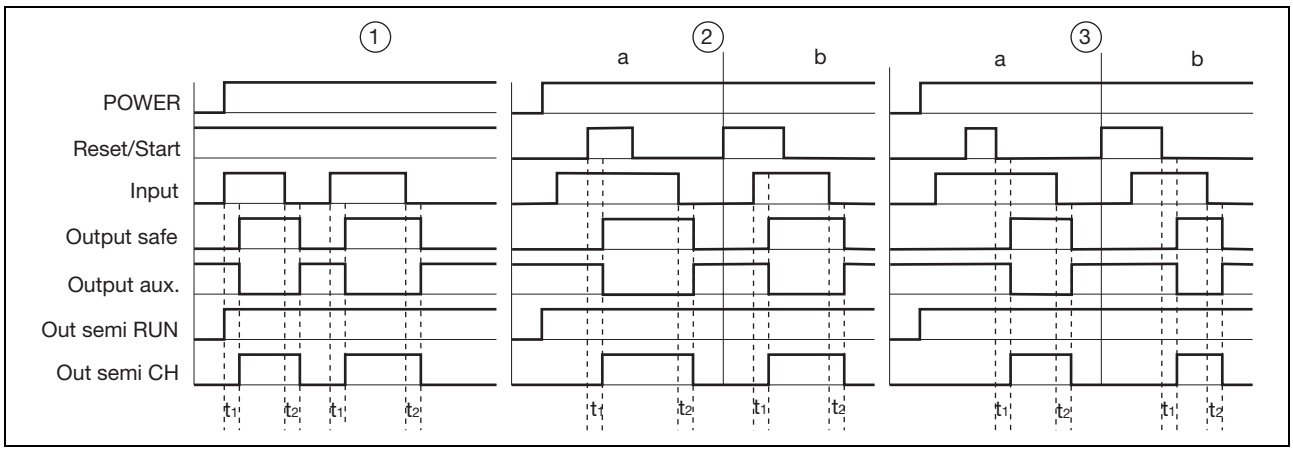Timing diagram



Key

- Power: Supply voltage
- Reset/start: Reset circuit S33-S34, S34-S37
- Input: Input circuits S11-S12, S21-S22, S31-S32
- Output safe: Safety contacts 13-14, 23-24, 33-34, 43-44, 53-54, 63-64, 73-74
- Output aux: Auxiliary contacts 81-82
- Out semi RUN: Semiconductor output supply voltage Y35
- Out semi CH: Semiconductor output switch status Y32
- ①: Automatic reset
- ②: Manual reset
- ③: Monitored reset
- a: Input circuit closes before reset circuit
- b: Reset circuit closes before input circuit
- t_1: Switch-on delay
- t_2: Delay-on de-energisation

Wiring

Please note:

- Information given in the “Technical details” must be followed.
- Outputs 13-14, 23-24, 33-34, 43-44, 53-54, 63-64, 73-74 are safety contacts, output 81-82 is an auxiliary contact (e.g. for display).
- To prevent contact welding, a fuse should be connected before the output contacts (see technical details).
- Calculation of the max. cable runs I_{max} in the input circuit:

$$I_{max} = \frac{R_{lmax}}{R_l / km}$$

R_{lmax} = max. overall cable resistance (see technical details)
R_l / km = cable resistance/km



- Use copper wire that can withstand 60/75 °C.
- Sufficient fuse protection must be provided on all output contacts with capacitive and inductive loads.

Pilz GmbH & Co. KG, Sichere Automation, Felix-Wankel-Straße 2, 73760 Ostfildern, Germany
Telephone: +49 711 3409-0, Telefax: +49 711 3409-133, E-Mail: pilz.gmbh@pilz.de








Up to Category 4, EN 954-1
PNOZ 11

Preparing for operation

- Supply voltage






Supply voltage	AC	DC
		

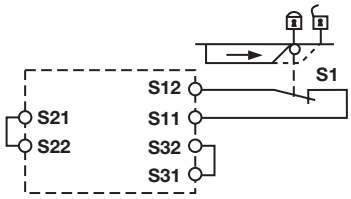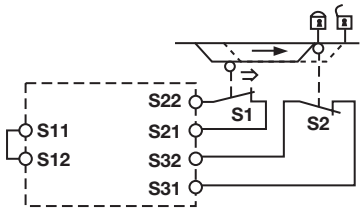- Input circuit



Input circuit	Single-channel	Dual-channel
E-STOP **without** detection of shorts across contacts		
E-STOP **with** detection of shorts across contacts		
Safety gate **without** detection of shorts across contacts		
Safety gate **with** detection of shorts across contacts		

Up to Category 4, EN 954-1
PNOZ 11

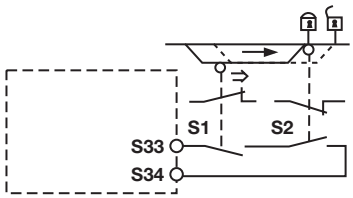
▸ Reset circuit

Reset circuit	E-STOP wiring, safety gate	Safety gate (dual-channel)
Automatic reset		
Manual reset		
Monitored reset		

▸ Feedback loop

Feedback loop	Automatic reset	Manual/monitored reset:
Link		
Contacts from external contactors		

▸ Semiconductor output



Pilz GmbH & Co. KG, Sichere Automation, Felix-Wankel-Straße 2, 73760 Ostfildern, Germany
Telephone: +49 711 3409-0, Telefax: +49 711 3409-133, E-Mail: pilz.gmbh@pilz.de

more than automation
safe automation

Up to Category 4, EN 954-1
PNOZ 11


- Key

S1	E-STOP pushbutton
S1/S2	Two-hand button
S1/S2	E-STOP pushbutton/ safety gate switch
S3	Reset button
	Switch operated
	Gate open
	Gate closed

Pilz GmbH & Co. KG, Sichere Automation, Felix-Wankel-Straße 2, 73760 Ostfildern, Germany
Telephone: +49 711 3409-0, Telefax: +49 711 3409-133, E-Mail: pilz.gmbh@pilz.de

Up to Category 4, EN 954-1
PNOZ 11

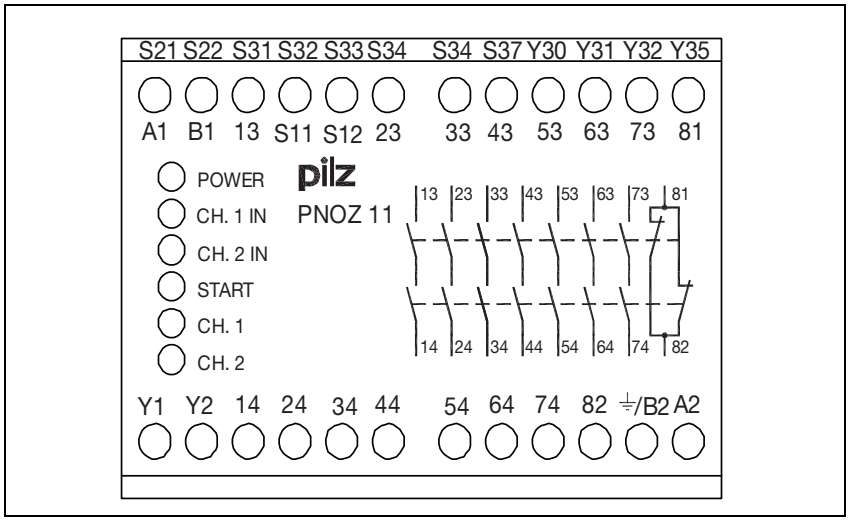
Terminal configuration



Installation

- The safety relay should be installed in a control cabinet with a protection type of at least IP54.
- Use the notch on the rear of the unit to attach it to a DIN rail.
- Ensure the unit is mounted securely on a vertical DIN rail (35 mm) by using a fixing element (e.g. retaining bracket or an end angle).

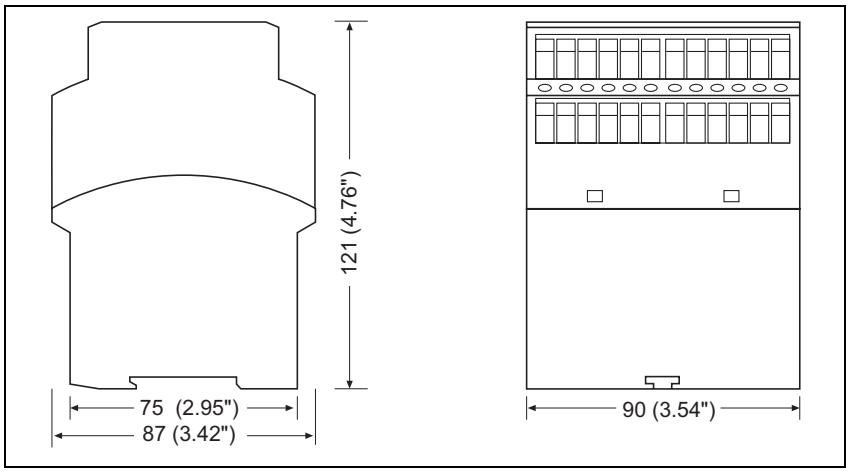Dimensions




Pilz GmbH & Co. KG, Sichere Automation, Felix-Wankel-Straße 2, 73760 Ostfildern, Germany
Telephone: +49 711 3409-0, Telefax: +49 711 3409-133, E-Mail: pilz.gmbh@pilz.de

Up to Category 4, EN 954-1
PNOZ 11

Notice

This data sheet is only intended for use during configuration. For installation and operation, please refer to the operating instructions supplied with the unit.

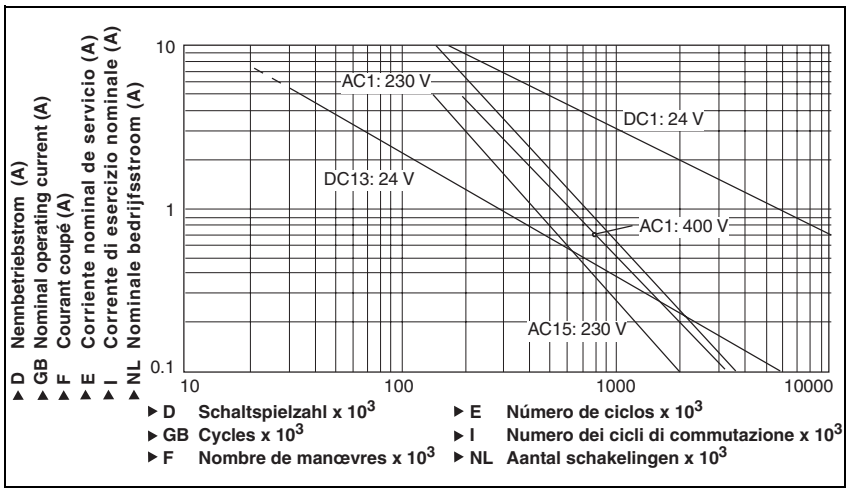Service life graph



Technical details

Electrical data	
Supply voltage	
Supply voltage U_B AC	**24 V**, **42 V**, **48 V**, **110 - 120 V**, **230 - 240 V**
Supply voltage U_B DC	**24 V**
Voltage tolerance	**-15 %/+10 %**
Power consumption at U_B AC	**9.0 VA**
Power consumption at U_B DC	**3.5 W**
Frequency range AC	**50 - 60 Hz**
Residual ripple DC	**160 %**
Voltage and current at	
input circuit DC: **24.0 V**	**50.0 mA**
reset circuit DC: **24.0 V**	**45.0 mA**
feedback loop DC: **24.0 V**	**45.0 mA**
Output contacts in accordance with **EN 954-1** Category **4**	Safety contacts (N/O): **7** Auxiliary contacts (N/C): **1**
Utilisation category in accordance with **EN 60947-4-1**	
Safety contacts: AC1 at **240 V**	I_{min}: **0.01 A** , I_{max}: **8.00 A** P_{max}: **2,000 VA**
Safety contacts: AC1 at **400 V**	I_{min}: **0.01 A** , I_{max}: **5.00 A** P_{max}: **2,000 VA**
Safety contacts: DC1 at **24 V**	I_{min}: **0.01 A** , I_{max}: **8.0 A** P_{max}: **200 W**
Auxiliary contacts: AC1 at **240 V**	I_{min}: **0.01 A** , I_{max}: **8.0 A** P_{max}: **2,000 VA**
Auxiliary contacts: DC1 at **24 V**	I_{min}: **0.01 A** , I_{max}: **8.0 A** P_{max}: **200 W**
Utilisation category in accordance with **EN 60947-5-1**	
Safety contacts: AC15 at **230 V**	I_{max}: **5.0 A**
Safety contacts: DC13 at **24 V** (6 cycles/min)	I_{max}: **7.0 A**
Auxiliary contacts: AC15 at **230 V**	I_{max}: **5.0 A**
Auxiliary contacts: DC13 at **24 V** (6 cycles/min)	I_{max}: **7.0 A**

Pilz GmbH & Co. KG, Sichere Automation, Felix-Wankel-Straße 2, 73760 Ostfildern, Germany
Telephone: +49 711 3409-0, Telefax: +49 711 3409-133, E-Mail: pilz.gmbh@pilz.de

Up to Category 4, EN 954-1
PNOZ 11

Electrical data	
External contact fuse protection to **EN 60947-5-1**	
Blow-out fuse, quick	
Safety contacts:	**10 A**
Auxiliary contacts:	**10 A**
Blow-out fuse, slow	
Safety contacts:	**6 A**
Auxiliary contacts:	**6 A**
Circuit breaker 24 VAC/DC, characteristic B/C	
Safety contacts:	**6 A**
Auxiliary contacts:	**6 A**
Semiconductor outputs (short circuit proof)	**24.0 V** DC, **20 mA**
External supply voltage	**24.0 V** DC
Voltage tolerance	**-20 %/+20 %**
Max. overall cable resistance R_{lmax} input circuits, reset circuits	
single-channel at U_B DC	**50 Ohm**
single-channel at U_B AC	**100 Ohm**
dual-channel with detect. of shorts across contacts at U_B DC	**15 Ohm**
dual-channel with detect. of shorts across contacts at U_B AC	**20 Ohm**
Times	
Switch-on delay	
with automatic reset max.	**450 ms**
with automatic reset after power on max.	**480 ms**
with manual reset typ.	**335 ms**
with manual reset max.	**450 ms**
with monitored reset max.	**450 ms**
Delay-on de-energisation	
with E-STOP typ.	**17 ms**
with E-STOP max.	**30 ms**
with power failure typ.	**40 ms**
with power failure max.	**60 ms**
Recovery time at max. switching frequency 1/s	
after E-STOP	**50 ms**
after power failure	**100 ms**
Min. start pulse duration with a monitored reset	**30 ms**
Simultaneity, channel 1 and 2	∞
Supply interruption before de-energisation	**10 ms**
Environmental data	
EMC	**EN 60947-5-1**, **EN 61000-6-2**
Vibration in accordance with **EN 60068-2-6**	
Frequency	**10 - 55 Hz**
Amplitude	**0.35 mm**
Climatic suitability	**EN 60068-2-78**
Airgap creepage	**VDE 0110-1**
Ambient temperature	**-10 - 55 °C**
Storage temperature	**-40 - 85 °C**
Protection type	
Mounting (e.g. control cabinet)	**IP54**
Housing	**IP40**
Terminals	**IP20**
Mechanical data	
Housing material	
Housing	**PPO UL 94 V0**
Front	**ABS UL 94 V0**

Pilz GmbH & Co. KG, Sichere Automation, Felix-Wankel-Straße 2, 73760 Ostfildern, Germany
Telephone: +49 711 3409-0, Telefax: +49 711 3409-133, E-Mail: pilz.gmbh@pilz.de

Up to Category 4, EN 954-1
PNOZ 11

Mechanical data	
Max. cross section of external conductors with screw terminals	
1 core flexible	**0.20 - 4.00 mm², 24 - 10 AWG**
2 core, same cross section, flexible:	
with crimp connectors, without insulating sleeve	**0.20 - 2.50 mm², 24 - 14 AWG**
without crimp connectors or with TWIN crimp connectors	**0.20 - 2.50 mm², 24 - 14 AWG**
Torque setting with screw terminals	**0.60 Nm**
Dimensions	
Height	**87.0 mm**
Width	**90.0 mm**
Depth	**121.0 mm**
Weight	**640 g**

The standards current on **09/01** apply.

Max. continuous current

Number of contacts	I_{max} (A) at U_B DC	I_{max} (A) at U_B AC
1	**8 A**	**8 A**
2	**8 A**	**8 A**
3	**8 A**	**6.80 A**
4	**6.90 A**	**5.90 A**
5	**6.20 A**	**5.30 A**
6	**5.60 A**	**4.80 A**
7	**5.20 A**	**4.50 A**

Order reference

Type	Features		Terminals	Order no.
PNOZ 11	24 VAC	24 VDC	Screw terminals	774 080
PNOZ 11	42 VAC	24 VDC	Screw terminals	774 081
PNOZ 11	48 VAC	24 VDC	Screw terminals	774 082
PNOZ 11	110 - 120 VAC	24 VDC	Screw terminals	774 085
PNOZ 11	230 - 240 VAC	24 VDC	Screw terminals	774 086

Pilz GmbH & Co. KG, Sichere Automation, Felix-Wankel-Straße 2, 73760 Ostfildern, Germany
Telephone: +49 711 3409-0, Telefax: +49 711 3409-133, E-Mail: pilz.gmbh@pilz.de

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP