

ICS ICS-110B-32B

32-Channel, 24-Bit Sigma-Delta ADC VME Module



In Stock

Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/70367-3>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.


Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

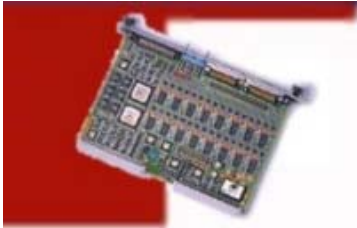

ICS-110B

32-Ch., 100 kHz/Ch., 24-Bit Sigma-Delta ADC Board

View an [enlargement](#) by clicking
on the image above

The ICS-110B is designed to provide a complete data acquisition solution in a single 6U VMEbus slot. The ICS-110B mother board includes thirty-two 24-bit, 100 kHz/channel Sigma-Delta ADCs. The ICS-110B includes a daughter board and provides 2-pole anti-alias filtering consistent with the anti-aliasing requirements of the Sigma-Delta ADCs, programmable gain of up to 31.5 dB in 0.5 dB steps, and internal test signal generation and injection capabilities for performance monitoring and fault location (PM/FL).

Designed for applications in sonar, digital audio, vibration analysis and test and measurement, the ICS-110B board combines the ultimate in analog and digital technologies to offer unparalleled features and performance. The high channel density of this board allows the user to implement a system with over 500 channels of signal conditioning and data acquisition (with simultaneous sampling at high sample rates) in a single VMEbus enclosure.


MOTHERBOARD FEATURES:

- Optional 16-bit operating mode;
- Simultaneous sampling at rates of up to 100 kHz/ch.;
- Software selectable highpass filter for low frequency rejection;
- External or internal clock and trigger;
- Internal clock programmable in steps of less than 20 Hz;
- Greater than 105 dB signal-to-noise ratio (including harmonic distortion and crosstalk);
- VME, VSB and FPDP interfaces;
- Up to 32 boards can be bussed over FPDP; and
- Software device drivers for VxWORKS and Solaris.

OPTIONAL DAUGHTER BOARD FEATURES:

- Up to 32 high impedance differential inputs;
- 2-pole lowpass anti-alias filters (which can be bypassed);
- -31.5 dB to 31.5 dB programmable gain in steps of 0.5 dB;
- Internal or external test signal injection; and Internal test signal stored in PROM.

BLOCK DIAGRAM:

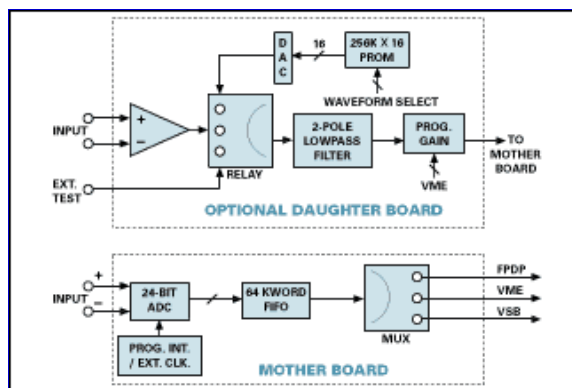

ICS-110B SINGLE CHANNEL BLOCK DIAGRAM
(Click on diagram for an [enlargement](#))

MOTHERBOARD SPECIFICATIONS:

No. of Differential Analog Inputs:	8,16 or 32
Input Impedance:	10 kilo Ohms
Full Scale Input:	2.0 Vpp differential (each wire)
Max. Input Signal BW:	43 kHz (-3 db)
Input Sample Rate:	128 x Output Rate for BW < 22 kHz 64 x Output Rate for BW > 22 kHz
Output Rate (Effective Sample Rate):	Max. 100 kHz/Ch. Min 2 kHz/Ch.
Internal Sample Clock:	Programmable in steps of 20 Hz
Signal-to-Noise:	>110 dB in 128x mode > 105 dB in 64X mode
Total Harmonic Distortion:	-105 dB
Crosstalk:	-105 dB
On-Board Storage:	64 KWords
Output Word Length:	32 bits packed for 2 channels or 24 bits for 1 channel on both VME or VSB 24 bits only on FPDP
VMEbus Interface:	A32/24/16 D32 BLT Slave Vectored interrupts
VSBbus Interface:	A32 D32 BLT Slave Polled interrupts
FPDP Interface:	32-bit, 80 Mbytes/s
Power:	7 A @ +5 V 0.5 A @ +12 V 0.24 A @ -12 V
Operating Temp:	0 degrees to +50 degrees Celsius
Storage Temp:	-40 degrees to +85 degrees Celsius
Humidity:	90% RH, non-condensing
Board Size:	233 x 160 mm (VMEbus 6U)

ORDERING INFORMATION:

ICS-110B-yy

- VMEbus ADC board (Motherboard only) with 2 Vpp differential input range
- **yy**: Number of channels (8,16 or 32)



ICS-110B-32B

- VMEbus ADC board (32-channel motherboard only) with 10 Vpp differential input range



ICS-110B1-yy-AA

- VMEbus ADC board with Signal-conditioning daughter card
- **yy**: Number of channels (8,16 or 32)
- **AA**: 3.5, 35, 75; Anti-alias filter cutoff frequency in kHz (contact the factory for other options)



DRV-110B-VXW

- Software device driver for VxWORKS operating system



DRV-110B-SSS

- Software device driver for Solaris operating system



To order the ICS-110B, please contact an

Note: Specifications are subject to change without notice

DAUGHTERCARD SPECIFICATIONS:

No. of Differential Inputs:	8, 16 or 32
Input Impedance:	> 1 M Ohms (with ± 5 V max. input) > 100 k Ohms (with ± 25 V max. input)
Max. Input Level:	Up to 50 Vpp differential (Contact the factory for required option)
Lowpass Filter:	2-Pole Butterworth with a cut-off frequency of 75 kHz for a flat response up to 44 kHz (see ordering information for other options)
Gain:	-31.5 dB to 31.5 dB in steps of 0.5 dB
External Test Signal:	7 Vpp single-ended max.
Internal Test Signal:	Eight 16-bit pre-programmed waveforms in a 256K x 16 PROM
Signal-to-(Noise+THD+Crosstalk):	> 85 dB at 0 dB Gain and 2 Vpp Differential input
Power:	0.5 A @ +5 V 0.26 A @ +12 V 0.17 A @ -12 V
Environmental:	Same as the ICS-110B Motherboard

Note: Specifications are subject to change without notice

MORE INFORMATION:

- [ICS Tech Note, Input No. 24B](#), "ICS-110B 24-Bit Data Acquisition Board"
- [ICS Tech Note, Input No. 19B](#), "Real-Time Data Acquisition Solutions for Large Applications"
- [ICS Tech Note, Input No. 12B](#), "Rapid Deployment of COTS Solutions for Sonar Processing"
- [ICS White Paper](#), "A Breakthrough in Mine Sonar Implementation"

ICS [SALES OFFICE](#) near you

or [CONTACT US](#) directly

Copyright 2000. Interactive Circuits and Systems Ltd.

[LAUNCH](#) the "ICS REMOTE CONTROL" and browse our catalog index with ease!



[CATALOG INDEX](#) [HOME](#) [REQUEST INFORMATION](#) [CONTACT US](#) [PREVIOUS](#) [NEXT](#)

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanng.com | [artisanng.com](https://www.artisanng.com)

