

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

PRL-414B-C003 1:4 FANOUT, 5V into 50 Ω TTL LINE DRIVER

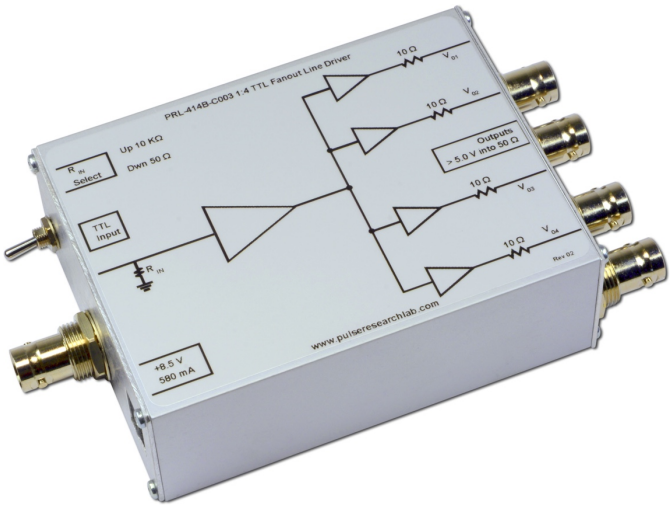

PRL-414B-C003-BNC

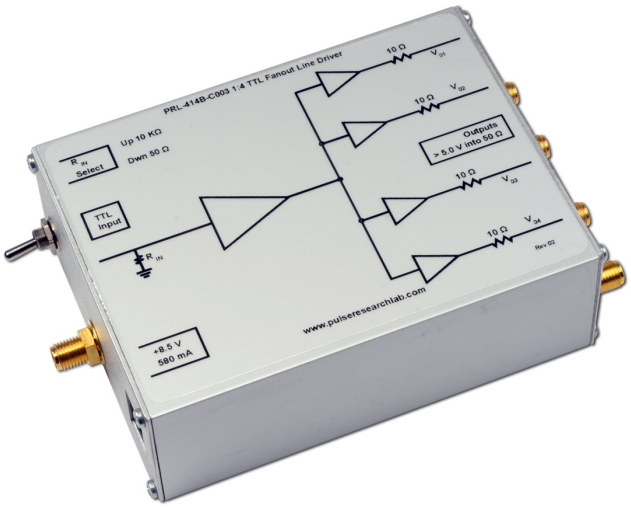

PRL-414B-C003-SMA

APPLICATIONS

- 1 PPS Distribution for GPS
- 5 V TTL/CMOS Signal Distribution
- 1:4 Fanout Line Driver
- High Speed Digital Communications System Testing
- Mini Modular Instrument

FEATURES

- f_{max} > 75 MHz, 80 MHz Typical
- 5 V outputs for driving 50 Ω loads
- Drives 100 ft of cable @ 50 MHz
- 2 ns Typical Output Rise & Fall Times
- TTL Compatible 50 Ω or 10 kΩ Input
- Four in-phase 50 Ω TTL Outputs
- BNC or SMA I/O Connectors
- DC Coupled I/Os
- Self-contained 1.3 x 2.9 x 3.9-in. unit includes AC/DC Adapter
- Can also operate from a single 8.0 V to 12.0 V supply

DESCRIPTION

The PRL-414B-C003 is a modified version of the standard PRL-414B 1:4 fanout 50 Ω TTL Line Driver. In this modified version, all outputs can deliver 5 V into 50 Ω loads. It is intended for distribution of high-speed clock and data signals to multiple loads via long lines. With 50 Ω load terminations, all outputs of the PRL-414B-C003 can drive 100 ft of 50 Ω cables at clock rates greater than 50 MHz. The PRL-414B-C003 is also used for distributing 1 PPS clock signals from popular GPS receivers to multiple instruments requiring 5 V into 50 Ω loads.

The input resistance of the PRL-414B-C003 can be selected to be either 50 Ω or 10 kΩ by a switch. The 10 kΩ input is desirable when interfacing with low power circuits. All I/Os are DC coupled and have either BNC or SMA connectors.

The PRL-414B-C003 is housed in a 1.3 x 2.9 x 3.9-in. extruded aluminum enclosure and is supplied with a ±8.5 V/±1.8 A AC/DC Adapter. It can also be operated from a single 8.0 V-12.0 V supply. A maximum of four units can share a single PRL-760C AC/DC adapter. If mounting is desired, a pair of the # 35001420 mounting brackets can accommodate any two PRL modules of the same length. Please visit www.pulseresearchlab.com/accessories for more detail.

A block diagram showing the equivalent input and output circuits of the PRL-414B-C003 is shown in Fig. 1.

1234 Francisco Street, Torrance, CA 90502
Tel: +1-310-515-5330 Fax: +1-310-515-0068
sales@pulseresearchlab.com
www.pulseresearchlab.com

SPECIFICATIONS* (0° C ≤ T_A ≤ 35°C)

Unless otherwise specified, dynamic measurements are made with the input set to 50 Ω and all outputs terminated into 50 Ω.

SYMBOL	PARAMETER	Min	Typ	Max	UNIT	Comments
$R_{IN\ Low}$	Input Resistance Low Range	49.5	50.0	50.5	Ω	
$R_{IN\ Hi}$	Input Resistance High Range	9.9	10.0	10.1	kΩ	
R_{OUT}	Output Resistance		10		Ω	
V_{IL}	TTL Input Low Level	-0.5	0.0	0.5	V	
V_{IH}	TTL Input High Level	2.0	2.4	5.0	V	
V_{OL}	TTL Output Low Level	0.0	0.25	0.5	V	R_L = 50 Ω
V_{OH1}	TTL Output High Level	5			V	R_L = 50 Ω f ≤ 50 MHz
V_{OH2}	TTL Output High Level	4.8	5.0		V	R_L = 50 Ω f ≤ 75 MHz
V_{OH3}	TTL Output High Level		6.0		V	R_L = 1 MΩ
I_{DC1}	DC Input Currents		480	500	mA	f ≤ 50 MHz
I_{DC2}	DC Input Currents		580	600	mA	f ≤ 75 MHz
V_{DC}	DC Input Voltages	8.0	8.5	12	V	
V_{AC}	AC/DC Adapter Input Voltage	105	115	127	V	
T_{PLH}	Propagation Delay to output ↑		14	20	ns	
T_{PHL}	Propagation Delay to output ↓		16	20	ns	
t_r	Rise Time (10%-90%)		2.2	3.0	ns	f =50 MHz sq. wave
t_f	Fall Time (10%-90%)		1.8	3.0	ns	f =50 MHz sq. wave
T_{SKEW}	Skew between any 2 outputs		500	1500	ps	f =50 MHz sq. wave
F_{max1}	Max. Clock Frequency(2)	75	80		MHz	RG58C/U, Cable length =3 ft
F_{max2}	Max. Clock Frequency(3)		50		MHz	RG58C/U, Cable length =100 ft
PWmin	Minimum Pulse Width		6		ns	↑ Input
PWmin	Minimum Pulse Width		6		ns	↓ Input
	Size	1.3 x 2.9 x 3.9			in.	
	Weight	5			Oz	

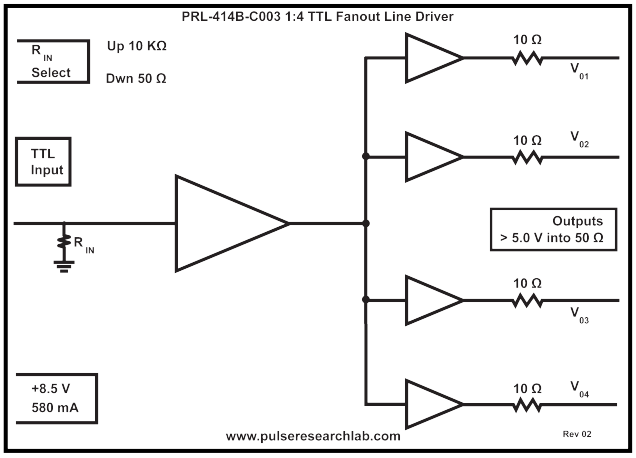


Fig. 1: PRL-414B-C003 Functional Block diagram

Notes:

(1). For sharing a single PRL-760C4, ±8.5 V, ±1.8 A AC/DC adapter, the total current should not exceed 1.8 A.@ the +8.5V output

(2). f_{MAX} should not exceed 85 MHz; otherwise, damage of the unit due to overheating may result.

(3). f_{MAX2} is measured by connecting a second PRL-414B at the end of the 100 ft cable.

1234 Francisco Street, Torrance, CA 90502
Tel: +1-310-515-5330 Fax: +1-310-515-0068
sales@pulseresearchlab.com
www.pulseresearchlab.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP