

ILX Lightwave LDC-3916374

1 Amp / 9 W Laser Diode Current Source and Temperature Control Module



\$1695.00

In Stock

Qty Available: 3

Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/53617-9>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

Measurement of 4-wire Voltage Sense on an LDC-3916 Laser Diode Controller

This technical note presents the results of voltage measurements on a typical laser diode control system, and highlights the advantage of the 4-wire voltage sense capability in the LDC-3916 and LDC-3700B Series Laser Diode Controllers.

MEASUREMENT SETUP

The measurement setup is shown in Figure 1. Typical cables were connected from the current source of an LDC-3916 Laser Diode Controller to a resistive load. A special adapter was made for the 9-pin connector on the LDC-3916, so voltages could be measured directly at the connector. The current source was set to drive a constant current through the load. Voltages were measured across the current source (V source), resistive load (V load), and voltage sense connections on the LDC-3916 connector (V sense). Cable lengths, resistor values, and current source setpoints were changed to measure different conditions.

RESULTS

Results are shown in Table 1 for six different conditions. The four wire voltage sense of the LDC-3916 increases the accuracy of the voltage measurement across the load. Increased voltage measurement accuracy translates to better laser diode protection, particularly in test setups with high current drive, and/or long cable runs between the controller and the laser diode.

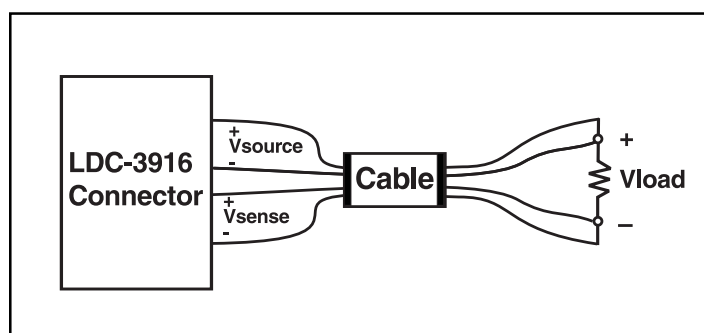


Figure 1. Measurement Setup.

	Current	Load	Cable	V source	V load	V sense
Case 1	250 mA	10 Ω	6 feet	2.66 V	2.50 V	2.50 V
Case 2	500 mA	10 Ω	6 feet	5.26 V	4.99 V	4.99 V
Case 3	1.0 A	5 Ω	6 feet	5.52 V	4.99 V	4.99 V
Case 4	250 mA	10 Ω	16 feet	2.84 V	2.50 V	2.50 V
Case 5	500 mA	10 Ω	16 feet	5.67 V	4.98 V	4.98 V
Case 6	900 mA	5 Ω	16 feet	5.71 V	4.49 V	4.49 V

Table 1. Results from Voltage Measurements.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisan^{tg}.com](https://www.artisantg.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisan^{tg}.com | [artisan^{tg}.com](https://www.artisantg.com)

