

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

PRL-414B, 1:4 FANOUT 50 Ω TTL/CMOS LINE DRIVER

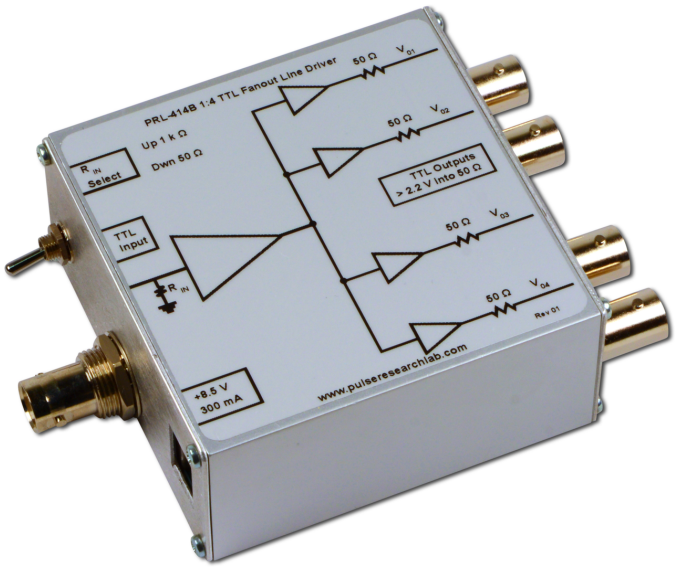

PRL-414B 1:4 TTL Fanout Line Driver

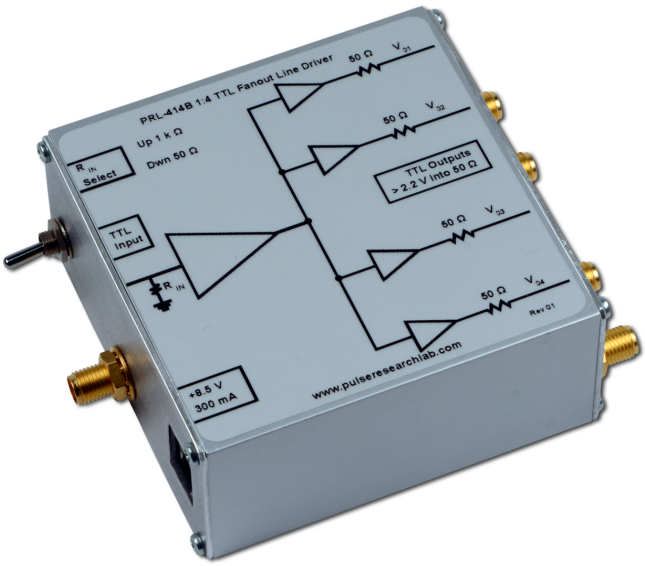

PRL-414B-SMA 1:4 TTL Fanout Line Driver

APPLICATIONS

- TTL/CMOS Clock Distribution
- 1:4 Fanout Line Driver
- High Speed Digital Communications System Testing
- Mini Modular Instrument™

FEATURES

- f_{max} > 135 MHz, typical
- Drives 100 ft of cable @ 80 MHz
- 2 ns Typical Output Rise & Fall Times
- TTL Compatible 50 Ω or 1 kΩ Input
- 500 ps typical channel-to-channel skew
- BNC or SMA I/O Connectors
- DC Coupled I/Os
- Self-contained 1.3 x 2.9 x 2.9-in. unit includes AC/DC Adapter

DESCRIPTION

The PRL-414B is a 1:4 fanout 50 Ω TTL Line Driver. It is intended for distribution of high-speed clock and logic signals to multiple loads via long lines. The 50 Ω back-terminated outputs can drive long lines with or without 50 Ω load terminations. With 50 Ω load terminations, all outputs of the PRL-414B can drive 100 ft of 50 Ω cables at clock rates greater than 80 MHz.

The input resistance of the PRL-414B can be selected to be either 50 Ω or 1 kΩ by a switch. The 1 kΩ input is desirable when interfacing with low power circuits.

All I/Os are DC coupled and have BNC or SMA connectors, as follows:

- PRL-414B, 1:4 Fanout 50 Ω TTL Line Driver, BNC I/Os
- PRL-414B-SMA, 1:4 Fanout 50 Ω TTL Line Driver, SMA I/Os

The PRL-414B is housed in a 1.3 x 2.9 x 2.9-in. extruded aluminum enclosure and is supplied with a PRL-760C, ±8.5 V/±1.8 A AC/DC Adapter, that can power up to four units with additional 88000102-4 DC power cables. If mounting is desired, a pair of the 35001420 mounting brackets can accommodate any two PRL modules of the same length. Please refer to the Accessories section of www.pulseresearchlab.com for more detail.

A block diagram showing the equivalent input and output circuits of the PRL-414B is shown in Fig. 1.

1234 Francisco Street, Torrance, CA 90502
Tel: 310-515-5330 Fax: 310-515-0068
sales@pulseresearchlab.com
www.pulseresearchlab.com

SPECIFICATIONS* (0° C ≤ T_A ≤ 35°C)

Unless otherwise specified, dynamic measurements are made with the input set to 50Ω and all outputs terminated into 50 Ω.

SYMBOL	PARAMETER	Min	Typ	Max	UNIT	Comments
$R_{in\ Low}$	Input Resistance Low Range	49.5	50	50.5	Ω	
$R_{in\ Hi}$	Input Resistance High Range	990	1000	1010	Ω	
Rout	Output Resistance		50		Ω	
V_{IL}	TTL input Low Level	-0.5	0	0.5	V	
V_{IH}	TTL input High Level	2.0	2.4	5.0	V	
V_{OL}	TTL Output Low Level	0	0.25	0.5	V	R_L=50 Ω
V_{OH1}	TTL Output High Level	2.2	2.5		V	R_L=50 Ω@ DC
V_{OH2}	TTL Output High Level	4.4	5		V	R_L=1 MΩ@ DC
I_{DC1}	DC Input Currents		280	350	mA	f ≤ 100 MHz
I_{DC2}	DC Input Currents		220	250	mA	f =50 MHz sq. wave(1)
V_{DC}	DC Input Voltages	7.75	8.5	12	V	
V_{AC}	AC/DC Adaptor Input Voltage	103	115	127	V	
T_{PLH}	Propagation Delay to output ↑		10	12	ns	
T_{PHL}	Propagation Delay to output ↓		8	12	ns	
t_r/t_f	Rise/Fall Times (10%-90%)		2.2/1.8	3	ns	f =50 MHz sq. wave
T_{SKEW}	Skew between any 2 outputs		500	1500	ps	f =50 MHz sq. wave
F_{max1}	Max. Clock Frequency(2)		100	120	MHz	RG58C/U Cable length =3 ft
F_{max2}	Max. Clock Frequency(3)		80			RG58C/U Cable length =100 ft
PWmin	Minimum Pulse Width		4		ns	↑ Input
PWmin	Minimum Pulse Width		6		ns	↓ Input
	Size	1.3 x 2.9 x 2.9			in.	
	Weight	5			Oz	

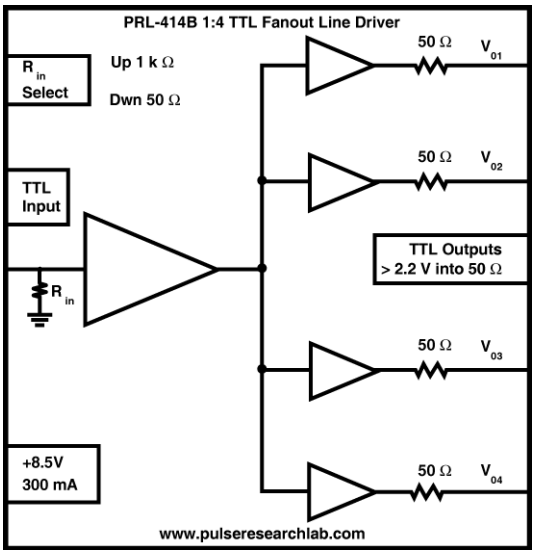


Fig. 1: PRL-414B Functional Block diagram

Notes:

(1). For sharing a single PRL-760C, ±8.5 V, ±1.8 A AC/DC adapter, the total current should not exceed 1.8 A.

(2). f_{MAX} should not exceed 120 MHz; otherwise, damage of the unit due to overheating may result.

(3). f_{MAX2} is measured by connecting a second PRL-414B at the end of the 100 ft cable.

Ordering Information:

- The PRL-414B may be ordered without the power supply as part number PRL-414B-OEM or PRL-414B-SMA-OEM.
- The PRL-414B may also be ordered with a guaranteed ≤500 ps channel to channel skew, by appending "-500ps" to the model number, e.g. PRL-414B-500ps or PRL-414B-SMA-500ps. An additional charge will apply.

1234 Francisco Street, Torrance, CA 90502
Tel: 310-515-5330 Fax: 310-515-0068
sales@pulseresearchlab.com
www.pulseresearchlab.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP