

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*


PRL-420RS/RSTR DUAL CHANNEL TTL to RS-422 Translator

APPLICATIONS

- **Converting TTL/CMOS Signals to Differential 124 Ω RS-422 Signals**
- **High Speed Digital Communications Systems Testing**
- **Differential Long Line Drivers**

FEATURES

- **f_{max} > 250 MHz**
- **1.2 ns Typical Output Rise & Fall Times**
- **TTL Compatible 50 Ω Input**
- **1.5 V or 1 V Selectable Input Threshold**
- **Complementary 124 Ω Outputs**
- **BNC Input/SMA Output Connectors for PRL-420RS**
- **BNC Input/Triax Output Connectors for PRL-420RSTR**
- **DC Coupled I/Os**
- **Self-contained 1.3 x 2.9 x 3.9-in. unit including an AC/DC Adapter**

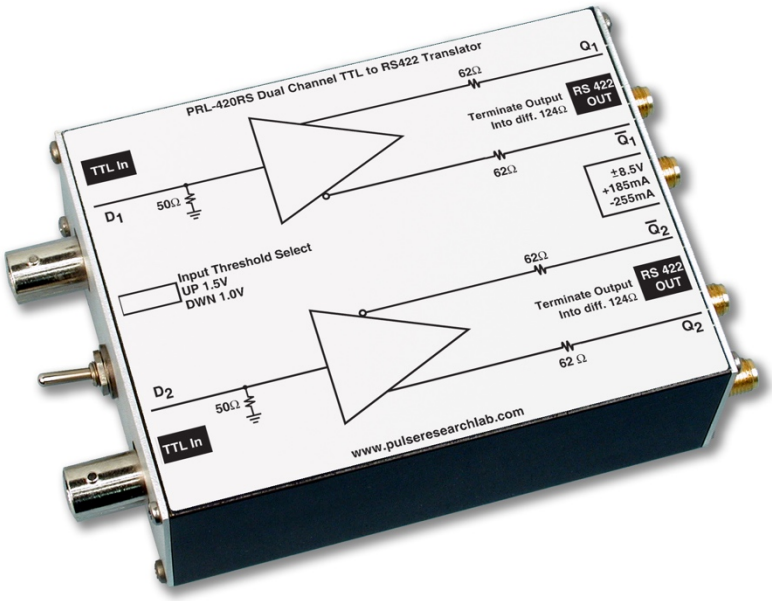

PRL-420RS

DESCRIPTION

The PRL-420RS is a dual channel, single-ended TTL input, differential 124 Ω RS-422 output line driver. Each channel has a 50 Ω TTL/CMOS compatible input and a pair of differential 124 Ω outputs for driving long lines, in excess of 100 ft, terminated into differential 124 Ω loads. The input threshold voltage can be selected between 1.5V and 1V using a front panel switch. The 1 V threshold makes it easy to interface with 3.3V TTL/CMOS devices.

The PRL-420RS outputs are designed to interface with the 124 Ω differential Serial Data/ $\overline{\text{Data}}$ or Clock/ $\overline{\text{Clock}}$ inputs of the data communications equipment and also for use in testing and interfacing of high speed digital communication circuits. The PRL-420RS complements other PRL-series Level Translators, such as the PRL-420ND/PD, PRL-450ND/PD, and PRL-460NPD/PND, etc., in system integration applications where interconnections among different logic signals are often necessary.

The PRL-420RS is a ready-to-use functional module housed in a 1.3 x 2.9 x 3.9-in. extruded aluminum enclosure and is supplied with a ±8.5 VAC/DC Adapter. BNC input and SMA output connectors are provided for the PRL-420RS model, and Triax output connectors for the PRL-420RSTR model. A block diagram showing the equivalent input and output circuits of the PRL-420RS are shown in Fig's. 1A and 1B.

1234 Francisco Street, Torrance, CA 9050 2
Tel: 310-515-5330 Fax: 310-515-0068
sales@pulseresearchlab.com
www.pulseresearchlab.com

SPECIFICATIONS (0^0 C ≤ T_A ≤ 35^0C)

Unless otherwise specified, dynamic measurements are made with all outputs terminated into 50Ω.

SYMBOL	PARAMETER	Min	Typ	Max	UNIT	Comments
R_{in}	Input Resistance	49.5	50	50.5	Ω	
Rout	Differential Output Resistance	122.6	124	125.3	Ω	
V_{TOSH}	Input Threshold Voltage (high)	1.4	1.5	1.6	V	
V_{TOSL}	Input Threshold Voltage (low)	0.9	1	1.1	V	
V_{IL}	TTL input Low Level	-0.5	0	0.5	V	
V_{IHH}	TTL input High Level	1.8	2	5	V	V_{TOSH}
V_{IHL}	TTL input High Level	1.2	1.3	5	V	V_{TOSL}
V_{OL}	RS422 Output Low Level	-0.05	0	0.2	V	Diff.124Ω load
V_{OH}	RS422 Output High Level		2.3	2.5	V	Diff.124Ω load
I_{DC}	DC Input Currents		185 -255	200 -275	mA mA	
V_{DC}	DC Input Voltages	±7.5	±8.5	±12	V	
V_{AC}	AC/DC Adaptor Input Voltage	103	115	127	V	
T_{PLH}	Propagation Delay to output ↑		2		ns	
T_{PHL}	Propagation Delay to output ↓		2		ns	
t_r/t_f	Rise/Fall Times (10%-90%)		1.2	1.4	ns	Note (1)
T_{SKEW}	Skew between any 2 outputs		150	400	ps	
f_{max}	Max Clock Frequency	250	300		MHz	Note (2)
	Size		1.3x2.9x3.9		in.	
	Weight		5		Oz	

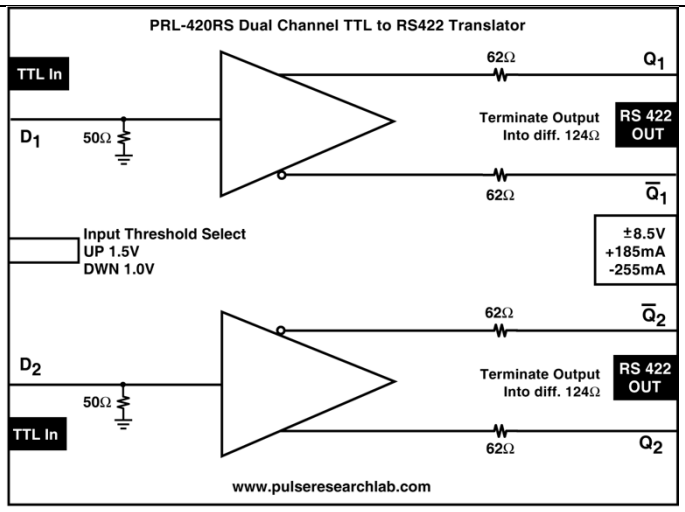


Fig. 1A PRL-420RS Block Diagram

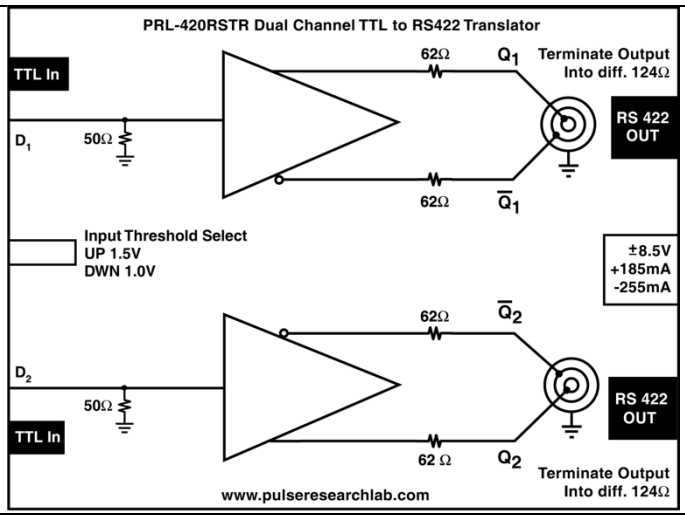


Fig. 1B PRL-420RSTR Block Diagram

Notes:

(1). The output rise and fall times are measured with both the Q and $\overline{Q}$ outputs terminated into 50 Ω.

(2). f_{MAX} is measured by connecting its inputs to the PRL450ND, ECL to TTL Logic Level Translator, and its outputs to the PRL-422RS, RS422 to NECL translator. The outputs of the PRL 422RS are then measured using the PRL-550NQ4X, four channel ECL Terminators, connected to a 50 Ω input sampling scope.

1234 Francisco Street, Torrance, CA 9050 2
Tel: 310-515-5330 Fax: 310-515-0068
sales@pulseresearchlab.com
www.pulseresearchlab.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP