

JDSU MAPF+1GK0X1FP

## MAP TB3 Tunable Grating Filter Module



**\$4895.00**

**In Stock**

**Qty Available: 1**

**Used and in Excellent Condition**

**Open Web Page**

<https://www.artisanng.com/61880-33>



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.

- Critical and expedited services
- In stock / Ready-to-ship
- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

# Multiple Application Platform

## MAP Series



MAP Master



MAP Benchtop

### Key Features

- Hot-swappable cassettes (cassettes can be inserted or removed without powering down)
- Dynamic MAP firmware and console that automatically identifies installed cassettes
- PC-based MAP Console program with drivers, ActiveX, Dynamic link libraries (DLL), LabVIEW and simulation mode
- Color display
- RS-232 and GPIB interface

### Applications

- Periodic reconfiguration and/or expansion capability
- High reliability/availability in a 24/7 manufacturing environment

### Safety Information

- Optical source cassettes, when installed in the MAP chassis, meet the requirements of standard IEC 60825-1(2002) and comply with 21 CFR 1040.10 except deviations per Laser Notice No. 50, July 2001
- CE Compliance plus UL3101-1 and CAN/CSA-C22.2 No. 1010.1

The Multiple Application Platform (MAP) is a flexible instrumentation platform used for optical test and measurement applications. It is available in two formats: a 19-inch 8-slot Master (MAP+2M00) and a 9.5-inch 3-slot Benchtop (MAP+2B00). They feature a common hot-swappable backplane compatible with over 15 different types of instrumentation cassettes.

The MAP Master and MAP Benchtop include a 9-key keypad, color display and remote communication ports.

### Chassis Selection

MAP is used when instrumentation selection needs to be based on current requirements without compromising future requirements. The MAP+2B00 and MAP+2M00 provide the most cost-effective solutions for test sets requiring three or fewer cassettes and four to eight cassettes respectively. In both cases, future expansions are possible by populating the empty slots (if available) or adding a second independent MAP+2B00 or MAP+2M00.



### MAP Master (MAP+2M00)

The MAP Master is built on a fully modular architecture. The main controller module, power supply module, keypad/display module and remote interface module are all field replaceable, thus making maintenance fast and simple. The keypad/display module and remote interface module of the MAP Master is interchangeable for rear mounting. Handling and rackmounting are made easy by using the practical handles located at the front and back of each chassis. When used on a bench, the tilting feet hold the chassis at an optimal angle for monitor visibility and keypad accessibility.

#### Key Features

- Front or back fiber connection
- 8-slot capacity
- All modules are field replaceable:
  - controller
  - power supply
  - keypad/display
  - remote interface



### MAP Benchtop (MAP+2B00)

The MAP Benchtop brings the MAP products to your lab bench without compromising performance. Its form factor and lower cost make it ideal for small test-sets. When test needs grow, software applications developed for the MAP Benchtop can be transferred to a MAP Master without any modifications.

#### Key Features

- 3-slot capacity
- compatible with external USB keyboard

### MAP Master Reconfigurability

Connectors Accessible at Front




Front



Rear

Connectors Accessible at Rear



Front



Rear


## Software

### Intuitive MAP Console and Drivers


MAP is supplied with comprehensive PC-based instrument drivers and MAP Console for added functionality. Drivers supplied include ActiveX, DLL, and LabVIEW. These provide full control of the cassettes and are compatible with all the standard Automation Development Environments (ADEs) including LabVIEW, Visual Basic™, and TestPoint™. These drivers provide drop-in instrument programming capabilities, allowing test programmers to focus on test level functions and sequences rather than the details required to communicate with the specific cassettes in the MAP system. During test execution, the MAP Console can also be placed in a supervisory mode and used to monitor and control the MAP platform to help support troubleshooting and to minimize downtime. The MAP Console comes with a built-in simulator allowing Automation Developers to capture system configurations who do most of their development off-line, freeing real hardware for other purposes. These features make test automation development and debugging fast and easy.

# 4

## View of MAP Console Program

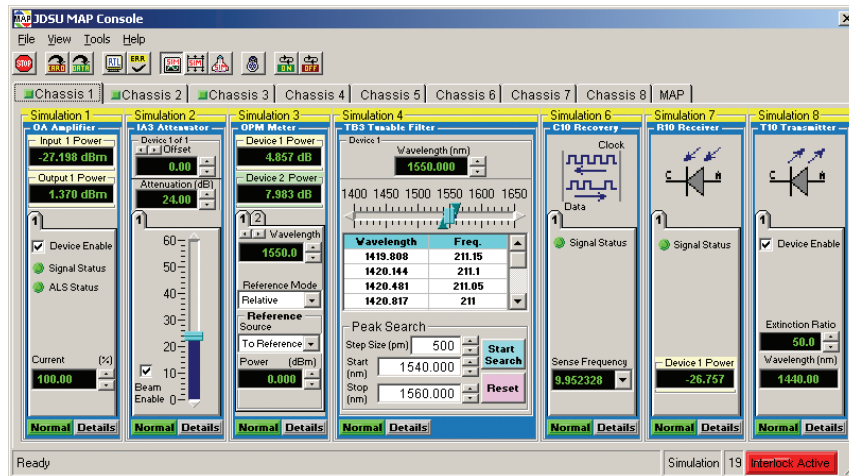

## Typical LabVIEW Implementation of the ActiveX Drivers

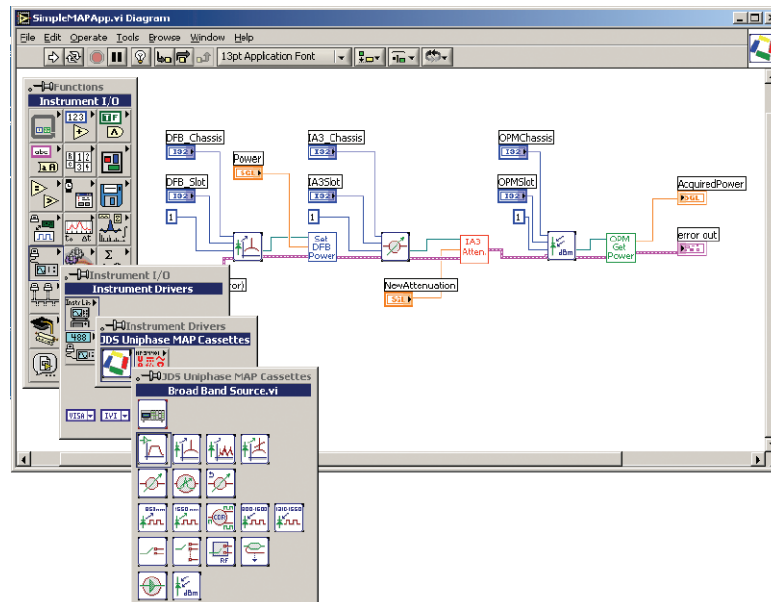

# 5

## Specifications

| Parameter                  | MAP Master                                                    | MAP Benchtop                                                |
|----------------------------|---------------------------------------------------------------|-------------------------------------------------------------|
| Capacity                   | 8 single-slot cassettes/chassis                               | 3 single-slot cassettes/chassis                             |
| Power                      | 100 to 125 V AC / 200 to 240 V AC, 50/60 Hz Field-replaceable | 100 to 125 V AC 200 to 240 V AC, 50/60 Hz                   |
| Power consumption          | 200 V A                                                       | 200 V A                                                     |
| Mounting                   | Rackmount Benchtop (front, center, or rear)                   | Rackmount Benchtop (front)                                  |
| Rackmount kit              | Included                                                      | Optional (MAP+2A10)                                         |
| Display LCD color          | VGA                                                           | VGA                                                         |
| Display dimensions (H x W) | 7 x 5 cm                                                      | 7 x 5 cm                                                    |
| Resolution                 | 640 x 234 pixels                                              | 640 x 234 pixels                                            |
| Remote interface           | RS-232, GPIB                                                  | RS-232, GPIB                                                |
| External keyboard          | N/A                                                           | USB Keyboard                                                |
| Video output               | N/A                                                           | VGA                                                         |
| Video input                | N/A                                                           | BNC Connector (NTSC)                                        |
| VGA output                 | N/A                                                           | 15-pin D-sub connector                                      |
| Safety interlock           | Fail-safe hardware-controlled                                 |                                                             |
| Operating temperature      | 0 to 50 °C                                                    |                                                             |
| Storage temperature        | -30 to 60 °C                                                  |                                                             |
| Humidity                   | < 80% RH, 0 to 40 °C non-condensing                           |                                                             |
| Dimensions (W x H x D)     | 44.91 x 13.24 x 52.37 cm (3U high, standard 19-inch width)    | 22.5 x 14.8 x 43.0 cm (3U high, standard 1/2 19-inch width) |
| Weight                     | 14.3 kg                                                       | 8.6 kg                                                      |

## Ordering Information

For more information on this or other products and their availability, please contact your local JDSU account manager or JDSU directly at 1-800-498-JDSU (5378) in North America and +800-5378-JDSU worldwide or via e-mail at [customer.service@jdsu.com](mailto:customer.service@jdsu.com).

### MAP Master Chassis (MAP+2M00)

| Product Code | Description                        |
|--------------|------------------------------------|
| MAP+2A01     | MAP 19-inch Chassis                |
| MAP+2A02     | MAP Power Supply Module            |
| MAP+2M01     | MAP Master Main Control Module     |
| MAP+2M02     | MAP Master Local Interface Module  |
| MAP+2M03     | MAP Master Remote Interface Module |
| MAP+2A03     | MAP Rackmount Kit                  |
| MAP+2A06     | MAP Cassette Blanking Plates (8)   |
| MAP+2A04     | MAP Safety Interlock Key           |
| MAP+2A09     | MAP Software and Documentation CD  |
| 10108925     | MAP User's Manual                  |
| 21057090     | MAP Programming Guide              |

### MAP Benchtop (MAP+2B00)

| Product Code | Description                       |
|--------------|-----------------------------------|
| MAP+2A04     | MAP Safety Interlock Key          |
| MAP+2A06     | MAP Cassette Blanking Plates (3)  |
| MAP+2A09     | MAP Software and Documentation CD |
| 10108925     | MAP User's Manual                 |
| 21057090     | MAP Programming Guide             |

#### Option

|          |                                |
|----------|--------------------------------|
| MAP+2A10 | Optional 19-inch rackmount kit |
|----------|--------------------------------|

ActiveX and Visual Basic are registered trademarks of Microsoft Corporation.  
 LabVIEW is a registered trademark of National Instruments Corporation.  
 TestPoint is a registered trademark of Keithley Instruments, Inc.  
 UL is a registered trademark of Underwriters Laboratories Inc.

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. ©2007 JDS Uniphase Corporation. All rights reserved. 10116396 Rev. 010 01/07 MAP.TM.AE

## Test & Measurement Regional Sales

| NORTH AMERICA                               | LATIN AMERICA                                  | ASIA PACIFIC                               | EMEA                                           | WEBSITE: <a href="http://www.jdsu.com">www.jdsu.com</a> |
|---------------------------------------------|------------------------------------------------|--------------------------------------------|------------------------------------------------|---------------------------------------------------------|
| TEL: 1 866 228 3762<br>FAX: +1 301 353 9216 | TEL: +55 11 5503 3800<br>FAX: +55 11 5505 1598 | TEL: +852 2892 0990<br>FAX: +852 2892 0770 | TEL: +49 7121 86 2222<br>FAX: +49 7121 86 1222 |                                                         |



# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisan<sup>tg</sup>.com](https://www.artisantg.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisan<sup>tg</sup>.com](mailto:sales@artisan<sup>tg</sup>.com) | [artisan<sup>tg</sup>.com](https://www.artisantg.com)

