



Artisan Scientific

QUALITY INSTRUMENTATION ... GUARANTEED

Looking for more information?

Visit us on the web at <http://www.artisan-scientific.com> for more information:

- Price Quotations
- Drivers
- Technical Specifications, Manuals and Documentation

Artisan Scientific is Your Source for Quality New and Certified-Used/Pre-owned Equipment

- Tens of Thousands of In-Stock Items
- Hundreds of Manufacturers Supported
- Fast Shipping and Delivery
- Leasing / Monthly Rentals
- Equipment Demos
- Consignment

Service Center Repairs

Experienced Engineers and Technicians on staff in our State-of-the-art Full-Service In-House Service Center Facility

InstraView™ Remote Inspection

Remotely inspect equipment before purchasing with our Innovative InstraView™ website at <http://www.instraview.com>

We buy used equipment! We also offer credit for Buy-Backs and Trade-Ins

Sell your excess, underutilized, and idle used equipment. Contact one of our Customer Service Representatives today!

Talk to a live person: 888-88-SOURCE (888-887-6872) | Contact us by email: sales@artisan-scientific.com | Visit our website: <http://www.artisan-scientific.com>



PMC-Dual100BT

Dual Fast Ethernet
PMC

User Manual

**PMC-Dual100BT
Dual Fast Ethernet PMC**

**SBS Technologies, Inc.
1284 Corporate Center Drive
St. Paul, MN 55121-1245
Tel: (651) 905-4700
FAX: (651) 905-4701
Email: support.commercial@sbs.com
<http://www.sbs.com>**

©1999, 2002, 2005 SBS Technologies Inc.
IndustryPack and PC•MIP are a registered trademarks of SBS Technologies, Inc and MEN Mikro GmbH. QuickPack, SDpack and Unilin are trademarks SBS Technologies, Inc.

SBS Technologies, Inc acknowledges the trademarks of other organizations for their respective products mentioned in this document.

All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without the express consent of SBS Technologies. This document is meant solely for the purpose in which it was delivered.

SBS Technologies reserves the right to make any changes in the devices or device specifications contained herein at any time and without notice. Customers are advised to verify all information contained in this document.

The electronic equipment described herein generates, uses and may radiate radio frequency energy, which can cause radio interference. SBS Technologies assumes no liability for any damages caused by such interference.

SBS Technologies' products are **not** authorized for use as critical components in medical applications such as life support equipment, without the express consent of the General Manager of SBS Technologies, Inc. Commercial Group.

This product has been designed to operate with IndustryPack, PC•MIP or PMC modules or carriers and compatible user-provided equipment. Connection of incompatible hardware is likely to cause serious damage. SBS Technologies assumes no liability for any damages caused by such incompatibility.

Table of Contents

PRODUCT DESCRIPTION	1
KEY FEATURES	1
BLOCK DIAGRAM	2
SOFTWARE DRIVERS	3
PROGRAMMING	4
PMC/PCI INTERFACE	4
SECONDARY PCI BUS	6
MAC ADDRESSES.....	6
CONNECTORS AND INDICATORS	7
FRONT PANEL RJ-45 PIN ASSIGNMENT.....	8
FRONT PANEL LED INDICATORS	8
REAR PANEL ETHERNET PIN ASSIGNMENT	9
PMC P1 CONNECTOR PIN ASSIGNMENT	10
<i>PMC P2 Connector Pin Assignment</i>	11
SPECIFICATIONS	12
REPAIR	13
SERVICE POLICY.....	13

List of Figures

FIGURE 1: BLOCK DIAGRAM (-FP FRONT PANEL OPTION)	2
FIGURE 2: PCI CONFIGURATION REGISTERS FOR 82558	4
FIGURE 3: PCI CONFIGURATION REGISTERS FOR PCI-PCI BRIDGE	5
FIGURE 4: DEVICE AND INTERRUPT ASSIGNMENT FOR ETHERNET PORTS	6
FIGURE 5: PMC-DUAL100BT PLACEMENT DIAGRAM	7
FIGURE 6: PMC-DUAL100BT FRONT PANEL DIAGRAM	7
FIGURE 7: FRONT PANEL I/O PIN ASSIGNMENT	8
FIGURE 8: LED STATUS DEFINITIONS	8
FIGURE 9: REAR PANEL I/O PIN ASSIGNMENT	9
FIGURE 10: PMC P1 CONNECTOR PCI PIN ASSIGNMENT	10
FIGURE 11: PCI P2 CONNECTOR PCI PIN ASSIGNMENT	11

Product Description

The PMC-Dual100BT provides two independent high-performance Fast Ethernet interface controller ports on a single-wide PCI Mezzanine Card (PMC). The Ethernet network interface complies with the IEEE 802.3 for 10BaseT and 100BaseTX. Both full-duplex and half-duplex modes are supported.

The PMC-Dual100BT includes 3 Kbytes of transmit and 3 Kbytes of receive FIFO, allowing back-to-back transmission with minimal interface latency. It also features a 10BaseT and 100BaseTX auto-detection CSMA/CD interface controller.

The physical interface is supported via the built-in Physical Layer Interface Unit in the Ethernet controller. It supports a number of sophisticated features, including auto negotiation, collision detection, link detection, Manchester encoding/decoding (10BaseT), 4B/5B encoding/decoding (100BaseTX), and scrambling/descrambling (100BaseTX). I/O is via two front panel RJ45 connectors.

Key Features

- Two 10BaseT/100BaseTX Ethernet ports
- Front panel I/O via RJ45 (-FP option)
- Rear-panel I/O via PCI J4 (-BP option)
- Single-wide PMC form factor
- Auto-negotiating protocol selection
- Two 3 Kbyte FIFOs

Block Diagram

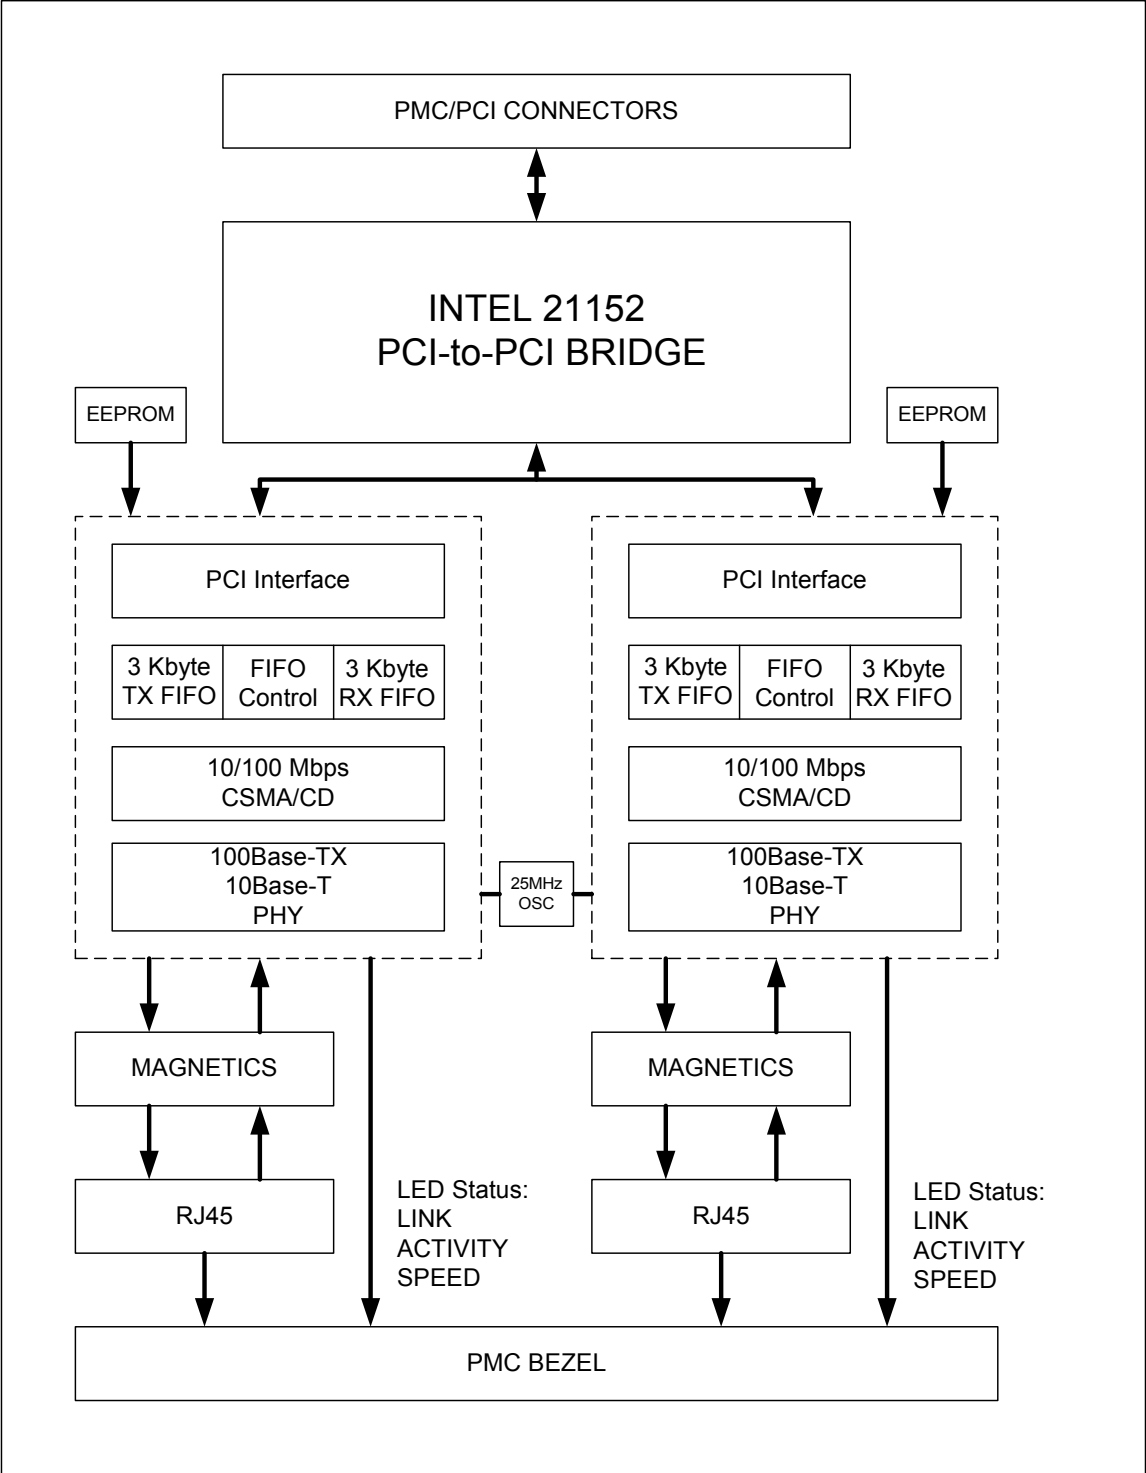


Figure 1: Block Diagram (-FP front panel option)

Software Drivers

A VxWorks 5.3 driver (if_feio.o) is compatible with this product and is available from Wind River Systems (<http://www.wrs.com>) as part of Tornado.

A Windows NT 4.0 driver compatible with this product is available from Intel (<http://www.intel.com>). Driver revision 3.1 for the Intel Pro/100T network card has been verified to work with this product.

Programming

PMC/PCI Interface

The PMC-Dual100BT is accessed by the host system via a 33 MHz 32-bit PMC interface that is PCI Specification 2.1 compliant. The host accesses a PCI-PCI bridge that drives a secondary PCI bus connected to both 82558 Ethernet chips.

The PCI configuration registers for the two 82558 Ethernet chips on the PMC-Dual100BT are listed below in Figure 2

31	16	15	0	Addr
Device ID = 1229h		Vendor ID = 8086h		00h
Status		Command		04h
Class Code			Revision ID = 05h	08h
BIST	Header Type	Latency Timer	Cache Line Size	0Ch
CSR Memory Mapped Base Address Register				10h
CSR I/O Mapped Base Address Register				14h
Flash Memory Mapped Base Address Register				18h
Reserved Base Address Register				1Ch
Reserved Base Address Register				20h
Reserved Base Address Register				24h
Reserved				28h
Subsystem ID = 0009h		Subsystem Vendor ID = 8086h		2Ch
Expansion ROM Base Address Register				30h
Reserved			Cap_Ptr	34h
Reserved				38h
Max_Lat	Min_Gnt	Interrupt Pin	Interrupt Line	3Ch

Figure 2: PCI Configuration Registers for 82558

The following table displays the PCI configuration information for the bridge chip.

31	16	15	0	Addr
Device ID = 0024h		Vendor ID = 1011h		00h
Status		Command		04h
Class Code			Revision ID = 05h	08h
Reserved	Header Type	Primary Latency Timer	Cache Line Size	0Ch
Reserved				10h
Reserved				14h
Secondary Latency Timer	Subordinate Bus Number	Secondary Bus Number	Primary Bus Number	18h
Secondary Status		I/O Limit Address	I/O Base Address	1Ch
Memory Limit Address		Memory Base Address		20h
Prefetchable Memory Limit Address		Prefetchable Memory Base Address		24h
Prefetchable Memory Base Address Upper 32 Bits				28h
Prefetchable Memory Limit Upper 32 Bits				2Ch
I/O Limit Address Upper 16 Bits		I/O Base Address Upper 16 Bits		30h
Reserved			ECP Pointer	34h
Reserved				38h
Bridge Control		Interrupt Pin	Reserved	3Ch
Arbiter Control		Diagnostic Control	Chip Control	40h
Reserved				44h – 60h
Reserved	Reserved	Reserved		64h
Reserved				68h
Reserved				6Ch – DBh
Power Management Capabilities		Next Item Ptr	Capability ID	70h
Data	PMCSR Bridge Support Extensions	Power Management CSR		74h
Reserved				E4h – FFh

Figure 3: PCI Configuration Registers for PCI-PCI Bridge

Secondary PCI Bus

The following table shows how the two Ethernet chips are configured on the secondary PCI bridge.

Ethernet Port	Device Number on Secondary PCI Bus	Interrupt Pin on Primary PCI Bus
1	0	INTA#
2	1	INTB#

Figure 4: Device and Interrupt Assignment for Ethernet Ports

MAC Addresses

Unique Ethernet addresses are assigned to the two Ethernet ports at the factory. For convenience, the two addresses are shown on human- and machine-readable labels affixed to the backside of the board.

Connectors and Indicators

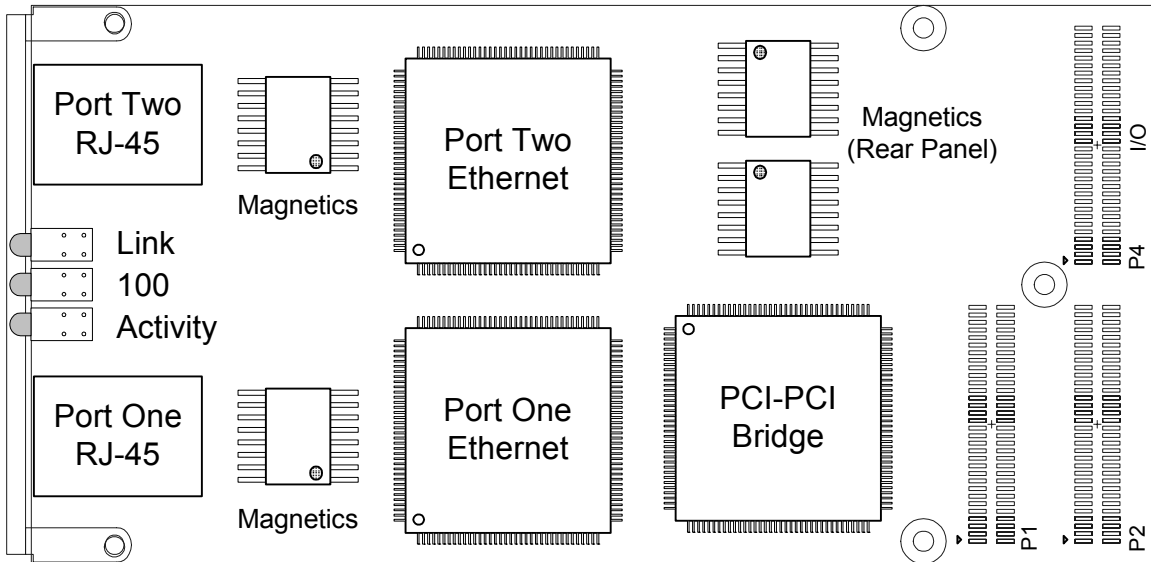


Figure 5: PMC-Dual100BT Placement Diagram

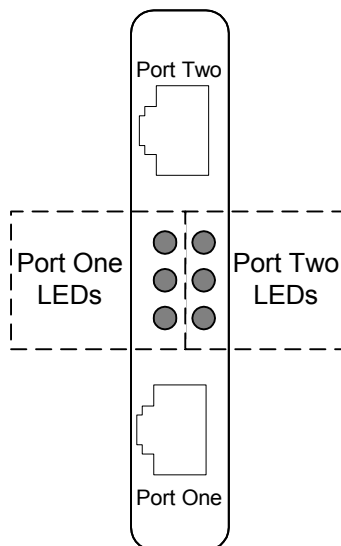


Figure 6: PMC-Dual100BT Front Panel Diagram

Front Panel RJ45 Pin Assignment

The front panel order option (-FP) provides two RJ45 connectors on the PMC front panel with pin assignments as shown in Figure 7. The port number for each of the two RJ45 connectors is labeled on both the front and the back of the board. Figure 6 above shows the location of the two port connectors.

RJ45 Pin #	Signal
1	TX+
2	TX-
3	RX+
4	Not Used
5	Not Used
6	RX-
7	Not Used
8	Not Used

Figure 7: Front Panel I/O Pin Assignment

Front Panel LED Indicators

Each Ethernet port provides three LED status indicators. The LED functions are shown in the table below:

NAME	SIGNAL	Description
ACT	Activity	Indicates either transmit or receive activity. When there is activity, the LED is on. When there is no activity, the LED is off
LINK	Link Integrity	Indicates link integrity. If link is good in either 10 or 100 Mbps mode the LED is on, if link is bad the LED is off.
100	Speed	This LED is on if the data rate is 100 Mbps and off at 10Mbps. The LED retains its last known state when the link is down

Figure 8: LED Status Definitions

Rear Panel Ethernet Pin Assignment

PMC-Dual100BT-BP has rear panel Ethernet access. For this order option, front panel Ethernet access is not available. Rear panel connections to the Ethernet interface on the PMC-Dual100BT are made via the 64-pin PMC P4 connector with pin assignments as shown in Figure 9.

P4 Pin Number	Signal Name	P4 Pin Number	Signal Name
1	n/c	2	n/c
3	n/c	4	n/c
5	n/c	6	n/c
7	n/c	8	n/c
9	n/c	10	n/c
11	n/c	12	n/c
13	n/c	14	n/c
15	n/c	16	n/c
17	n/c	18	n/c
19	n/c	20	n/c
21	n/c	22	n/c
23	Port 1 common	24	Port 1 common
25	Port 1 TX+	26	Port 1 RX+
27	Port 1 common	28	Port 1 common
29	Port 1 TX-	30	Port 1 RX-
31	n/c	32	NC
33	Port 2 common	34	Port 2 common
35	Port 2 TX+	36	Port 2 RX+
37	Port 2 common	38	Port 2 common
39	Port 2 TX-	40	Port 2 RX-
41	n/c	42	n/c
43	n/c	44	n/c
45	n/c	46	n/c
47	n/c	48	n/c
49	n/c	50	n/c
51	n/c	52	n/c
53	n/c	54	n/c
55	n/c	56	n/c
57	n/c	58	n/c
59	n/c	60	n/c
61	n/c	62	n/c
63	n/c	64	n/c

Figure 9: Rear Panel I/O Pin Assignment

PMC P1 Connector Pin Assignment

Pin #	Signal Name	Signal Name	Pin #
1 (N/C)	TCK	-12V	2 (BP)
3	Ground	INTA#	4
5	INTB#	INTC#	6 (N/C)
7	BUSMODEI#	+5V	8
9 (N/C)	INTD#	PCI-RSVD	10 (N/C)
11	Ground	PCI-RSVD	12 (N/C)
13	CLK	Ground	14
15	Ground	GNT#	16
17	REQ#	+5V	18
19 (BP)	V (I/O)	AD[31]	20
21	AD[28]	AD [27]	22
23	AD[25]	Ground	24
25	Ground	C/BE[3]#	26
27	AD[22]	AD[21]	28
29	AD[19]	+5V	30
31 (BP)	V (I/O)	AD[17]	32
33	FRAME#	Ground	34
35	Ground	IRDY#	36
37	DEVSEL#	+5V	38
39	Ground	LOCK#	40
41 (N/C)	SDONE#	SBO#	42 (N/C)
43	PAR	Ground	44
45 (BP)	V (I/O)	AD[15]	46
47	AD[12]	AD[11]	48
49	AD[09]	+5V	50
51	Ground	C/BE[0]#	52
53	AD[06]	AD[05]	54
55	AD[04]	Ground	56
57 (BP)	V (I/O)	AD[03]	58
59	AD[02]	AD[01]	60
61	AD[00]	+5V	62
63	Ground	REQ64#	64 (N/C)

Figure 10: PMC P1 Connector PCI Pin Assignment

N/C = Not Connected, BP = Bypass only

PMC P2 Connector Pin Assignment

Pin #	Signal Name	Signal Name	Pin #
1 (BP)	+12V	TRST#	2 (N/C)
3 (N/C)	TMS	TDO	4
5	TDI	Ground	6
7	Ground	PCI-RSVD	8 (N/C)
9 (N/C)	PCI-RSVD	PCI-RSVD	10 (N/C)
11 (N/C)	BUSMODE2#	+3.3V	12 (BP)
13	RST#	BUSMODE3#	14
15 (BP)	3.3V	BUSMODE4#	16
17 (N/C)	PCI-RSVD	Ground	18
19	AD[30],	AD[29]	20
21	Ground	AD[26]	22
23	AD[24]	+3.3V	24 (BP)
25	IDSEL	AD[23]	26
27 (BP)	+3.3V	AD[20]	28
29	AD[18]	Ground	30
31	AD[16]	C/BE[2]#	32
33	Ground	PMC-RSVD	34 (N/C)
35	TRDY#	+3.3V	36 (BP)
37	Ground	STOP#	38
39	PERR#	Ground	40
41 (BP)	+3.3V	SERR#	42
43	C/BE[1]#	Ground	44
45	AD[14]	AD[13]	46
47	Ground	AD[10]	48
49	AD[08]	+3.3V	50 (BP)
51	AD[07]	PMC-RSVD	52 (N/C)
53 (BP)	+3.3V	PMC-RSVD	54 (N/C)
55 (N/C)	PMC-RSVD	Ground	56
57 (N/C)	PMC-RSVD	PMC-RSVD	58 (N/C)
59	Ground	PMC-RSVD	60 (N/C)
61 (N/C)	ACK64#	+3.3V	62 (BP)
63	Ground	PMC-RSVD	64 (N/C)

Figure 11: PCI P2 Connector PCI Pin Assignment

N/C = Not Connected, BP = Bypass only

Specifications

Form Factor	Singlewide PMC
PMC Conformance	32-bit PMC Specification IEEE P1386.1
PCI Interface	32-bit, 33 MHz master and slave PCI Specification, Revision 2.1
PCI Controller	Intel 21152
Number of Ports	Two, independent
Ethernet Controllers	Intel 82558
Protocols	Ethernet 10BaseT, 100BaseTx
Receive/Transmit FIFOs	3 Kbytes each
Front Panel I/O Access	Two RJ45 (-FP option)
Rear Panel Panel I/O Access	PMC P4 (-BP option)
Indicators	Speed, activity, link
Dimensions	75.0 mm x 150.0 mm
Weight	0.09 kg (0.2 lb)
Power Requirements	+5 VDC, 1000 mA typ
Environmental	Operating temperature: 0° to +70° C Humidity: 5% to 95% non-condensing Storage: -40° to +85° C

Repair

Service Policy

Before returning a product for repair, verify as well as possible that the suspected unit is at fault. Then call the Customer Service Department for a RETURN MATERIAL AUTHORIZATION (RMA) number. Carefully package the unit, in the original shipping carton if this is available, and ship prepaid and insured with the RMA number clearly written on the outside of the package. Include a return address and the telephone number of a technical contact. For out-of-warranty repairs, a purchase order for repair charges must accompany the return. SBS Technologies will not be responsible for damages due to improper packaging of returned items. For service of SBS Technologies products not purchased directly from SBS Technologies, contact your reseller. Products returned to SBS Technologies for repair by other than the original customer will be treated as out-of-warranty.

For service, contact:

SBS Technologies, Inc.
1284 Corporate Center Drive
St. Paul, MN 55121-1245
Tel: (651) 905-4700
FAX: (651) 905-4701
Email: support.commercial@sbs.com



Artisan Scientific

QUALITY INSTRUMENTATION ... GUARANTEED

Looking for more information?

Visit us on the web at <http://www.artisan-scientific.com> for more information:

- Price Quotations
- Drivers
- Technical Specifications, Manuals and Documentation

Artisan Scientific is Your Source for Quality New and Certified-Used/Pre-owned Equipment

- Tens of Thousands of In-Stock Items
- Hundreds of Manufacturers Supported
- Fast Shipping and Delivery
- Leasing / Monthly Rentals
- Equipment Demos
- Consignment

Service Center Repairs

Experienced Engineers and Technicians on staff in our State-of-the-art Full-Service In-House Service Center Facility

InstraView™ Remote Inspection

Remotely inspect equipment before purchasing with our Innovative InstraView™ website at <http://www.instraview.com>

We buy used equipment! We also offer credit for Buy-Backs and Trade-Ins

Sell your excess, underutilized, and idle used equipment. Contact one of our Customer Service Representatives today!

Talk to a live person: 888-88-SOURCE (888-887-6872) | Contact us by email: sales@artisan-scientific.com | Visit our website: <http://www.artisan-scientific.com>