

ST Engineering iDirect iConnex E800
Satellite Router Board



In Stock

Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/67048-6>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.



Hawkeye™ III Series

Multiband VSAT Terminals



GCS

The Hawkeye™ III VSAT System

Common Architecture

The latest generation Hawkeye™ VSAT, the Hawkeye™ III, now gives the user the ability to switch between bands and apertures without having to purchase an additional system. The Hawkeye™ III terminals range in antenna size from 1.2M to 2.4M and utilize an enhanced ODU to eliminate reconfiguration and allow commonality of control. A simple swap of the feed boom assembly is all that is required to switch between bands. The Hawkeye™ series VSATs are proven reliable, lightweight and now even easier to use!

System Features

- Enhanced ODU
- Segmented carbon fiber reflector offers high performance and light weight
- Robust auto-acquisition to support Ku-, X-, Ka-, and C-Bands
- Interchangeable Feed Boom design allows for easy RF Band change
- Interchangeable reflector design allows user to switch easily between aperture sizes
- 4 LAN ports or 3 LAN ports plus DSL option
- MIL-STD-810G tested
- Type-approved for Global Xpress



Enhanced ODU

- MIL-STD-810G tested
- Rugged design for outdoor usage
- Embedded iDirect Evolution® iConnex e800 modem with DVB-S2/ACM
- Embedded Ethernet switch
- 4 LAN ports
- DSL port option



Common GCS ViewSAT™ GUI across all platforms

ViewSAT™ is specifically designed to monitor and control the Hawkeye™ and Cheetah™ series of VSAT terminals. The monitor and control is provided for the embedded iDirect modem, Antenna controller and some select BUC/SSPAs.

Frequency Bands and Availability:

Band	Receive (GHz)	Transmit (GHz)	Feed	1.2M	1.6M	2.0M	2.4M
C	3.625 to 4.20	5.85 to 6.425	Cir or Lin	N	N	Y	Y
X	7.25 to 7.75	7.90 to 8.40	Cir	Y	Y	Y	Y
Ku	10.95 to 12.75	13.75 to 14.50	Lin	Y	Y	Y	Y
Ka	20.2 to 21.2	30.0 to 31.0	Cir	Y	Y	Y	Y

G/T and EIRP:

	G/T (dB/K)				EIRP			
	C-Band	X-Band	Ku-Band	Ka-Band	C-Band	X-Band	Ku-Band	Ka-Band
1.2M	-	16.3	20.5	23.0	-	53.9	40W: 58.2	60.9
1.6M	-	18.2	22.2	25.2	-	57.3	40W: 60.3	66.0
2.0M	17.0	20.1	24.6	27.1	55.8	59.2	40W: 62.3	67.9
2.4M	18.6	21.7	26.2	28.7	57.3	60.8	40W: 63.8	69.5

Note 1: G/T at mid-band frequency and 20 degrees elevation.

Note 2: For 1.6M, 2.0M and 2.4M systems, EIRP assumes standard 40W: C band, 60W: X band, 50W: Ka- Band

Note 3: For 1.2M EIRP assumes 40W: for X-Band, 20W: for Ka-Band.

Note 4: For ARSTRAT certified X-Band systems, EIRP may vary.



Hawkeye™ III Lite 1.2M System


2 cases: X-, Ku- or Ka- configuration
Each case < 100 lb.

- One button auto-acquisition
- ViewSAT™ terminal monitor and control software package
- X- & Ka-Band terminals are ARSTRAT-certified

Hawkeye™ III 1.6M System

6 cases: X-, Ku- or Ka- configuration
Each case < 175 lb.

- One button auto-acquisition
- ViewSAT™ terminal monitor and control software package
- X- & Ka-Band terminals are ARSTRAT-certified

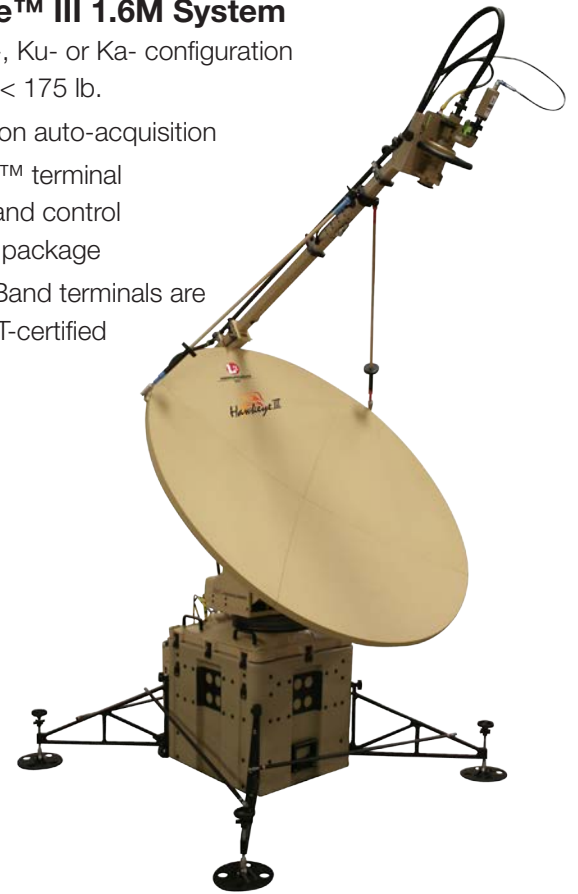

Hawkeye™ III 2.0M System

7 cases: X-, Ku- or Ka- configuration
8 cases: C- configuration
Each case < 175 lb.

- One button auto-acquisition
- ViewSAT™ terminal monitor and control software package
- X- & Ka-Band terminals are ARSTRAT-certified



Case quantities are based on original system configuration.

Hawkeye™ III 2.4M System

7 cases: X-, Ku- or Ka- configuration
8 cases: C- configuration
Each case < 175 lb.


- One button auto-acquisition
- ViewSAT™ terminal monitor and control software package
- X- & Ka-Band terminals are ARSTRAT-certified





System Specifications

AC Power	90-264 VAC, 47 - 440 Hz, Power Factor corrected
Operational Temperature	-32 °C to +50 °C
Storage Temperature	-40 °C to +60 °C
Wind (Operational)	30 MPH gusting to 45 MPH (with anchors)
Feed	Offset, Prime Focus, 0.8 F/D (0.83 F/D on 2.4M); 0.6 F/D on 1.2M
Reflector	Segmented Carbon Fiber
Az/EI/Pol Drive System	Patented Roto-Lok elevation over azimuth with motorized linear feed
Controller	DVB Reference Satellite or iDirect SNR tuning. One button fully automatic satellite acquisition (all 3 axis) using GPS, compass, and level sensor inputs.
Accuracy	< ± 0.1° All axis
Data Interface	10/100 BT Ethernet (CAT-5) 4 ports. 10/100 BT Ethernet (CAT 5) 3 ports plus 1 DSL Port. (optional)
Modem Options	Embedded iDirect Evolution® iConnex e800 modem. (L-Band Interface for external modem located on pedestal)
Tracking	Optional Beacon Receiver and software. (N/A on 1.2M)

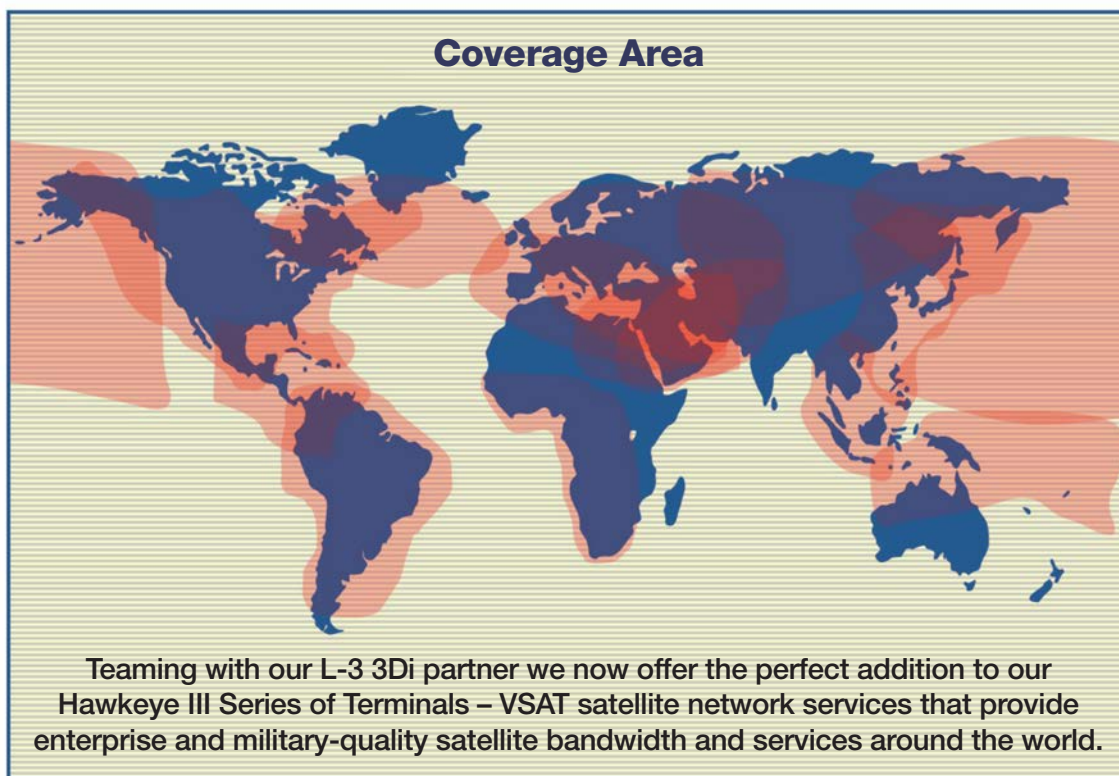

GCS

Headquarters: L-3 GCS
7640 Omnitel Place • Victor, NY 14564 USA
Website: www.L-3com.com/GCS
Email: GCS.information@L-3com.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanng.com | [artisanng.com](https://www.artisanng.com)

