

In Stock

Used and in Excellent Condition

Open Web Page

https://www.artisantg.com/49034-3

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- · Full-service, independent repair center

ARTISAN'
TECHNOLOGY CROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisantg.com | artisantg.com

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

PXI - 1025 MegaPAC

Compact Size

Rugged Dual-Chassis Structure

10.4 Active Matrix LCD

Filtered Forced-Air Cooling

8 Peripheral Slots for 3U PXI



Operating Shock 30g 11ms 1/2 sine

Operating Vibration 5 - 500Hz 0.3g

Operating Non-Condensing Humidity 10 - 90%

RUGGED, PORTABLE CHASSIS FOR PXI

Overview

The PXI-1025 MegaPAC is the first portable PXI computer platform designed with the utility, ruggedness, modularity, and expandability needed for demanding test and measurement, instrumentation, and communications applications. With eight expansion slots and 350W peak power, the fully self-contained PXI-1025 constitutes a complete high-per-formance measurement and automation system in a compact package. The PXI-1025 was jointly developed by National Instruments and Dolch Computer Systems.

Fully Self-Contained

The PXI-1025 MegaPAC was designed with the mobile technical professional in mind. This rugged chassis features a SVGA 10.4 in. active matrix LCD color display, fold down/removable keyboard, and a carrying handle/tilt stand.

Power Supply

The PXI-1025 comes with a 350W universal AC power supply. Use an external DC to AC power inverter for applications where only DC power is available.

Active Cooling

The PXI-1025 cooling system has a temperature sensor that controls the speed of its high-capacity fans to maintain proper internal temperature. Because of its sophisticated cooling system, the PXI-1025 can operate in ambient temperatures of 0° to 50 °C. In addition, when the ambient temperature is moderate, a "quiet" mode slows the fans, to reduce unnecessary noise.

Crash-Cart Ruggedness

The MegaPAC design incorporates a unique dual-chassis structure that "floats" the inner structure from the external chassis using an eight-point IsoGuard shock-isolating matrix. With this technique, harmful shock and vibration energy is absorbed before it can affect the internal components or PXI modules. Overtravel snubbers are mounted between the two chassis in case of transit drops or severe impact.

Installation

The PXI-1025 is an ideal chassis for portable applications. It comes with a carrying handle that doubles as a bench-top rest to tilt the chassis. It also contains mounting points which can be used for custom mounting configurations.



Operation in Standing Position

North America

Corporate Headquarters

3178 Laurelview Court Fremont, CA 94538 Tel: 800.995.7560 Fax: 510.490.2487 E-mail: sales.usa@dolch.com Web Site: www.dolch.com

San Diego, CA

Tel: 760.723.7900 Fax: 760.723.7910

E-mail: touchsales@dolch.com

Cleveland, OH

Tel: 440.350.9989 Fax: 440.350.1445 E-mail: sales.usa@dolch.com

Baltimore, MD

Tel: 410.384.1651 Fax: 410.384.1652 E-mail: sales.usa@dolch.com

Canada

Tel: 905.795.1544 Fax: 905.795.1548 E-mail: sales.ca@dolch.com

Europe

Germany

Tel: +49.89.608.6860 Fax: +49.89.608.6880 E-mail: sales.de@dolch.com

United Kingdom

Tel: +44.1908.263.622 Fax: +44.1908.263.220 E-mail: sales.uk@dolch.com

France

Tel: +33.1.39.30.44.50 Fax: +33.1.39.30.44.59 E-mail: sales.fr@dolch.com





RUGGED SOLUTIONS

Specifications

SpecificationsComplies with PXI specification

Accepts modules compliant with CompactPCI, PICMG 2.0 specification

Peripherals / User Interface

Display Type 10.4in color TFT, SVGA 800X600

Pointing Device Pointing Stick Style, Integrated with Keyboard, 2 buttons

CD-ROM 24X Max

Keyboard 85 Key, Notebook Style Electrical

Input Voltage 90 to 265 VAC Universal 11 to 30 VDC (Optional)

Input Frequency 50 to 60Hz

Output

Safety

EMC/EMI

Electrical Emissions


Maximum Usable Power 350W

Cooling	
Fans	1 at 87cfm, 1 at 51cfm, with Filters
Physical	
Number of PXI Slots	8 (1 Controller, 7 Peripheral)
Dimensions	16 X 18.1 X 8.4in (40.7 X 40 X 21.3cm)
Weight	25lbs (11.4kg)
	Mean Time Between Failures (MTBF)
MTBF	17,000 hours (Prediction Performed in Accordance with Belcore Methods)
Operating Environment	
Ambient Temperature	0° to 50°C (Meets IEC 60068-2-1 and IEC 60068-2-2)
Relative Humidity	10 to 90% Non-Condensing (Meets IEC 60068-2-56)
Storage Environment	
Ambient Tempature	-20° to 70°C (Meets IEC 60068-2-1 and IEC 60068-2-2)
Relative Humidity	5 to 99% Non-Condensing (Meets IEC 60068-2-56)
Backplane	
Bare-Board Material	UL 94V-0 Rated
Connector	Conforms to IEC-917 and IEC 1076-4-101, UL 94V-0 Rated
Shock and Vibration	
Functional Shock	30g 11ms 1/2 Sine (Meets IEC 60068-2-27 Test Profile Developed in
	Accordance with MIL-T-28800E)
Random Vibration	Operating – 5 to 500Hz, 0.3g
	Non-Operating – 10 to 500Hz, 2.4 g (Meets IEC 60068-2-64
	Nonoperating Test Profile Developed in Accordance with MIL-T-28800E and
	MIL-STD-810E Method 514)
Safety and EMC/EMI Compliance	

EN 61010-1:1993

CE, C-Tick and FCC Part 15

EN 55011 Class A at 10m and FCC Part 15 Class A above 1GHz

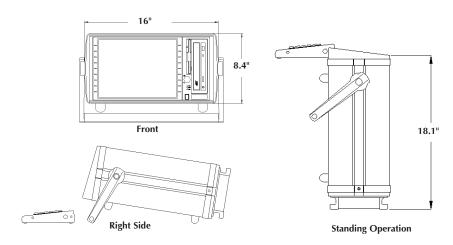

www.dolch.com - 800.995.7560

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at artisantg.com for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today? (217) 352-9330 | sales@artisantg.com | artisantg.com

