

Newport SP143A

Motion Controller Power Supply for Newport

MM4006 / MM4005



© Artisan Technology Group

Limited Availability
Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/54345-49>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

MM4006

Multi-Axis High-Performance Motion Controller/Driver



The MM4006 is a high-performance, integrated Motion controller and driver offering outstanding trajectory accuracy and exceptional programming functionality. It combines simplicity of operation with advanced features to precisely control the most diverse displacement and synchronize them via measurement, command, or external acquisition strings. Supplying 500 W of motor drive power, the MM4006 can simultaneously handle up to eight axes of motion using any combination of Newport's motorized products in DC or stepper motor variants (except PM500 series).

Technology

Designed with upward migration in mind, the MM4006 uses an 80-bit floating point, 133 MHz microprocessor for highest resolution computation. A digital PID-FF (feed-forward) servo loop updates all axes with a cycle time of 300 μ s for precise velocity profile tracking and most

accurate positioning (500 μ s cycle time for 5-8 axes). Smoothest motion is supported by a precision 16-bit DC motor command output. Low-noise PWM amplifiers are performance optimized for each individual stage and contain additional protection circuitry to improve security of your equipment. Each MM4006 is factory configured and tested to ensure highest reliability for your most demanding motion application.

Motion

The MM4006 provides several modes of positioning including synchronized and non-synchronized point-to-point, jogging, linear or circular interpolation. Continuous path contouring is accomplished easily, without the need to be experts in multi-axis command programming. Trajectories, even complex ones, can be simply broken down into straight and curved segments. The controller does the rest, including precise monitoring of the speed and the acceleration all along the trajectory.

Key Features

- 1–8 axes Motion Controller/Driver with 500 W motor drive power
- 80 bit math ensures highest precision trajectory control
- 2D contouring for complex motion profiling
- 4 channel analog input for data and position acquisitions
- Synchronizes external functions with the executed motion
- Extensive command set including variables and loops
- RS-232-C, IEEE-488 or RS-485 interfaces
- User-configurable front panel for interactive control

MANUAL LINEAR
TRANSLATION STAGESMOTORIZED LINEAR
TRANSLATION STAGESMANUAL ROTATION
STAGESMOTORIZED ROTATION
STAGES

FIBER POSITIONERS

ACTUATORS

CONTROLLERS &
AMPLIFIERS

TECHNICAL REFERENCE

This capability is critical for applications like laser-scribing, micro-ablation, or ultra-sonic measurement inspection. In addition, any axis of the MM4006 can be “slaved” to any other axis, even if they have different motor/gearhead ratios or lead screw pitches (electronic gearing). This feature is essential when multiple stages are required to move large or over-sized loads such as in gantry systems.

Inputs/Outputs

The MM4006 also masters exact synchronization with external data capturing tools that can be triggered by position or distance interval. An integrated 4-channel, 12-bit analog input allows for simultaneous data and position acquisition through the MM4006. An optional 4-channel analog output can be used to track motion-related data like position, speed, or following error. An additional parallel TTL I/O port offers 8 lines of inputs and outputs for monitoring, controlling, or synchronizing with external devices such as shutters, lasers, valves, or relays. Valuable examples include stopping a motion or executing an internally stored program dependent on an input bit, or supplying the status of a motion to the output bits. A watchdog timer and remote interlock are incorporated as well for added system safety.

Programming

The MM4006 makes programming complex motions easy using a powerful set of over 150 intuitive, 2 letter commands. 120 variables are available that can be added, negated, multiplied, divided, displayed, or read to build complex motion applications. The 4 soft-keys of the front panel and the display itself can be user-configured for versatile interactive operations. Special commands for

conditional jumps, do-while operations, if/then/else statements, wait-for routines, and tell-status commands are incorporated as well to perform high performance tasks without host PC control. 64kB Flash non-volatile user program memory allows for storing up to 100 user defined programs for computer independent usage.

Other sophisticated capabilities include on-the-fly position, velocity, or trajectory changes for complex motion and alignment routines. Software limits can be set to improve systems safety. A precision origin search routine is provided for precise homing and works with or without encoder index pulse consideration (top zero signal). Backlash and linear error compensation are available to eliminate repeatable system errors.

Computer Interfacing

The MM4006 is available with RS-232-C and IEEE-488 (GPIB) or RS-485 computer interfaces. Basic LabVIEW™ drivers and sample programs and a 32-bit DLL communication for Windows 95/98/NT are provided and get constantly updated through our website at www.newport.com. Additional available MOTION Suite 32 software utilities contain a terminal program and PID tuning software for quick start-up and application development.

Options

The MM4006 options include a large backlit LCD display with 4 user-configurable soft-keys and a programmable status display. An optional 8-axis analog joystick provides manual speed and direction control.

Specifications

Number of Axes	1–8 axes of any combination of stepper and DC motors
Computing Power	300 μ s servo cycle up to 4 axis (500 μ s for 5–8 axis)
	80 Bit, AMD 5X86, 133 MHz processor
	Digital PID servo loop with pre-calculated velocity and acceleration feed forward
Motion	Trapezoidal and s-curve velocity profile
	Synchronized and non-synchronized point-to-point
	Jogging, Continuous moves
	8D Linear interpolation, 2D Circular Interpolation
	Master-slave(s), Electronic gearing on any axis
	On-the-fly changes of target position, speed, acceleration, PID
Contouring	2D Contouring with trajectory pre-check
External Event Synchronization	On-the-fly data acquisition of up to 8 position counters and 4 analog channels per servo cycle (approx. 30 μ s latency per analog channel)
	Trigger output on axis position and distance interval
	Command execution depending on TTL I/O status
Operating Modes	Real-time command execution via computer interfaces
	Stand-alone execution of stored programs
	Front panel manual motion command execution (optional)
	Analog joystick (optional)
Programming	150+ intuitive, 2 letter ASCII commands
	Command set includes: Manipulation of variables, conditional jumps, do-while operations, if/then/else statements, wait-for routines, tell-status commands, front panel key and display programming, user defined units, software limits, home search (with and w/o top zero), backlash compensation, etc.
Software Drivers	Communication DLL for Windows 95/98/NT
	Basic drivers and sample programs for LabView 5.1
	Terminal program and PID tuning software compatible with Windows 95/98/NT
Computer Interfaces	RS-232-C, IEEE-488-1 (optional), RS-485 (optional)
I/O	8 opto-isolated TTL inputs, 8 open-collector TTL outputs
	4 channel 12-bit analog input with programmable ranges: +/-5V, +/-10V, 0-5V or 0-10V
	Optional: 4 channel 12-bit analog output +/-10V
	"Watchdog" timer and remote interlock
Memory	32 kB Flash non-volatile user program memory (last for approx. 3,000 commands)
	Data storage buffer for up to 4000 lines (up to 8 axis position plus 4 analog inputs)
	8 MB Flash non-volatile firmware memory
Front Panel Display (Optional)	Backlit LCD display (240 x 64 res.), 6 lines x 30 characters, Active viewing area: 40 mm x 130 mm, adjustable brightness and contrast
DC Motor Control	Closed-loop operation only
	Precision 16-bit DAC resolution
	25 MHz max. encoder input frequency
Stepper Motor Control	Full- and micro-step capable
	Open- or closed-loop operation
	1 MHz maximum pulse rate
Total Available Motor Power	500 W, for max. power consumption of driven stages (see page 1112)
Power Requirements	90-264 V, 50/60 Hz with PFC (power factor corrector) 100 VA motors off, 570 VA motor on
Dimensions (W x D x H)	19 x 15.6 x 5.28 in. (483 x 395 x 134 mm) + 0.5 in. (12.7 mm) bottom and upper clearance
Weight	8 kg max

MANUAL LINEAR
TRANSLATION STAGESMOTORIZED LINEAR
TRANSLATION STAGESMANUAL ROTATION
STAGESMOTORIZED ROTATION
STAGES

FIBER POSITIONERS

ACTUATORS

CONTROLLERS &
AMPLIFIERS

TECHNICAL REFERENCE

Accessory



An optional analog joystick with 2.9 m cable length provides manual speed and direction control.

Ordering Information: Joystick—RC4006

Ordering Information

The MM4006 is configured by first specifying the driver options for axes 1 to 4 (A1 to A4), followed by options for the chassis configuration (CH), the user manual options (UM), the display options (FP), and the communications interface options (CP). When more than 4 axes are used, a second line reference is needed to specify driver options for axes 5 to 8 (A5 to A8) and a link code (CL). This code links the axis options 5 to 8 to the appropriate options for axis 1 to 4 and avoids any mismatch if several MM4006 controllers are purchased on the same order:

Examples:

For a 2-axis MM4006 controller equipped with drivers 1A & 1H, French documentation, blank front panel and RS-232-C & IEEE-488 interfaces, the reference is:

**MM4006-OPT 1A 1H NN NN 20 0F
0B 01 0N 0N**

First line reference: **MM4006-OPT
A1 A2 A3 A4 CH UM FP EX CL**

Second line reference*: **MM4006-
AX A5 A6 A7 A8 CL**


*only needed if more than 4 axes are used

Also, please refer to the max. motor driver power consumption table (see page 1112) when configuring your system. The total power consumption of all stages must be smaller than the available drive power of the MM4006 (240 W or 500 W) in order to operate all stages simultaneously and at maximum speed.


For a 6-axis MM4006 controller equipped with drivers 1A, 1H, 7G, 64, 01 & 62, English documentation, front panel with display and RS-232-C/RS-485 converter interface:

**MM4006-OPT 1A 1H 7G 64 60 0E
0D 03 0N 01**

MM4006-AX 01 62 NN NN 01

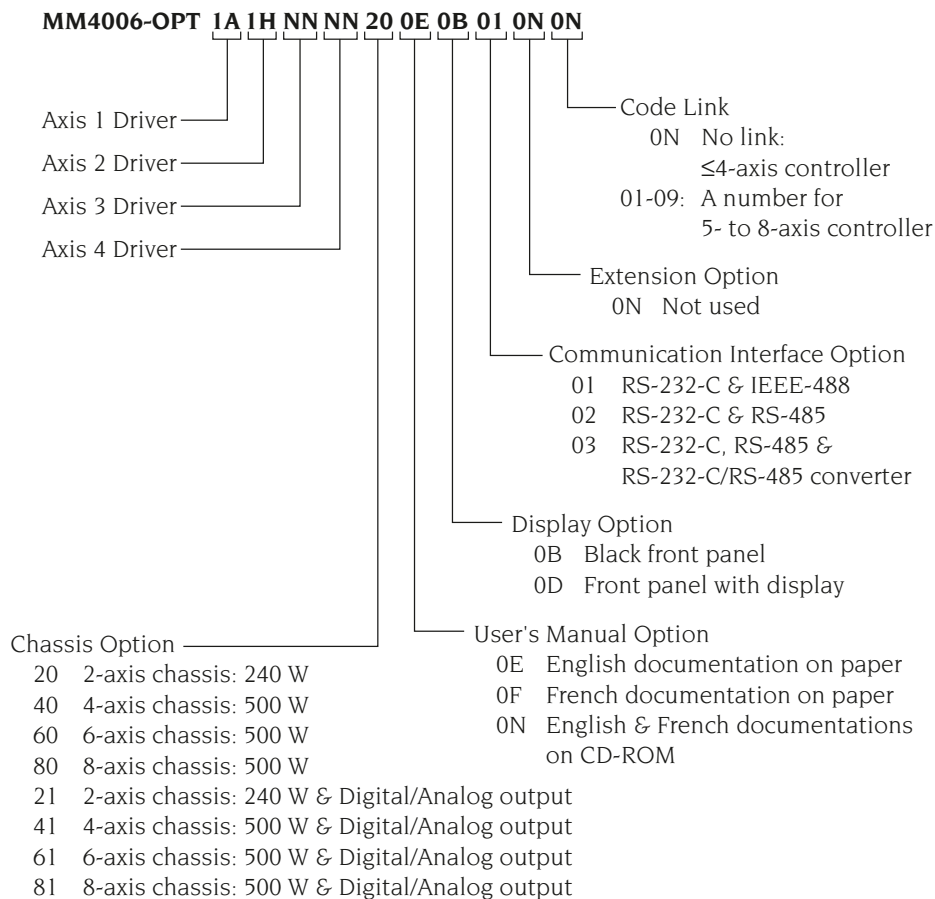

See page 1118 for list of driver options.
Specify NN for all unused axes.

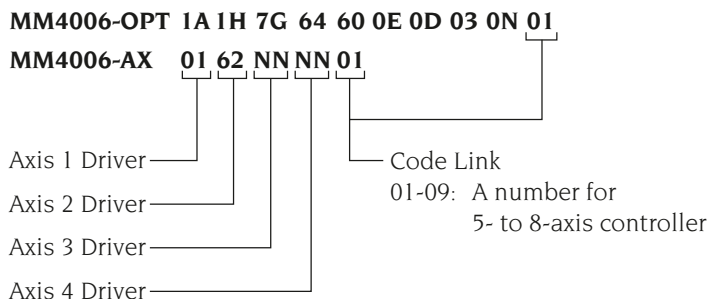

See page 1118 for list of driver options.
Specify NN for all unused axes.

NOTE: In order to operate all stages simultaneously and at maximum speed, the total power consumption of all stages must be less than the available drive power of the MM4006 power supply (240W or 500W). See page 1112 for motor drive power consumption of each Newport stage.

Driver Modules

The motor drive modules that integrate with the MM4006 are indicated as option codes and specified for each motorized stage. Please use the following options:

TSP Series
page 925

TSP, TSPW—OPT 7T



VP-25XA Series
page 931

VP-25XA—OPT 7S



VP-5ZA Series
page 934

VP-5ZA—OPT 7S



TSV Series
page 937

TSV—OPT 1M



IMS Series
page 940

IMSPP—OPT 41 NN*
IMSCC & CCHA—OPT 7L

*This drive takes space for two slots in the MM4006 mainframe. That's why the next following drive option must be coded "NN".



ILS Series
page 944

ILSPP—OPT 40
ILSCC—OPT 7J
ILSCCHA—OPT 7U



MTM Series
page 948

MTMPP1—OPT 1A
MTMPP.1—OPT 12
MTMPE1 & PE.1—OPT 1H
MTMPE1V6 & PE.1V6—OPT 1S
MTMCC1—OPT 7H
MTMCC.1—OPT 7G



UTM Series
page 952

UTMPP1HL & PP.1—OPT 12
UTMPE1 & PE.1—OPT 05
UTMPE1V6 & PE.1V6—OPT 07
UTMCC.1—OPT 7I
UTMCC1HL & CC.5HA—OPT 7G
UTMCC1DD & CC.1DD—OPT 64



CTS25 Series
page 956

CTS25—OPT 7K



MFN Series
page 958

MFNPP—OPT 01
MFNPPV6—OPT 1T
MFNCC—OPT 61




UZM Series
page 960

UZM80PP.1 &
UZM160PP.05—OPT 12
UZM80PE.1—OPT 05
UZM80PE.1V6—OPT 07
UZM160PE.05—OPT 1H
UZM160PE.05V6—OPT 1S
UZM80CC.1—OPT 64
UZM160CC.05—OPT 7G



RGV100
page 1003

RGV100—OPT 80



RV Series
page 1006

RV80PP—OPT 12
RV120-350PP—OPT 1A
RV80PE—OPT 05
RV80PEV6—OPT 07
RV120PE—OPT 12
RV120PEV6—OPT 1K
RV160-350PE—OPT 1A
RV160-350PEV6—OPT 1Q
RV80CC—OPT 3A
RV120-350CC—OPT 3B
RV120-350HAT—OPT 7P
RV80CCHL—OPT 64
RV120CCHL—OPT 3A
RV120HAHLT—OPT 7M
RV160-350CC—OPT 3B
RV160-350HAHLT—OPT 7P



URM Series
page 1014

URMPP—OPT 12
URMPEV6—OPT 07
URMPE—OPT 05
URMCCHL—OPT 7G
URMCC—OPT 64



495CC Series
page 1020

495CC Series—
OPT 64



SR50 Series
page 1022

SR50PP—OPT 06
SR50CC—OPT 61



PR50 Series
page 1024

PR50PP—OPT 06
PR50CC—OPT 62



BGM Series
page 1027

BGM50PP & BGM80PP—OPT 12
BGM50PEV6 & BGM80PEV6—OPT 07
BGM120PP—OPT 1S
BGM160PP & BGM200PP—OPT 1A
BGM50PE & BGM80PE—OPT 05
BGM120PE-BGM200PE—OPT 1H
BGM120PEV6-BGM200PEV6—OPT 1S
BGM50CC & BGM80CC—OPT 64
BGM120CC-BGM200CC—OPT 7H



VP-25AA Series
page 1091

VP-25AA—OPT 7S



VM Series
page 1096

VMPPE—OPT 01
VMPPV6—OPT 1T
VMCCE—OPT 62



850G Series
page 1098

850G & 850GV6—OPT 7D
850G-LS & 850G-LSV6—OPT 7E
850G-HS & 850-HSGV6—OPT 7F



CMA Series
page 1100

CMA-12PP—OPT 09
CMA-25CCCL—OPT 7A



EM Series
page 1103

EM31CC—OPT 64
EM41PP—OPT 12



Other Passthrough board to connect external drives—OPT XX

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanng.com | [artisanng.com](https://www.artisanng.com)

