

Newport M-426

## High-Performance Low-Profile Crossed-Roller Bearing Linear Stage



**\$495.00**

**In Stock**

**Qty Available: 5+**

**Used and in Excellent Condition**

**Open Web Page**

<https://www.artisanng.com/85598-2>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)


- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

## 426/436 Series

## Extended Platform Crossed-Roller Bearing Stages

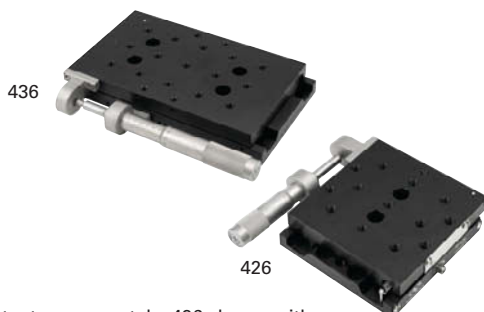

Order actuators separately. 426 shown with SM-25 and 436 shown with SM-50.

- Extra large solid and apertured platforms
- Crossed-roller bearing design for precision movement and larger load capacity
- Extensive interferometric quality testing
- Reconfigurable for left- or right-hand applications
- Compatible with Newport manual and motorized actuators
- All models lockable

Model 426/436 Series Extended Platform Crossed-Roller Bearing Stages feature extra large solid and apertured platforms complemented by crossed-roller bearings running on ground steel V-ways to provide an attractive combination of high-resolution movement, low runout, and large load capacity. For stability, repeatability, and exceptionally smooth motion, actuators bear upon a hardened carbide insert. Springs provide preload against the actuator tip to eliminate backlash. To ensure consistently dependable performance, these stages are tested in Newport's Quality Assurance Facility.

A highly stable and rigid stainless steel actuator mounting system allows your choice of Newport's manual or motorized actuators to be attached to the stage in either a left- or right-hand configuration. A non-influencing lock (also reversible for left handed configurations) similar to those used on our top of the line ULTRAlign™ Series provides positive stable positioning and guards against inadvertent adjustments.

Solid platform and aperture platform versions are offered. Each features a convenient array of 1/4-20 or Metric M6 tapped holes. The 2 in. diameter apertures of Models 426A and 436A are unobscured over 0.625 in. (16 mm) of travel. The stages are easily stacked for XY applications, and may be combined with our Model 360-90 Angle Bracket for XYZ configurations.


## Specifications

Model (Metric)	426	436
Maximum Stage Travel [in. (mm)]	1 (25)	2 (50)
Angular Deviation (μrad)	<150	
Max Centered Load [lb (N)]	73 (325)	125 (556)
Load Capacity, Vertical [lb (N)]	15 (67)	

## Ordering Information

Model (Metric)	Platform	Travel [in. (mm)]
426 (M-426)	Solid	1.00 (25)
436 (M-436)	Solid	2.00 (50)
426A (M-426A)	Apertured	1.00 (25)
436A (M-436A)	Apertured	2.00 (50)
AB-3 (AB-3)	Extra actuator mounting block	
AB-4 (AB-4)	Extra actuator push block	

426/436 Stages require one actuator that is not included. See table below for recommended actuators.

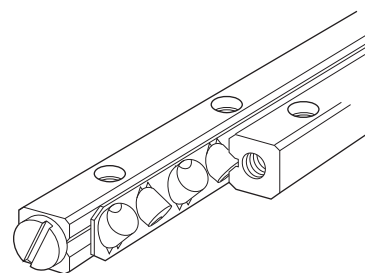

Preloaded crossed-roller bearings provide repeatable, zero stick-slip linear motion with negligible side-play. The roller strips hold cylindrical rollers alternately inclined 90° to assure constant linear contact with the hardened and ground ways.



426A

Order actuators separately. 426A is shown with SM-25.



SM Series Micrometers (see page 430)




DM-13 Differential Micrometer (see page 435)


## Recommended Actuators

426	436	Model	Description
Manual Drives			
•	•	AJS100-1	High Precision Small Knob Adjustment Screw, 25.4 mm Travel, 100 TPI, Side Lock
•	•	AJS100-2	High Precision Small Knob Adjustment Screw, 50.8 mm Travel, 100 TPI, Side Lock
•	•	SM-13	Vernier Micrometer, 13 mm Travel, 9 lb Load Capacity, 50.8 TPI
•	•	SM-25	Vernier Micrometer, 25 mm Travel, 23 lb Load Capacity, 50.8 TPI
•	•	SM-50	Vernier Micrometer, 50 mm Travel, 23 lb Load Capacity, 50.8 TPI
•	•	HR-13	High Resolution Micrometer, 0.5 $\mu$ m Sensitivity, 13 mm Travel
•	•	DM-13	Differential Micrometer, 13.0 mm Coarse, 0.2 mm Fine, 5 lb. Load Capacity
•	•	DM-13L	Lockable Differential Micrometer 13.0 mm Coarse, 0.2 mm Fine, 11.2 lb Capacity
•	•	DM-25L	Lockable Differential Micrometer, 25.0 mm Coarse, 0.2 mm Fine, 11.2 lb Capacity
Motorized Drives			
•	•	PZA12	NanoPZ Ultra-High Resolution Actuator, 12.5mm Travel
•	•	LTA-HS	High Speed Motorized Actuator, 50 mm travel, 3/8-40 thread, LTA Series
•	•	TRA25CC	Miniature Motorized Actuator, 25 mm Travel, DC Servo Motor


## Model 426 w/SM-25

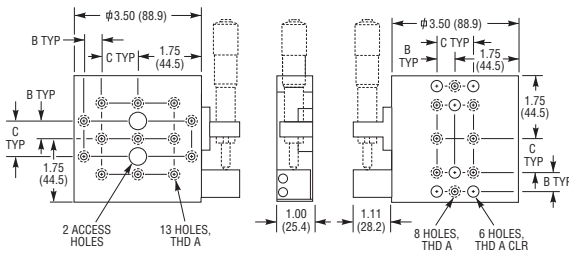


## Model 436 w/SM-50

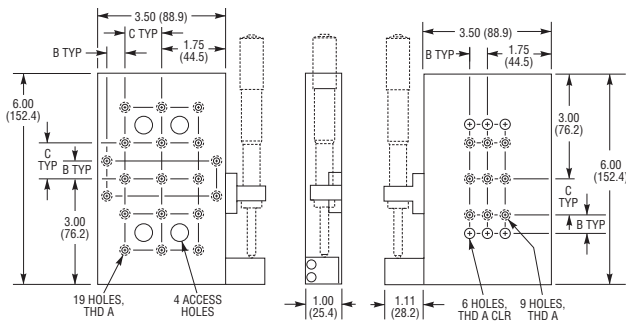

## Model 426A w/SM-25

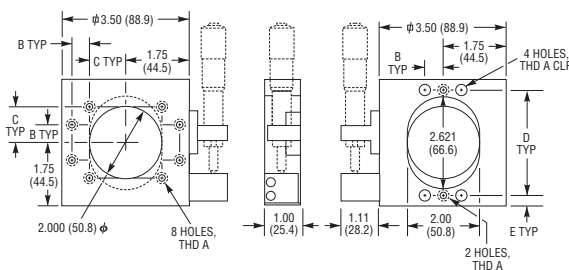


## Model 436A w/SM-50

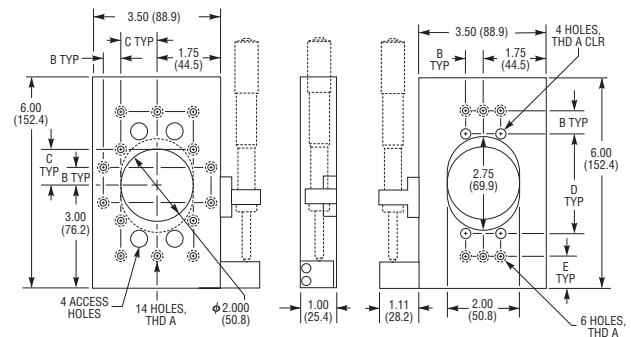

Model (Metric)	Thread		Dimensions [in. (mm)]			
	A	B	C	D	E	
426A (M-426A)	1/4-20 (M6)	0.500 (12.5)	1.000 (25.0)	3.000 (75.0)	0.25 (7.0)	
436A (M-436A)	1/4-20 (M6)	0.500 (12.5)	1.000 (25.0)	3.000 (75.0)	1.00 (26.2)	



Use an angle bracket to create multi-axis assemblies.

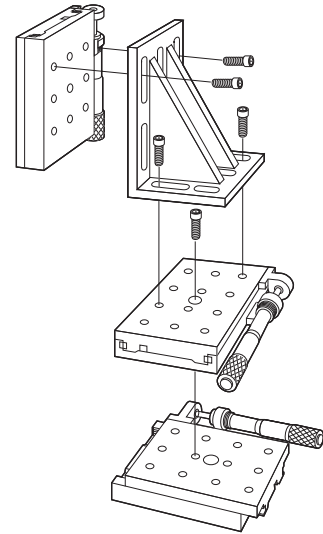

Models 360-90 and 360-30 can be used to make long-travel XYZ stages using linear stages like our Models 423, 433, 443, 426, or 436.



Extra actuator mounting block, AB-3.

# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisanTG.com](mailto:sales@artisanTG.com) | [artisanTG.com](https://www.artisanTG.com)

