

Purolator-Facet 440A1BNL103Y

Medium Pressure Filter Assembly



© Artisan Technology Group

\$95.00

In Stock

Qty Available: 5

Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/73574-15>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.



MEDIUM PRESSURE

MEDIUM PRESSURE FILTER ASSEMBLIES 410, 420, 430, 440 SERIES

FLOWS UP TO 12 GPM • OPERATING PRESSURE TO 3,000 PSI

PORT SIZES ("T" TYPE PORTING)

- 410: 1/4" (SAE-4) Straight Thread*
- 420: 3/8" (SAE-6) Straight Thread*
- 430: 1/2" (SAE-8) Straight Thread*
- 440: 3/4" (SAE-12) Straight Thread*

*Straight thread ports conform to SAE J1926 standards.

HOUSING SERIES FLOW

- 410: 1 gpm
- 420: 3 gpm
- 430: 6 gpm
- 440: 12 gpm

CONFORMS TO AIAG STANDARDS
FOR HF2 HYDRAULIC FILTERS

SPECIFICATIONS/ NOTES

Fatigue Pressure Rating 1,800 psi per NFPA/T.2.6.1 R1-1991

Typical Burst Pressure 15,000 psi per NFPA/T.2.6.1 R1-1991

Temperature Range (for housing only)	Nitrile: -65°F to 225°F (-55°C to 107°C)
	Fluorocarbon: -15°F to 400°F (-26°C to 205°C)
	Ethylene Propylene: -70°F to 250°F (-57°C to 121°C)

Fluid Compatibility	Nitrile Seals: Petroleum based fluids, water-oil emulsions, water-glycol
	Fluorocarbon Seals: Synthetic lube oils
	Ethylene Propylene Seals: Phosphate ester fluids, water-glycol


Materials	Head: Aluminum
	Bowl: Forged Aluminum

Finish	Anodize
--------	---------

Dry Weight	410 Series Housing: 0.5 lbs.
	420 Series Housing: 1.0 lbs.
	430 Series Housing: 2.0 lbs.
	440 Series Housing: 3.0 lbs.



DIMENSIONAL INFORMATION

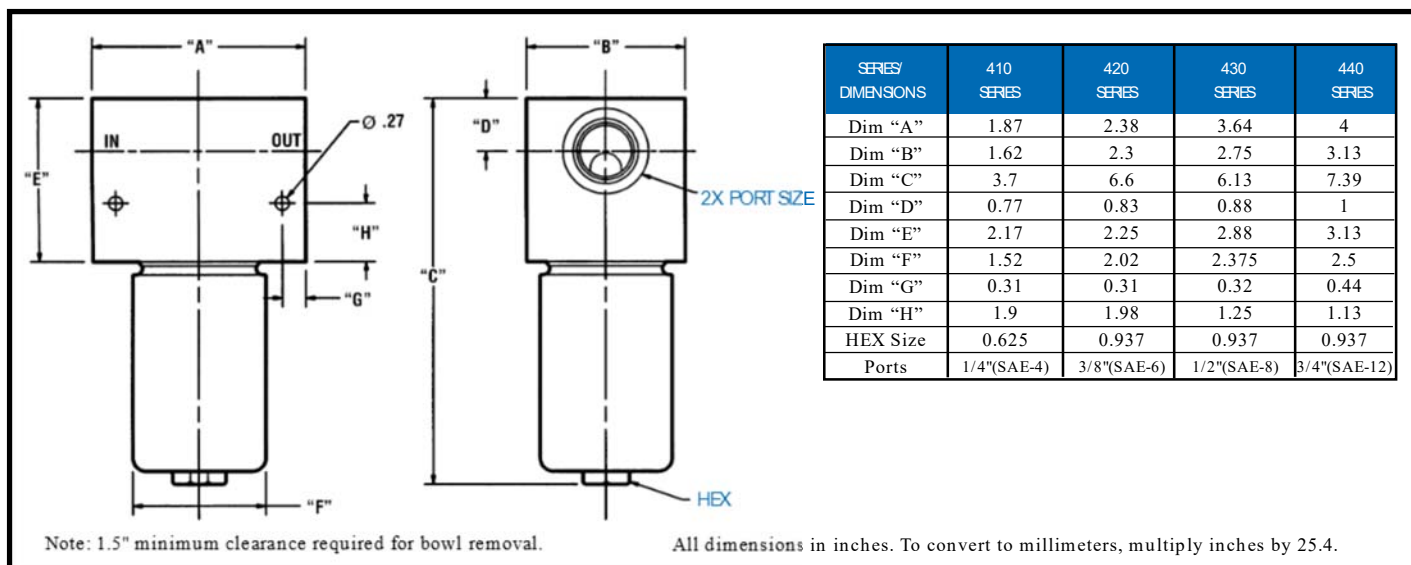

REPLACEMENT ELEMENTS

ELEMENT SERIES	HOUSING SERIES	MEDIA AVAILABLE	COLLAPSE PRESSURE
1100	410	Micropleat® Microfil®III, Hi-Collapse Microfil®III and Poromesh®	150 psid, 300 psid and 3,000* psid.
1200	420		
1300	430		
1400	440		

*Note: For 3,000 psid collapse elements, consult factory.



Micropleat®
Elements



Poromesh®
Elements



Microfil®III
Elements

410-440 SERIES

440 SERIES

430 SERIES

420 SERIES

410 SERIES

FILTER ELEMENT PERFORMANCE


1100, 1200, 1300, 1400 SERIES ELEMENTS		
MEDIA	FILTRATION RATING	AVERAGE BETA NUMBER ¹
Microfil® III & Hi-Collapse Microfil® III	1µm ABS	$\beta_{1x} \geq 200$
	3µm ABS	$\beta_{3(c)} \geq 200$
	6µm ABS	$\beta_{6(c)} \geq 200$
	12µm ABS	$\beta_{12(c)} \geq 200$
	20µm ABS	$\beta_{20(c)} \geq 200$
Micropleat®	25µm ABS	$\beta_{25(c)} \geq 200$
	5µm NOM	$\beta_5 \approx 2$
	10µm NOM	$\beta_{10} \approx 2$
	20µm NOM	$\beta_{20} \approx 2$
	40µm NOM	$\beta_{40} \approx 2$
Poromesh®	2µm NOM	*
	5µm NOM	*
	10µm NOM	*
	20µm NOM	*
	40µm NOM	*

1) Testing per ISO 16889 terminal $\Delta P = 50$ psid.


*Average Beta Number is not available for Poromesh® filter media.

PRESSURE DROP INFORMATION


Filter Housing Pressure Drop using 150 SUS (32cst) 0.9 S.G. fluid. For 410-440 series housings. Housing pressure drop is proportional to fluid specific gravity.

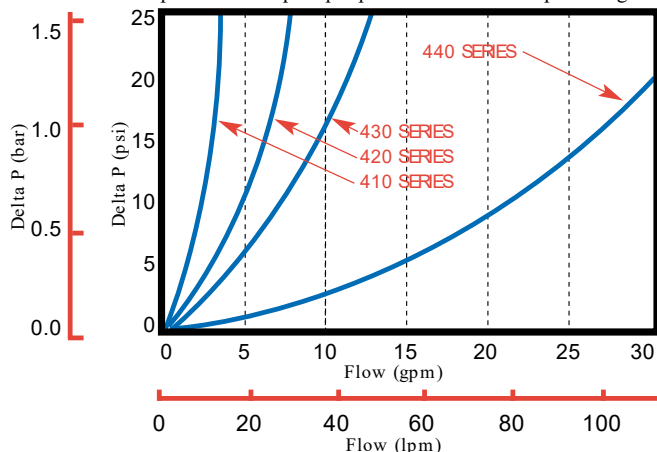


Bypass Valve Pressure Drop using 150 SUS (32cst) 0.9 S.G. fluid. For 410-440 series housings. Bypass valve pressure drop is proportional to fluid specific gravity.

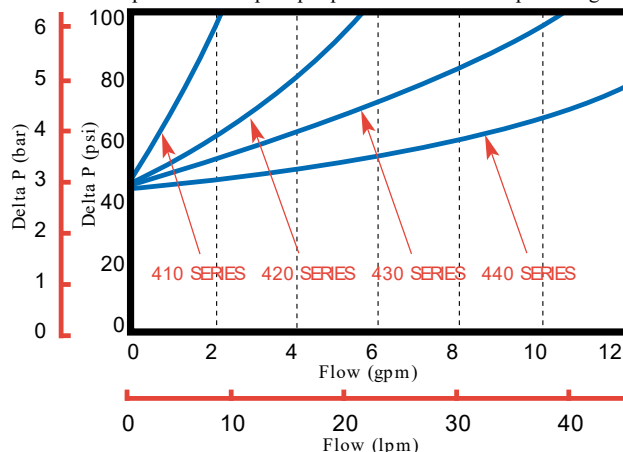


Clean Element Pressure Drop (1100 series element for 410 housing)

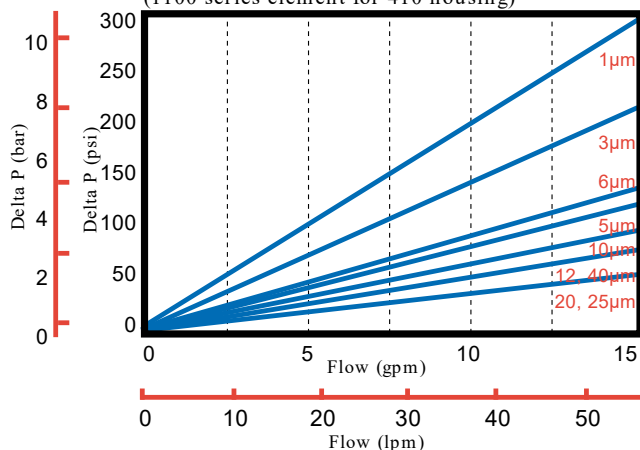


Clean Element Pressure Drop (1200 series element for 420 housing)

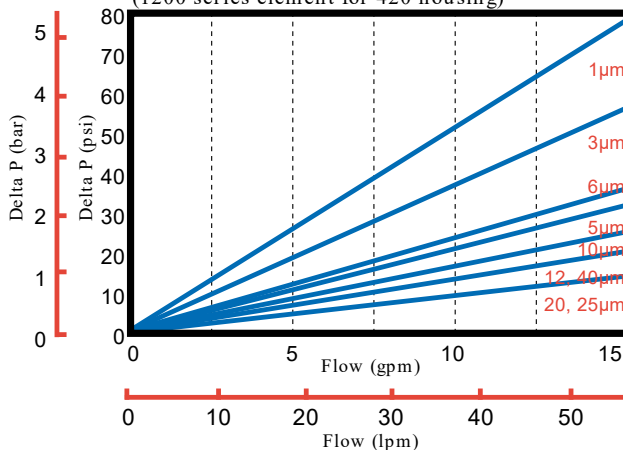

Clean Element Pressure Drop (1300 series element for 430 housing)

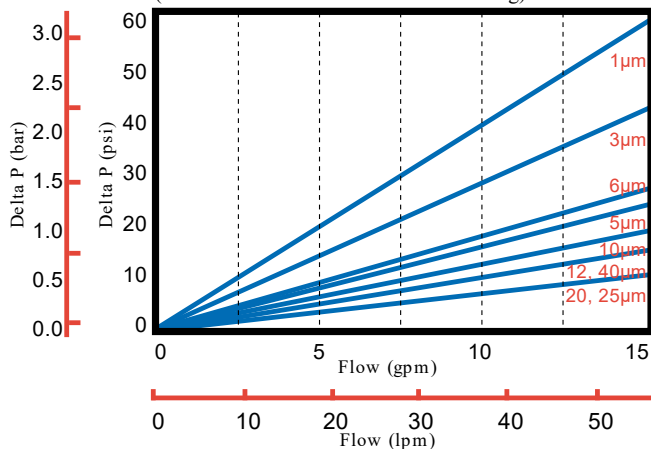

Clean Element Pressure Drop (1400 series element for 440 housing)

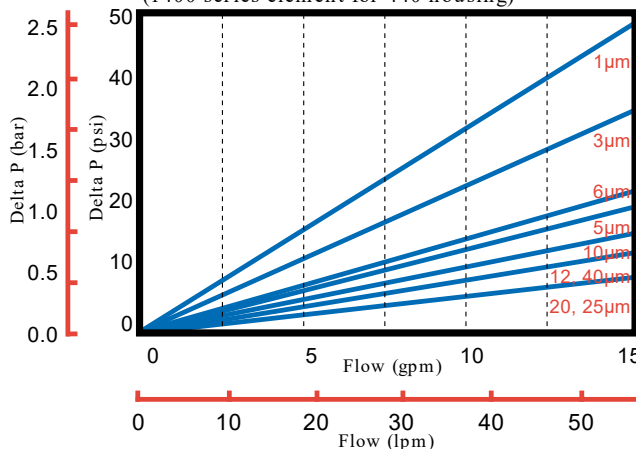

Note: Element pressure drop tests use 150 SUS (32cst) 0.9 Specific Gravity fluid. For other fluids, multiply pressure drop from graph by new viscosity (centistokes) divided by old viscosity (32 centistokes). To obtain filter assembly pressure drop, add the housing pressure drop to the element pressure drop for the appropriate element micron rating.

Purolator Facet, Inc. • Made in USA
8439 Triad Drive • Greensboro, NC 27409
Tel: 800-852-4449 or 336-668-4444 • Fax: 336-668-4452
Email: info@purolator-facet.com • Web site: www.purolator-facet.com



ORDERING INFORMATION

410-440 SERIES FILTERS

FILTER ASSEMBLY P/ N

CODE	HOUSING SERIES	PORT SIZES
410	410 Series	1/4" (SAE-4) Straight Thread
420	420 Series	3/8" (SAE-6) Straight Thread
430	430 Series	1/2" (SAE-8) Straight Thread
440	440 Series	3/4" (SAE-12) Straight Thread

FILTER ASSEMBLY

CODE	DESCRIPTION
N	No Bypass
B	50 psid Bypass

BYPASS VALVE

CODE	DESCRIPTION
N	Not Available

INDICATOR

CODE	DESCRIPTION
L	150 psid (Micropleat®, Microfil®III, Poromesh® only)
M	300 psid (Microfil®III, Poromesh®, Micropleat® only)
H	3000 psid (Hi-Collapse Microfil®III only)

ELEMENT COLLAPSE PRESSURE

EXAMPLE P/ N:

440 A1 B N L 03 2 N

SEAL MATERIAL

CODE	DESCRIPTION
N	Nitrile
F	Fluorocarbon
E	Ethylene Propylene

MEDIA

CODE	DESCRIPTION
1	Micropleat®
2	Microfil® III
3	Poromesh®
4	Hi-Collapse Microfil® III

MEDIA MICRON RATING

MICROFIL®III and HI-COLLAPSE III ⁽¹⁾		MICROPLEAT® ⁽²⁾		POROMESH® ⁽³⁾	
CODE	MICRON	CODE	MICRON	CODE	MICRON
01	1 µm	05	5 µm	02	2 µm
03	3 µm	10	10 µm	05	5 µm
06	6 µm	20	20 µm	10	10 µm
12	12 µm	40	40 µm	20	20 µm
20	20 µm			40	40 µm
25	25 µm				

- (1) Microfil®III and Hi-Collapse Microfil®III composite media, composed of fiberglass, organic and inorganic materials, are rated for a maximum operating temperature of 300°F.
(2) Micropleat® resin-impregnated cellulose media are for a maximum operating temperature of 300°F.
(3) Poromesh® diffusion-bonded wire cloth media are rated to a maximum operating temperature of 400°F.

1100-1400 SERIES REPLACEMENT ELEMENTS

ELEMENT P/ N

CODE	HOUSING COMPATIBILITY
1100	410 Series Housing
1200	420 Series Housing
1300	430 Series Housing
1400	440 Series Housing

ELEMENTS AVAILABLE

CODE	DESCRIPTION
L	150 psid (Microfil®III, Poromesh®, Micropleat® only)
M	300 psid (Microfil®III, Poromesh®, Micropleat® only)
H	3000 psid (Hi-Collapse Microfil®III only)

ELEMENT COLLAPSE PRESSURE

EXAMPLE P/ N:

1400 EA L 03 2 N 1

ELEMENT LENGTH

CODE	DESCRIPTION
1	Single Length

SEAL MATERIAL

CODE	DESCRIPTION
N	Nitrile
F	Fluorocarbon
E	Ethylene Propylene

MEDIA

CODE	DESCRIPTION
1	Micropleat®
2	Microfil® III
3	Poromesh®
4	Hi-Collapse Microfil® III

MEDIA MICRON RATING

MICROFIL®III and HI-COLLAPSE III ⁽¹⁾		MICROPLEAT® ⁽²⁾		POROMESH® ⁽³⁾	
CODE	MICRON	CODE	MICRON	CODE	MICRON
01	1 µm	05	5 µm	02	2 µm
03	3 µm	10	10 µm	05	5 µm
06	6 µm	20	20 µm	10	10 µm
12	12 µm	40	40 µm	20	20 µm
20	20 µm			40	40 µm
25	25 µm				

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisan^{tg}.com](https://www.artisantg.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisan^{tg}.com | [artisan^{tg}.com](https://www.artisantg.com)

