

HunterLab D02-1009-973

LSXL-BD Lamp Board



Limited Availability
Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/54443-9>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com


- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

60W Universal Input Series

PSA-60 Series Switching Power Supply

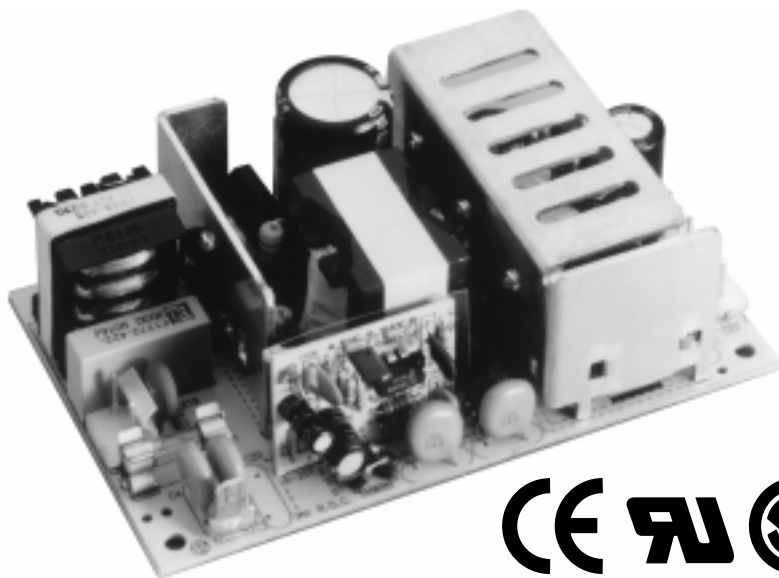

Features

- High efficiency
- Over voltage protection
- Built-in EMI filter
- Short circuit protection

Applications

- Disk/Tape drive systems
- Microprocessor systems
- Peripheral equipment
- Mixed logic applications

Safety Compliance

- UL 1950 [E134610]
- CSA 22.2 234 [LR 56927-137]
- CE (Low Voltage Directive)
- VDE 0805/IEC 950 [74709]
- CB Report [DE3827]

Mechanical Characteristics

- Dimensions:
- Length: 127mm (5.0in)
 - Height: 40mm (1.58in)
 - Width: 76.2mm (3.0in)
 - Weight: 0.36kgs (0.79lbs)

Output Specifications

Model	DC Output Voltage	Load				Ripple P-P	Total Tolerance	Output Pins
		Min.	Max.	@20CFM	Peak			
PSA-60-105	+5V	0.0A	10A	10A	12A	50mV	+2%	1,2,3
PSA-60-112	+12V	0.0A	5.0A	6.6A	8.3A	120mV	+2%	1,2,3
PSA-60-115	+15V	0.0A	4.0A	5.3A	6.6A	240mV	+2%	1,2,3
PSA-60-124	+24V	0.0A	2.5A	3.3A	4.2A	150mV	+2%	1,2,3
PSA-60-148	+48V	0.0A	1.2A	1.4A	2.1A	480mV	+2%	1,2,3
PSA-60-202	+5.1V	1.0A	6.0A	8.0A	8.0A	50mV	+2%	2,3
	+24V	0.1A	1.3A	1.8A	2.0A	240mV	+5%	1
PSA-60-203	+5.1V	1.0A	4.0A	6.0A	8.0A	50mV	+2%	2,3
	+12V	0.3A	3.5A	4.5A	8.0A	120mV	+5%	1
PSA-60-301	+5.1V	1.0A	6.0A	8.0A	10A	50mV	+2%	2,3
	+12V	0.3A	2.2A	3.0A	6.0A	120mV	+5%	1
PSA-60-303	-12V	0.0A	0.3A	0.5A	1.5A	120mV	+5%	6
	+5.1V	1.0A	6.0A	8.0A	10A	50mV	+2%	2,3
PSA-60-304	+12V	0.3A	2.2A	3.0A	6A	120mV	+5%	1
	-5V	0.0A	0.5A	0.5A	1.5A	50mV	+5%	6
PSA-60-304	+5.1V	1.0A	6.0A	8.0A	8.0A	50mV	+2%	2,3
	+15V	0.3A	1.5A	2.0A	2.0A	150mV	+5%	1
PSA-60-304	-15V	0.0A	0.5A	0.5A	0.5A	150mV	+5%	6

- (1) Total output power must not exceed 60W at convection cooling and 80W at 20CFM air flow condition.
(2) Peak output current lasting less than 30 seconds with duty cycle less than 10%. During peak loading, peak total power must not exceed 80W.
(3) Ripple & noise is measured at 20MHz bandwidth limit by use a 10 inch twisted wire terminated with a 10µf capacitor in parallel 0.1µf ceramic capacitor.

NOTICE

**ISO 9001 • BABT
Facility Approvals**



ENTERPRISE CO., LTD.

16, Lane 530, Chung Cheng N. Rd.
Sanchung City, Taipei
Taiwan 24103, R.O.C.
Phone: 886-2-988-2126
886-2-980-5255
Fax: 886-2-981-7086
886-2-983-3222

PHIHONG USA

Western Office:
48607 Warm Springs Blvd.
Fremont, CA 94539
Phone: (510) 445-0100
Fax: (510) 445-1678
Email: usasales@phihongusa.com
Internet: <http://www.phihongusa.com>

Eastern Office:
3005 Brodhead Road
Bethlehem, PA 18017
Phone: (610) 866-9911
Fax: (610) 866-9920

60W Universal Input Series

PSA-60 Series Switching Power Supply

Characteristics

AC input Voltage
90VAC-260VAC

AC Frequency
47 to 63Hz

AC Input Current
1.4A(rms) for 115VAC
0.7A(rms) for 230VAC

DC Output
See Chart

Efficiency
70% typical at full load

Hold-up Time
12msec. at full load,
115VAC input

Overvoltage Protection
5.6V to 6.5V on main output

Overcurrent Protection
All outputs equipped with auto-
matic recovery current limiting
circuit

Operation Temperature
0 to +25°C Full rated load
Derates to 85% at 50°C
Derates to 50% at 70°C

Temperature Coefficient
0.04% per °C


Storage Temperature
-25°C to +85°C

MTBF
Calculated
Greater than 110,000 hours,
full load, 25°C
(MIL-HDBK-217)

Emissions
FCC Class B
EN 50081-1: EN 55022 B

Immunity
EN 50082-1: IEC 801-2 Level 3
IEC 801-3 Level 2
IEC 801-4 Level 2

Dimension Diagram Unit: mm (inch)

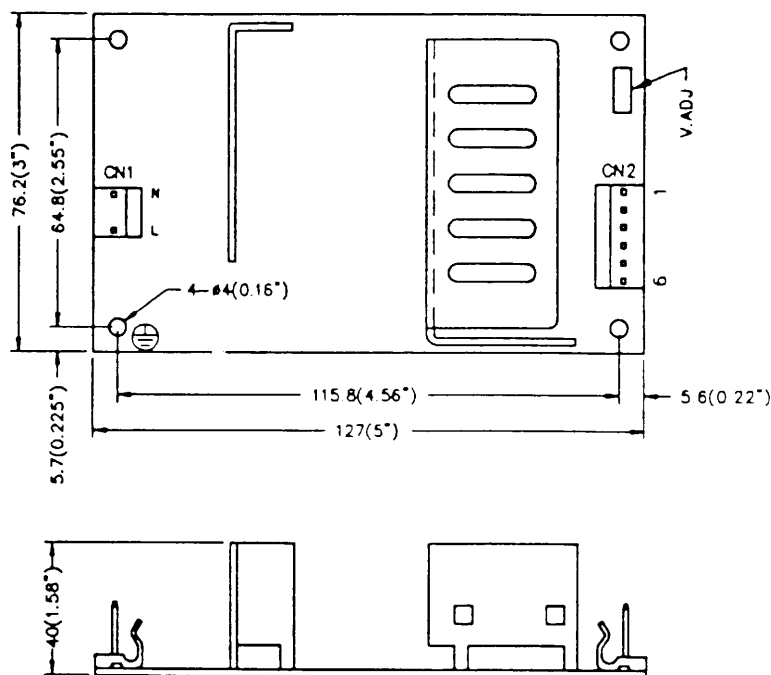

Output Connections:

	Single	Multiple
Pins 1,2,3:	See Chart	See Chart
Pins 4,5:	Common return	Common return
Pins 6:	Common return	See Chart

CN1: Input: Molex 09-50-3031 or equivalent CN2: Molex 09-50-3061 or equivalent

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phihong:](#)

[PSA60-203-R](#) [PSA-60-304](#) [PSA-60-301](#) [PSA-60-302](#) [PSA-60-202](#) [PSA-60-124](#) [PSA-60-105](#) [PSA-60-148](#) [PSA-60-203](#) [PSA-60-112](#) [PSA-60-115](#) [PSA60-112-R](#)

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanng.com | [artisanng.com](https://www.artisanng.com)

