



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)


# M THERM-20

## 20-Channel Thermocouple Interface Board For the METRABUS

### Functional Description


The M THERM-20 is a thermocouple input board employing 20 differential input channels. Designed specifically for use with the METRABUS Industrial Data Acquisition and Control System, the M THERM-20 employs a 12-bit integrating A/D converter and 20-channel MUX for reliability, accuracy and low cost. The M THERM-20/METRABUS system is compatible with a very broad range of personal computers and bus structures including IBM PC/XT/AT and compatibles, and virtually all other large or small computers supporting data I/O via the serial input port (RS-232/422). The seven industry-standard thermocouples are supported directly (DIP-switch-selectable for J, K, T, R, S, B, or E) with data conversion to your choice of degree C or F. In addition, cold-junction compensation can be disabled for direct measurement of millivolts in any of four different full scale input ranges (0 to 76.4mV, 0 to 25mV, 0 to 15mV, or 0 to 5mV).

An onboard microcomputer computes the temperature from the measured input voltage, applies CJC and stores the results (internal 256 bytes of RAM) until retrieved. When allowed to collect data continuously, RAM is updated every 1.25 seconds (max, 20 channels). A short-cycle mode is also available when less than the full complement of 20 channels are used. Up to a maximum of 320 input channels (16 M THERM-20s) are available from a single METRABUS interface board.

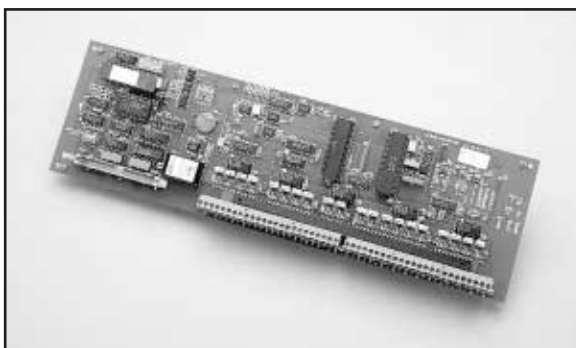

The M THERM-20 is fully isolated to 500 VDC with greater than 72 dB Common Mode Rejection (35 dB NMR). Measurement resolution is 0.1 to 0.8°C (range dependent) with a measurement accuracy of 0.5°C. Signal input filtering can be implemented using a four sample-time constant (switch-selectable). Required power is +5 VDC @ 500 mA (typ) via the METRABUS cable or via an external power supply. Removable screw terminals will accept 14 AWG or smaller thermocouple wire.

The M THERM-20 interfaces to the METRABUS via a 50 conductor ribbon cable carrying data, power, and control signals to and from the board. Ground lines are interleaved with data lines to assure accurate, noise-free measurements even at lengths of 100 feet (max) from the computer. This allows M THERM-20 positioning adjacent to its point of use for easy signal connections. The M THERM-20 can be mounted in standard NEMA type enclosures or in Keithley's own RMT-type enclosure (see accessories, page 479).

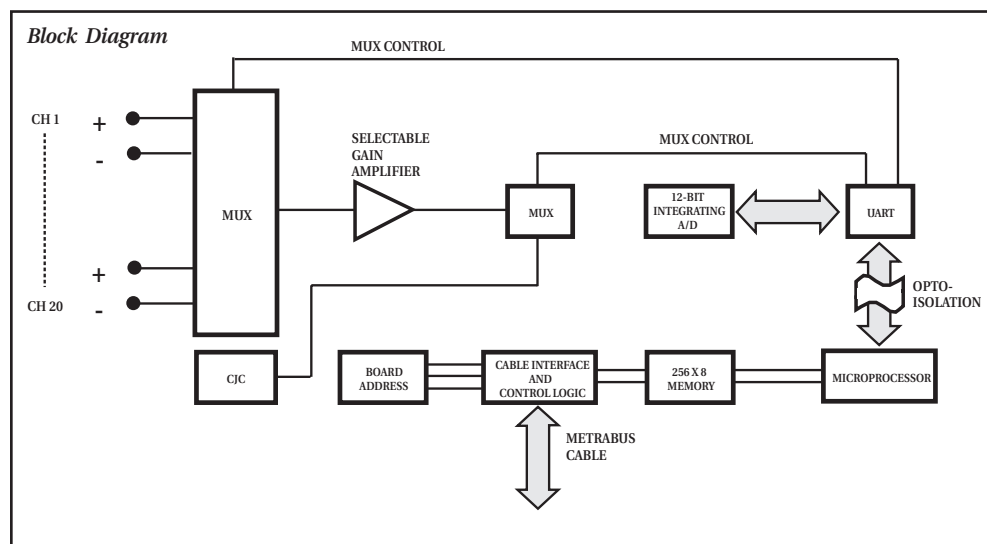

### FEATURES

- Low noise 12-bit integrating A/D converter
- Up to 320 input channels per PC expansion slot or driver board
- User selectable for Type J, K, T, R, S, B, or E type thermocouples or mV
- Protected to 500VDC
- Automatic cold-junction compensation circuitry
- Data stored in either degrees C or degrees F format
- Interfaces to any IBM PC/XT/AT or compatible computer, and others computers via the RS-232/422 serial port

### APPLICATION

- Process monitoring
- Process control
- Temperature logging
- Distributed systems

### QUESTIONS?

1-800-552-1115 (U.S. only)

Call toll free for technical assistance, product support or ordering information, or visit our website at [www.keithley.com](http://www.keithley.com).

# M THERM-20

## Temperature Accuracy in the M THERM-20

The error in measuring temperature with the M THERM-20 can be stated as being composed of the following components:

$$\text{Error} = A+B+C+D$$

where A = Thermocouple sensor error (see manufacturer)

B = Signal conditioning, A/D, and computational errors.

This is twice the resolution or at best 0.4°C (thermocouple type dependent).

If the local CJC is used to correct measurement then:

C = CJC measurement error. This is 0.5°C (0 to 50°).

D = Channel-to-channel temperature gradient at the terminal strip. In table top, 25°C, still air situations, this has been measured to be about ±0.7°C from channel 1 to 20. With proper forced air ventilation, this can be lowered to ±0.1°C.

**M THERM-20 MAXIMUM ERROR SUMMARY TABLE (J TYPE) (°C)**

SITUATION	T/C A	A/D B	CJC C	T GRADIENT D (NOTE 1)	TOTAL ERROR
CJC NOT USED					
USED	A	0.4	0	0	A+0.4
CJC USED					
STILL AIR	A	0.4	0.5	0.7	A+1.6
CJC USED					
VENTED	A	0.4	0.5	0.1	A+1.0

Note 1: These errors are at 25°C measurement and CJC. The effects of CJC error are less at higher measurement temperature.

## Programming

Programming the M THERM-20 is quite straightforward due to its unique address mapping technique. All data I/O and channel selection as well as reading the Options switch are accomplished via four addresses in the METRABUS address space. These four addresses are consecutive locations starting from the Base Address. Their function and location are detailed below.

ADDRESS LOCATIONS	READ	WRITE
M THERM-20 ADDRESS	CHAN ID/CJC	CHAN ID/CJC (HOLD)
M THERM ADDR + 1	DATA (low byte)	CHAN ID/CJC (HOLD)
M THERM + 2	DATA (high byte)	CHAN ID/CJC (HOLD)
M THERM ADDR + 3	CONFIGURATION	CHAN ID/CJC (HOLD)

Writing to any of the above locations latches the specified input channel (or CJC channel) and halts A/D conversion thus avoiding read/write conflicts. Prior to retrieving data, the HOLD mode must be cleared by writing to any address other than the four assigned to the M THERM-20 (above). M THERM-20 channels are numbered consecutively from 1 to 20 with channel 0 being the Cold Junction reference channel. Reading the M THERM-20 ADDRESS will return the specified channel number. Data is held in M THERM RAM (256 × 8) and may be retrieved by reading M THERM ADDR + 1 and + 2, respectively, for the specified channel. Data is continuously updated in RAM at a rate of 20 channels per 1.25 seconds (RAM is not updated during a HOLD state, but data is still taken and placed in an update queue until HOLD is cleared whereupon collected data is placed in RAM).

Data is stored in M THERM-20 RAM in two's complement, 16-bit format (divided by 10) from -3276.8 to 3276.7. Upon data retrieval, conversion to temperature is simply a matter of converting from binary to decimal format.

## SPECIFICATIONS

### METRABUS ADDRESS SPACE

4 consecutive addresses

INPUT CHANNELS: 20 differential

THERMOCOUPLE TYPES: T, S, R, B, J, K, E

MEASUREMENT RESOLUTION: 0.8 to 0.1 (TC dependent) °C

VOLTAGE REFERENCE ERROR: 25ppm/°C max

MEASUREMENTS UNITS: Choice of °C or °F or mV

FILTER: 4-sample time constants (when implemented)

CJC TEMP ERROR (0 to 50°C): 0.5°C

A/D CONVERTER TYPE: 12-bit, dual-slope integrating

A/D ACCURACY: ±1 bit

FULL SCALE RANGES: 76.4, 25, 15, or 5mV

UPDATE RATE: 1.25s (20 channels) 0.31s (5 channels)

INPUT ISOLATION: 500VDC 10MΩ to METRABUS

### POWER REQUIREMENTS

+5V: 500 mA typ

±15V: not used

### PHYSICAL

OPERATING TEMP: 0 to 70°C

STORAGE TEMP: -40 to 100°C

HUMIDITY: 0 to 95%, non-condensing

DIMENSIONS: 16in L × 4.75in W (40.63cm L × 12.06cm W)

### ORDER DESCRIPTION

M THERM-20 METRABUS 20-Channel Thermocouple Interface Board

### QUESTIONS?

1-800-552-1115 (U.S. only)

Call toll free for technical assistance, product support or ordering information, or visit our website at [www.keithley.com](http://www.keithley.com).



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)