

Physitemp BAT-12
Microprobe Thermometer



**Limited Availability
Used and in Excellent Condition**

Open Web Page

<https://www.artisantg.com/58013-1>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.


Artisan Technology Group

(217) 352-9330 | sales@artisantg.com | artisantg.com

- Critical and expedited services
- In stock / Ready-to-ship
- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

BAT-12 Microprobe Thermometer

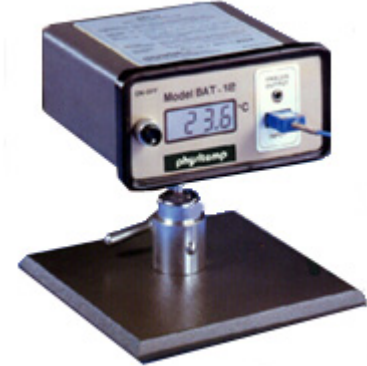

- BAT-12 reads to 1/10°C
- Super Accuracy and Fast Readings
- Auto Corrected for Ambient Temperature
- Heavy duty carrying case
- Analog output

We designed the world's first thermocouple thermometer, Model BAT-4, in 1969. It soon found uses in the lab, factory, hospital O.R. and in the field. The new BAT-12 has improvements for all these applications:

In the lab: Readings to 0.1° C; near perfect stability.

In the field: A superior cold junction reference which maintains accuracy with ambient temperature changes from 0°C to 50°C; sealed construction, carrying case.

For recording: Analog output for strip chart recording is a standard feature.

BAT-12 is the ideal instrument for use with microprobes. These 5 sensors are among our most popular and there are many more to choose from:

- Flexible Implantable Microprobe, IT-18
- Needle Microprobe, MT-26/2
- Surface Probe, BT-1
- General Purpose Probe, HT-1
- Sensor Six Pack, PT-6

Request "Type T Probe Literature".
OR click [here](#)

BAT-12 Specifications

Temperature Range:	-100°C to +200°C
Resolution:	0.1°
Accuracy:	0.1°C ± 1 digit between 0-50°C 0.1% ± 1 digit over full range
Calibration Conformity:	Follows NIST thermocouple tables within 1 digit
Ambient Temperature Compensation:	Auto-compensated to 0.1°C from 0°C to 50°C
Readout:	3 1/2 digits, 1/2" liquid crystal numerals
Input Socket:	Miniature, quick disconnect, copper-constantan
Analog Output:	10mV per degree C, approx.
Power Supply: Model BAT-12	9V transistor battery, available everywhere
Model BAT-12R	AC 115V and Ni-Cad battery with charger
Size, Weight:	5" x 2 1/2" x 6" - 2 lbs.,

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanTG.com | [artisanTG.com](https://www.artisanTG.com)

