ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Pickering 10-520* at our website: ***Click HERE***

10-510/520/530
Switching Matrix Module



- 8x4, 16x4 and 8x8 Matrix Formats
- 1 or 2 Pole Switching
- Modules Expandable up to 2000 Crosspoints
- Switch up to 100 Volts DC, 0.5 Amps (1A Carry Current)
- 50W Max Power
- Uses High Reliability Pickering Ruthenium Reed Relays For Maximum Performance

The 10-510, 10-520 and 10-530 are a range of matrix modules arranged in 8x4, 16x4 and 8x8 configurations respectively, available with either 1 or 2 pole switching to suit many switching requirements. They are Intended for construction of small to medium matrix switching systems.


Typical applications include signal routing in ATE systems, dynamically interconnecting the Device Under Test (DUT) to all the stimulus and measurement instruments and for high accuracy data acquisition.

Connections are made via two front panel mounted D-Type connectors. Larger matrices may be constructed by interconnecting matrix modules, see diagram.


If your switching application requires any of the following:

- High density matrix with hundreds of crosspoints.
- Extensive self test with relay fault diagnosis.
- Isolation switching to reduce stray capacitance and DC leakage.
- Internal analogue bus expansion to simplify cabling.

Then look at our System 20 range of matrix modules.

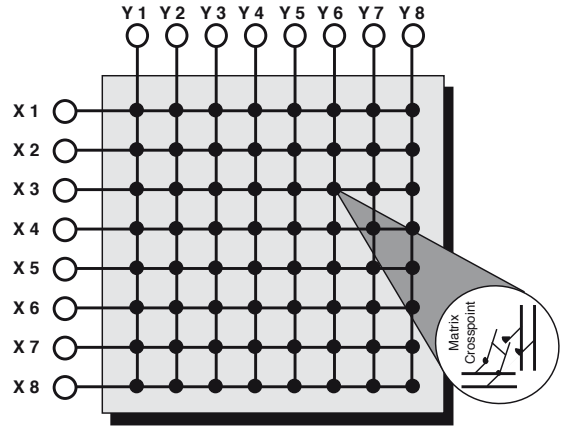


8x8 Double Pole Matrix (10-530)

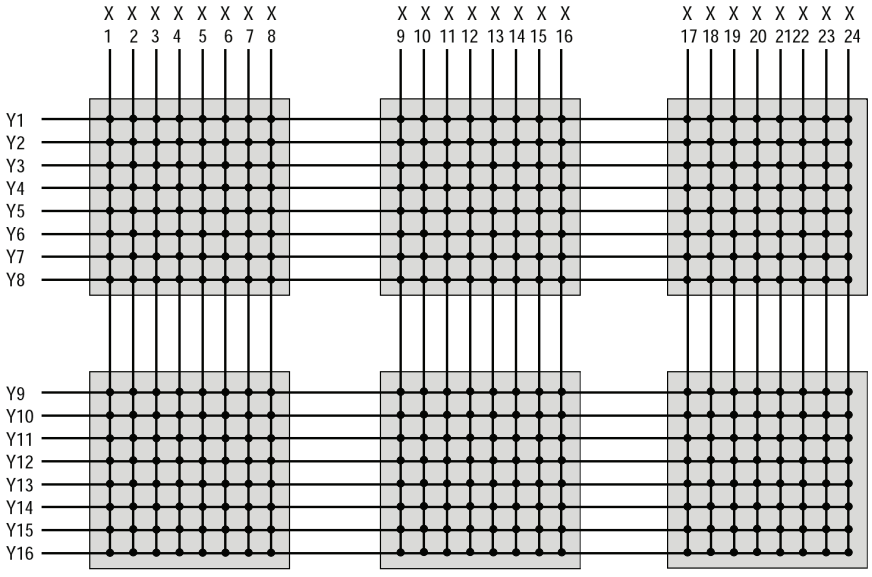

Typical Matrix: 24x16 Constructed Using Six 8x8 Modules

ISSUE 3, JUN 2006

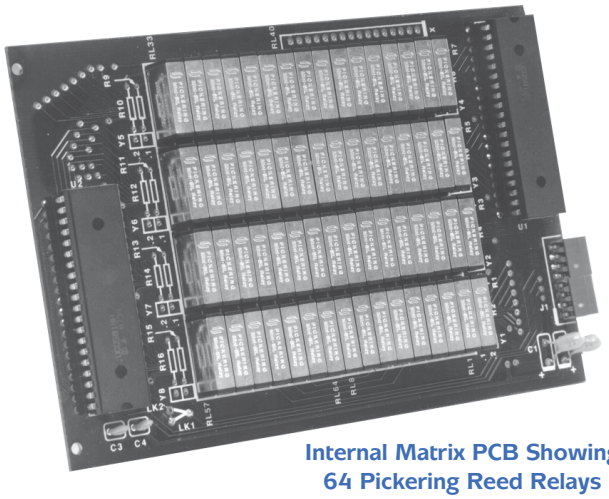

Internal Matrix PCB Showing 64 Pickering Reed Relays

Switching Specification

Switch Type:	Ruthenium	Mercury wet†
Max Standoff Voltage:	100V	100V
Max Power:	20W	50W
Max Switch Current:	0.5A	2.0A
Max Carry Current:	1.0A	3.0A
Contact Resistance		
On:	200mΩ	200mΩ
Off:	>10^9Ω	>10^9Ω
Differential Thermal Offset:	<5µV	<10µV
Capacitance:		
Open Channel;	<6pF	<6pF
Channel-Channel;	<20pF	<20pF
Bandwidth (50Ω):	10MHz	10MHz
Max Operate Time:	7ms	9ms
Max Release Time:	6ms	8ms
Expected Life (operations)		
Low power load:	>1x10^8	>1x10^9
Full power load:	>1x10^6	>1x10^8

† Mercury wet versions may be available to special order.

Programming

The Matrix module is very easy to program using the Intelligent IEEE-488.2 Interface:-

`ARESET a`	Open all switches on device a
`DIAGNOSTIC?`	Report any Self Test errors
`DELAY t`	Force a minimum delay of t milliseconds between two instructions
`MCLOSE a,x,y`	Close switch at coordinates x,y on matrix a
`MOPEN a,x,y`	Open switch at coordinates x,y on matrix a
`RESET`	Open all switches on all modules
`VIEW? a`	View status of device a

Further matrix control may be achieved using the IEEE-488.2 stored settings commands, these permit the storage and later recall of complex matrix configurations.

Limiting Resistors

Built in limiting resistors on each row and column may be fitted, useful in preventing high current in-rushes which may damage the reed switch, please specify option **-R**.

Connectors

Matrix connection is via two 37-Way D-Type Male Connectors (one connector for each of the X and Y axes). Please note that these connectors are spaced closely together so care must be taken to use mating connectors that will fit on to the front panel together.

Creating Larger Matrices

Each System 10 interface can directly support matrices to over 2000 crosspoints. Larger sizes are supported using multiple System 20 matrix modules.
Large matrices are constructed by interconnecting two or more matrix modules. All such matrix modules must have the same primary address (up to 30 modules may have the same primary address). Their position within the matrix is determined by their bank address, this is set on an additional 5 way dip switch.
Pickering can build large Matrix systems constructed and tested to your exact requirements, please contact sales office for further details.

Mixed Matrix/Multiplexers Configurations

For some users requiring very large matrix systems the cost of a "full" matrix may prove prohibitive, in many instances a combination of multiplexer input/output and partially filled matrix may prove quite acceptable and could be more effective in terms of both cost and performance. Please contact Pickering to discuss your application in detail.

Reed Switch Type

The module uses instrument grade sputtered Ruthenium Reed Switches which are suitable for switching very low level signals with a low and stable contact resistance. Mercury Wetted Reed Switches may be available to special order.
All Pickering matrix modules allow any combination of crosspoints to be selected. Spare reed relays are built onto the PCB for easy maintenance and minimum downtime.

Width and Dimensions

All model versions are housed in a shielded 3U height (128mm) Eurocard module and are 160mm deep, panel width for all versions is 2.4 Inches.

Product Order Codes

8x4, 1-Pole Matrix, Ruthenium Reed	**10-510-021**
8x4, 2-Pole Matrix, Ruthenium Reed	**10-510-022**
16x4, 1-Pole Matrix, Ruthenium Reed	**10-520-021**
16x4, 2-Pole Matrix, Ruthenium Reed	**10-520-022**
8x8, 1-Pole Matrix, Ruthenium Reed	**10-530-021**
8x8, 2-Pole Matrix, Ruthenium Reed	**10-530-022**

Mating Connectors & Cabling

37-way D-type Socket with crimp pins	**10-962-001**

Latest Details

Please refer to our Web Site for Latest Product Details.
www.pickeringtest.com

Operating/Storage Conditions

Operating Conditions

Operating Temperature:	0°C to 55°C
Humidity:	Up to 95% non-condensing
Altitude:	5000m

Storage and Transport Conditions

Storage Temperature:	-20°C to +75°C
Humidity:	Up to 95% non-condensing
Altitude:	15000m

© Copyright (2006) Pickering Interfaces. All Rights Reserved
Pickering Interfaces maintains a commitment to continuous product development, consequently we reserve the right to vary from the description given in this data sheet.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP