



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?


Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

High Efficiency PC/104 Power Supply

# HE104-75W

- 75 Watt output
- 6V to 40V DC input range
- +5V, +12V, -12V DC output
- High Efficiency up to 90%
- Extended temperature

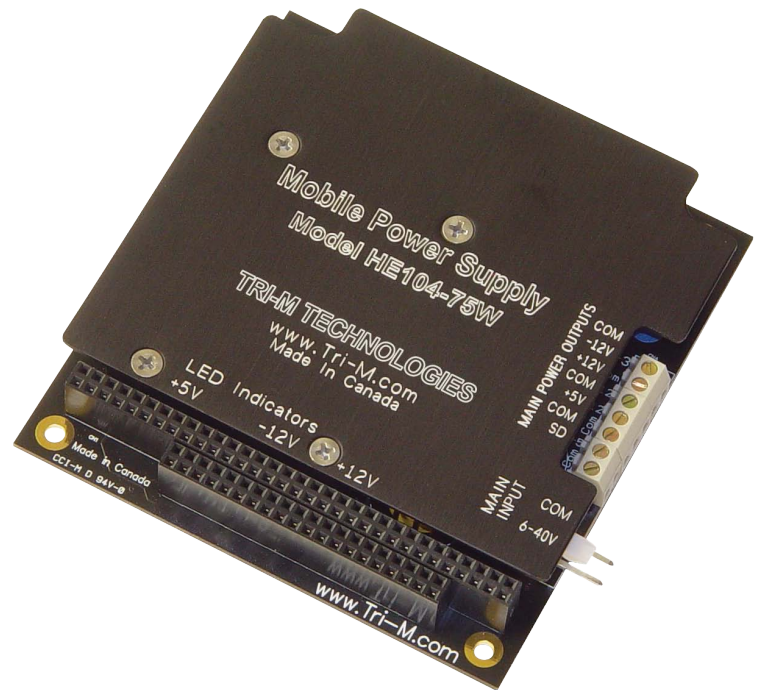

For applications requiring a DC power converter that supplies up to 75W of power, Tri-M offers the HE104-75W. It is ideal for use on 12VDC and 24VDC mobile applications where power from a DC source (input) needs to be converted (output) to match the applications power requirements – generally an embedded computer.

Efficiency of the HE is over 90% - the higher efficiency means less heat is generated – and it is designed to operate in extended temperature applications where temperatures can be between -40°C and +85°C.

Input voltage spikes that go beyond the input voltage window (9VDC to 40VDC) are managed through transient suppressors that restrict the input voltage, while maintaining normal output power operation.

The HE104-75W is designed to minimize any generated noise or interference, allowing it to be used for airborne or ground vehicles that encounter EMI or RFI.

*High Efficiency PC/104 Power Supply***HE104-75W**

## Specifications

**Electrical Specifications**

5V output	15A
12V output	3A
-12V output	0.5A
Input voltage range	6V to 40V DC

**Performance Characteristics**

Load Regulation (5V output)	< 60mV
Line Regulation (5V output)	40mV
Output temp. drift (5V output)	< 40mV
Switching Frequency	312kHz
Output Ripple (5V output)	< 20mV
Conducted Susceptibility (5V output)	> 57db
Efficiency	Up to 90%
Temperature range	-40° to 85°C

**Environmental & Mechanical**

Temperature Range*	-40° to 85°C
Form Factor	PC/104
Dimensions (excluding PC/104 pins)	3.55"W x 3.75"L x 0.6"H
Weight	6.08oz / 172.37g

\*As measured on heatsink

## Ordering Information

**Part Number**

HE104-75W      +5V, +12V, -12V DC outputs, 75 Watt power supply



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)