



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

INSTALLATION GUIDE

IMAQ™ A8014 Camera Cable

This guide describes how to use the National Instruments IMAQ A8014 analog camera cable to connect the PCI/PXI-1409 or PCI-1410 image acquisition (IMAQ) device to a camera.

The IMAQ A8014 cable provides direct connection between the IMAQ 1409/1410 device and the camera without using a breakout box. Use the IMAQ A8014 cable with the following Sony and JAI cameras:

- Sony XC-ES Series
- Sony XC-ST Series
- Sony XC-HR Series
- JAI A-Series



Note Refer to the Sony and JAI Web sites and documentation for information about the functionality of these cameras.

Getting Started

The following items are necessary for connecting the IMAQ A8014 cable:

- IMAQ A8014 cable
- IMAQ A8014 Camera Cable Installation Guide*
- IMAQ 1409 device and documentation
- or
- IMAQ PCI-1410 device and documentation
- Camera and documentation



Connecting the IMAQ A8014 Cable

Complete the following steps to connect the IMAQ A8014 cable to the IMAQ 1409/1410 device and camera. Refer to Figure 1 for an illustration of the IMAQ A8014 cable.

1. Connect the 68-pin male VHDCI connector to the connector on the IMAQ 1409/1410 device and tighten the thumbscrews.
2. Connect the 12-pin male Hirose connector to the camera power supply.
3. Connect the 12-pin female Hirose connector to the input receptacle on the camera.

Optional Connections

1. Connect the external trigger to the **Ext. Trig 0** BNC.
2. Connect any device requiring general-purpose digital input/output, such as a strobe light, to the **Ext. Trig 1** BNC.

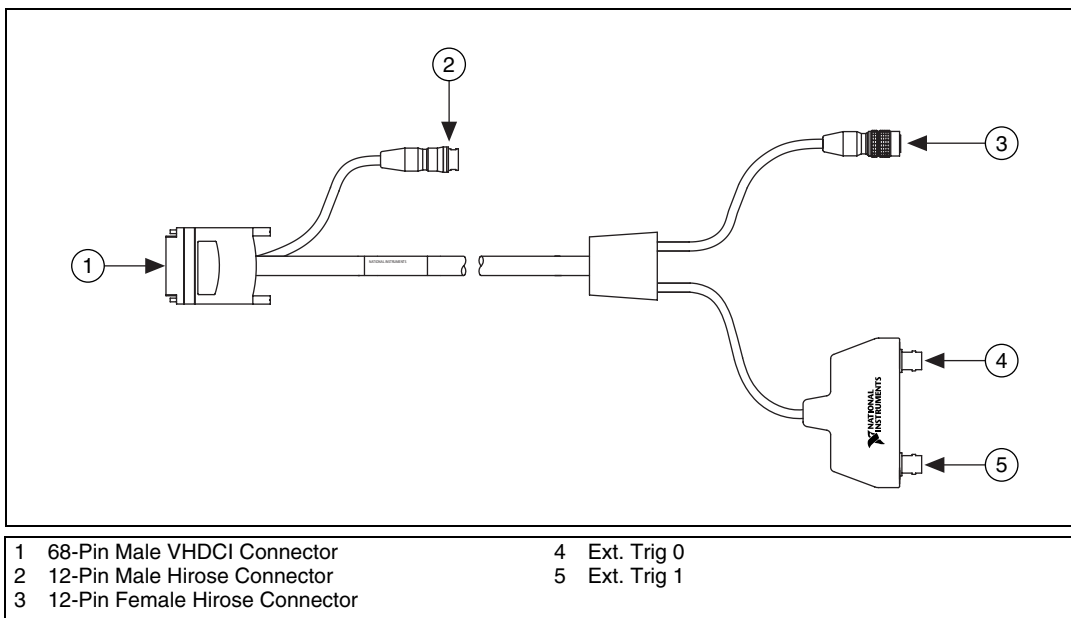


Figure 1. IMAQ A8014 Cable

Connectors

The 68-pin VHDCI connector provides connection to the IMAQ 1409/1410 device, and the 12-pin Hirose connectors provide connection to the camera. Figures 2 and 3 show the pinouts for these connectors.

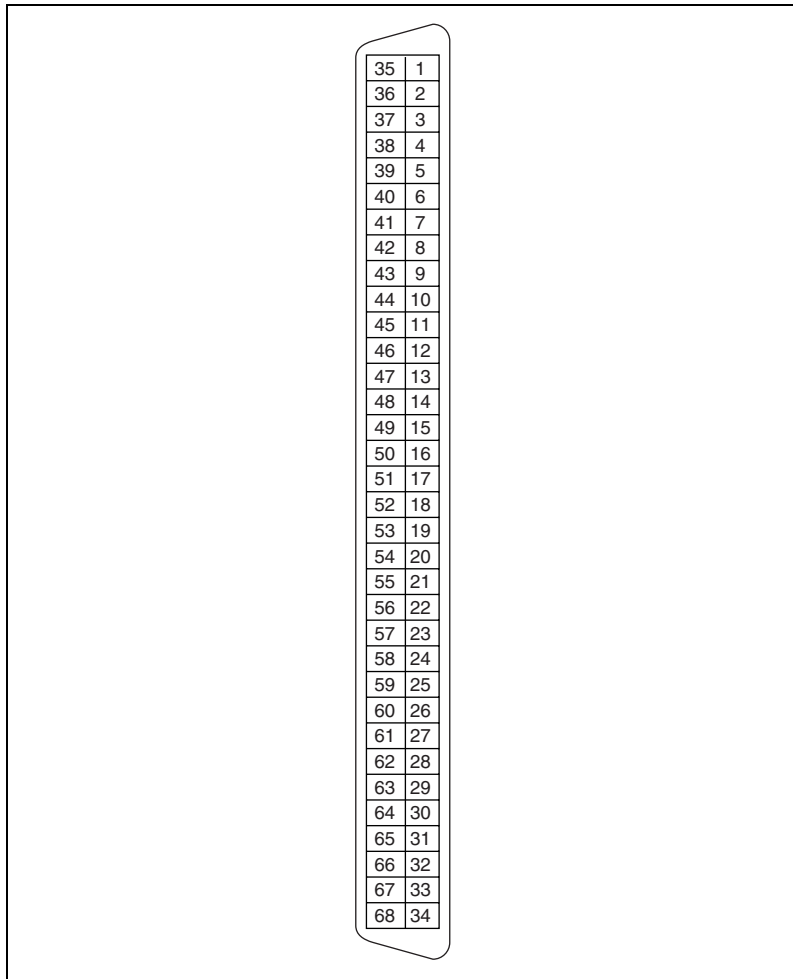


Figure 2. 68-Pin VHDCI Connector (Cable)

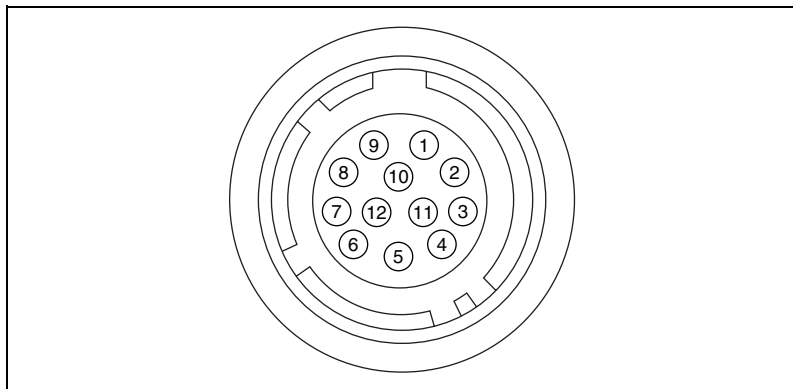


Figure 3. Hirose Connector (Cable)

Pin Assignments

Table 1 shows the pin assignments for the connectors on the IMAQ A8014 cable.

Table 1. IMAQ A8014 Connector Pin Assignments

Signal	68-Pin VHDCI	12-Pin Male Hirose (to Power Supply)	12-Pin Female Hirose (to Camera)	Ext. BNC 0	Ext. BNC 1
VIDEO(0) +	68	—	4	—	—
VIDEO(0) –	67	—	3	—	—
HSYNC_IN +	16	—	6	—	—
DGND	26	—	5	—	—
VSYNC_IN +	15	—	10	—	—
DGND	2	—	8	—	—
PCLK_IN +	3	—	9	—	—
DGND	39	—	8	—	—
TRIG(3)	5	—	11	—	—
DGND	41	—	12	—	—
TRIG(0)	8	—	—	Center	—
DGND	42	—	—	Shield	—
TRIG(1)	7	—	—	—	Center
DGND	39	—	—	—	Shield
DC +12V	—	2	2	—	—
DGND	—	1	1	—	—

Triggering

You can use the IMAQ A8014 cable for applications requiring precise triggering or exposure control. In addition to connecting the video signal between the camera and the IMAQ 1409/1410 device, the IMAQ A8014 cable also connects the camera control lines on the IMAQ 1409/1410 to the exposure and trigger inputs on the camera. The IMAQ 1409/1410 can then be programmed to generate precise timing pulses for controlling the camera.



Tip Visit the National Instruments Camera Advisor Web site at ni.com/camera for application notes and sample code for many of the cameras the IMAQ A8014 supports.

National Instruments, NI, ni.com, and LabVIEW are trademarks of National Instruments Corporation. Refer to the *Terms of Use* section on ni.com/legal for more information about National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your CD, or ni.com/patents.

© 2003–2005 National Instruments Corporation. All rights reserved.

373484B-01

Feb05



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com