

Racal 1261AH

## 13-Slot High-Performance, High-Power VXI Mainframe



**In Stock**

**Used and in Excellent Condition**

**Open Web Page**

<https://www.artisanng.com/52959-6>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**


(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

- **13-slot, C-size Chassis-  
Most Practical Choice for  
ATE**
- **Two Different Power  
Configurations-Meets the  
Demands of Any Test System**
- **Jumperless, 12-Layer  
Backplane--Combines  
Simplified System  
Configuration with Optimum  
Electrical Performance**

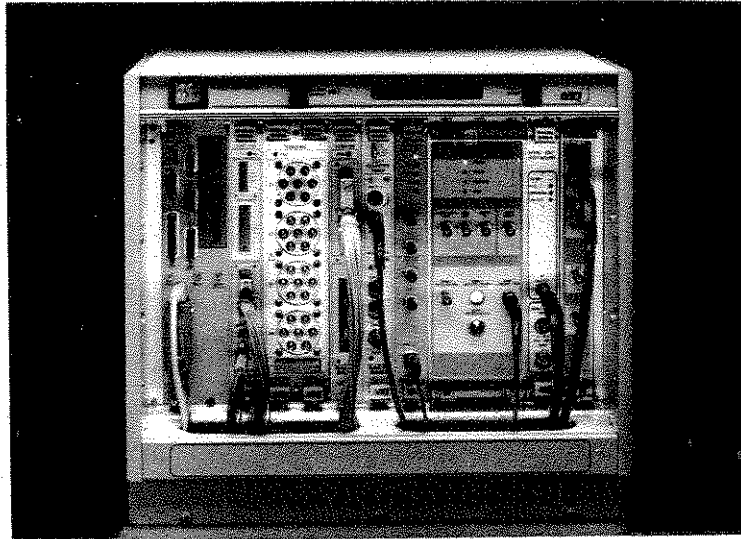

- **Intelligent System Monitor - Allows Local and Remote System Monitoring of  
Power Supplies, Temperature and Airflow**
- **70 Watts of Cooling per Slot Ensures High System Reliability**
- **New Air Guide Delivers More Air Through the Module**

#### **Power**

Model 1261A has the ability to meet virtually any system requirement. With medium- and high-power options, the 1261A offers the most flexible power solution of any mainframe. This flexibility allows selection of the best chassis for a specific application. Upgrades to higher power supplies can easily be achieved.

The chassis can also be provided without power supplies; allowing the user to utilize external power such as linear supplies or DC/DC converters for special power requirements.

Racal Instruments specifies only Total Usable Power, which is the maximum power output that meets the noise and ripple limits of the VXIbus specifications. When comparing specifications

from different manufacturers, always refer to usable power. Also ensure that this power is indeed usable over the full temperature range. The 1261A's specified Total Usable Power is valid over 0°C - 55°C.

Power supplies are mounted directly on a hinged rear panel. This provides access to the DC supplies and the backplane to ease maintenance operations. All power supplies are protected against over voltage, over current and over temperature faults.

#### **Monitoring**

Optional intelligent system monitoring capabilities are embedded in the chassis without occupying a VXIbus slot. A front panel LCD indicates system status and faults, and a

resettable, audible alarm is activated when faults are detected. The intelligent monitor continuously checks all power supplies, system airflow and temperature. Remote access is achieved via a GPIB link.

### **Cooling**

The 1261A is cooled by a positive pressure cooling system. Two constant-speed impellers pressurize a plenum chamber in the chassis. A metered plate ensures equal airflow to each slot, independent of the number of installed modules. Constant full-speed airflow ensures adequate cooling regardless of loading. In addition, it offers the most efficient cooling practice for partially populated chassis. This approach also avoids any thermal run-away problems associated with module hot spots. The use of backward curved impellers virtually eliminates blade passage frequencies and results in significantly lower fan noise.

A new air guide system ensures that more air flows into the module and does not vent around the module as with conventional card guides. Also provided are snap on covers to divert air from unpopulated slots to areas where extra cooling can be used.

The 1261A chassis provides for cool air intake from the sides, and air exhaust to the rear of the unit. This is the recognized as the standard for rack-mounted systems, and ensures that when the chassis is mounted in a rack, the whole system is thermally managed. The chassis does not use heated air from other instruments nor does it exhaust into neighboring equipment air intakes. Washable, reusable air filters provide clean air. Filters are accessible from the rear.

### **Cable Trays**

The 1261A also features an integrated cable tray to ease cable routing and VXI chassis interfacing. Holes in the bottom and sides of the cable tray further facilitate cable routing to other instruments. The front of the chassis is recessed to accommodate cable bending radius and allow interface connectors to be concealed, away from the front of the system.

For systems that may need many cables to pass through the chassis to a high-density interface, optional deep cable trays can be provided.

### **Backplane**

The 12-layer, auto configurable backplane of the 1261A provides optimum bus performance. Two ground planes are utilized for +5V and -5.2V supply lines, resulting in low voltage gradients across the backplane. All ECL and TTL signals use stripline technology, minimizing crosstalk and monitoring controlled impedances. To provide maximum bandwidth and isolation, the Smbus lines are completely enclosed.

## 1261A SPECIFICATIONS

### Power Supply Input

115 VAC  $\pm$  10% or  
230 VAC  $\pm$  10%

### AC Line Frequency

47 to 63 Hz

### Power Supply Protection

Short circuit, over-voltage, reverse voltage and  
thermal shutdown

### Max Input Power

1400 VA

### Cooling

70 Watts/Slot, 10°C rise

### Temperature Range

Operating: 0°C to 55°C  
Storage: -40°C to 70°C

### Mainframe Size

C-size, 13 slots

### Dimensions (HxWxD)

15.75" X 17.5" X 26.75"  
14.00" X 17.5" X 26.75" without  
cable tray

### Weight

1261AM 62 lbs.  
1261AH 68 lbs.

### Acoustic Noise

45 dBA at full airflow

### Backplane

12 Layer, auto configuring

### Crosstalk

Worst case data line to SUMBUS: -54dB

### Noise Floor

-100dB (1Hz bandwidth)

### SUMBUS Bandwidth

125MHz

### Environmental

MIL-T-28800 Type III,  
Class 5, Style F

### Safety

UL1950, CSA22.2  
TUV EN 60950

### DC Power:

|                    |                           | Total Usable Power 0°C - 55°C, 500 Watts |     |      |      |     |     | Peak Power = 775 Watts |
|--------------------|---------------------------|------------------------------------------|-----|------|------|-----|-----|------------------------|
| 1261AM             |                           | +24                                      | +12 | +5   | -5.2 | -2  | -12 | -24                    |
| Dynamic<br>Current | Ripple/Noise<br>150mV     | 2.5                                      | 2.0 | 7.5  | 7.5  | 2.2 | 2.0 | 2.5                    |
|                    | Ripple/Noise 50mV         | 1.0                                      | 0.7 | 3.0  | 2.7  | 0.8 | 0.7 | 1.0                    |
|                    | Peak Current ( $I_{mp}$ ) | 3.0                                      | 5.0 | 45.0 | 45.0 | 5.0 | 4.5 | 5.0                    |

|                    |                           | Total Usable Power 0°C - 55°C, 800 Watts |      |      |      |      |      | Peak Power = 1352 Watts |
|--------------------|---------------------------|------------------------------------------|------|------|------|------|------|-------------------------|
| 1261AH             |                           | +24                                      | +12  | +5   | -5.2 | -2   | -12  | -24                     |
| Dynamic<br>Current | Ripple/Noise<br>150mV     | 6.0                                      | 5.0  | 11.0 | 11.0 | 3.5  | 5.0  | 6.0                     |
|                    | Ripple/Noise 50mV         | 3.0                                      | 2.0  | 5.0  | 5.0  | 1.3  | 2.0  | 3.0                     |
|                    | Peak Current ( $I_{mp}$ ) | 12.0                                     | 12.0 | 60.0 | 60.0 | 10.0 | 12.0 | 6.0                     |



Not a VXI Specification



VXIbus Specification

# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisanth.com](https://www.artisanth.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisanth.com](mailto:sales@artisanth.com) | [artisanth.com](https://www.artisanth.com)

