

Racal 1260-131B

High-Density Multiplexer Plug-In



In Stock

Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/57614-21>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.



High-Density Multiplexer Plug-In

- ◆ **Twenty-Six SP4T's**
- ◆ **200 MHz Bandwidth**
- ◆ **Switches up to 2 A**
- ◆ **Standard Adapt-a-Switch® Plug-In Designed for Ease of Replacement**
- ◆ **Ideal for Single-ended Audio, Video, Telecom, or General-Purpose Switching**

Racal Instruments 1260-131A/B is a general-purpose, SP4T binary tree with a 200MHz bandwidth (-3dB). The 1-Amp "A" version is for lower density/cost. It has 10 channels of SP4T and uses a low cost IDC style DIN connector, so the interface cabling can be either crimp and poke or ribbon style. The 2 Amp "B" version is for higher density applications and it has 26 channels of SP4T.

Designed for the Adapt-a-Switch® platform, this plug-in installs easily and directly from the front panel into the Adapt-a-Switch® VXIbus Carrier, Racal Instruments 1260-100 or 1260-101, or Racal Instruments 1256 GPIB/Ethernet Switching System. Please refer to the corresponding literature for specifications and product features.

When multiple 1260-131 units are used in the 1260-100, up to 156 SP4T channels are available, and when used in the 1256 switching system up to 208 SP4T channels are available. The 1260-131A/B is ideal for general purpose switching or can be mixed and matched with other cards in the 1260-1XX family to create application specific configurations.

Racal Instruments Option-01T interface (for VXI) controls the 1260-131A/BA using either register-based or message-based commands. The 1256 (for GPIB/Ethernet) supports message-based operations. Refer to the Option-01T/1256 literature for more information about product specifications and features such as include, exclude scan lists, user-defined path names and reset states

Racal Instruments Adapt-a-Switch® series includes VXIplug&play support of WIN98/NT/2000/XP frameworks, including drivers for LabWindows/CVI and LabVIEW for VXI applications.

1260-131A/B PRODUCT SPECIFICATIONS

INPUT

Maximum Switching Voltage
300 VDC or 300 VAC

Maximum Switching Current
2 ADC or 2 AAC, 1260-131B
1 ADC or 1 AAC, 1260-131A

Maximum Switching Power
60 W, 125 VA, 1260-131B
30 W, 125 VA, 1260-131A

DC PERFORMANCE

Initial Path Resistance
 $\leq 400 \text{ m}\Omega$

Thermal EMF
 $\leq 6 \text{ }\mu\text{V}$

Insulation Resistance
 $\geq 109 \text{ }\Omega$

AC PERFORMANCE

Bandwidth (-3 dB, 50 Ω)
 $\geq 200 \text{ MHz}$

Insertion Loss (50 Ω)
1 MHz: $\leq 0.1 \text{ dB}$
10 MHz: $\leq 0.2 \text{ dB}$

Isolation (50 Ω)
1 MHz: $\geq 60 \text{ dB}$
10 MHz: $\geq 40 \text{ dB}$

Crosstalk (50 Ω)
1 MHz: $\leq -60 \text{ dB}$
10 MHz: $\leq -40 \text{ dB}$

Capacitance
Channel-Ground: $\leq 60 \text{ pF}$
Open Channel: $\leq 5 \text{ pF}$

INTERFACE DATA

Cooling
See 1260-100 or 1256 Cooling data

Power Requirements
+5VDC at 150 mA plus 30 mA per energized relay (1.7 A max)

ENVIRONMENTAL DATA

Temperature
Operating: 0°C to 55°C
Storage: -40°C to 75°C

Relative Humidity
85% \pm 5% non-condensing, $\leq 30^\circ\text{C}$

Altitude
Operating: 10,000 ft.
Non-Operating: 15,000

Shock
30 g, 11 ms, 1/2 sine wave

Vibration
0.013 in.: pk-pk, 5-55 Hz

Bench Handling
4-inch drop at 45°

EMC
EN61326:1997+A1:1998; Class A

SAFETY
EN61010-1:1993+A2:1995

RELIABILITY

Switching Time
 $\leq 3 \text{ ms}$ (includes settling time)

Rated Switch Operations
Mechanical: 1×10^8
Electrical: 1×10^6 @ 50 V, 0.1 A
 1×10^6 @ 10 V, 10 mA

MTBF (not including relays)
822,885 hours (MIL-STD-21/E)


MTTR
 $\leq 5 \text{ min}$

MECHANICAL

Weight
1260-131B: 9 oz. (0.26 kg.)
1260-131A: 6 oz. (0.17 kg.)

Dimensions
4.5" H x 0.75"W x 9.5" D

Front Panel I/O Interface Connector
1260-131B: 1-160 pin DIN
1260-131A: 1- 64 pin DIN

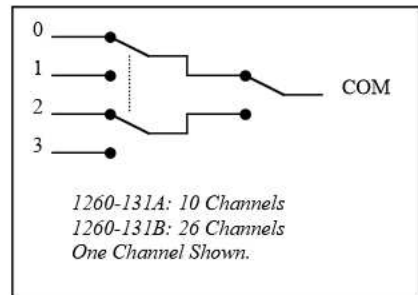

CE The CE Mark indicates that the product has completed and passed rigorous testing in the area of RF Emissions, Immunity to Electromagnetic Disturbances and complies with European electrical safety standards.

ORDERING INFORMATION

MODEL/DESCRIPTION

Racal Instruments 1260-131B, Adapt-a-Switch Module, 26-1x4 One-wire Muxes, 2A
64-pin DIN IDC Connector
64-pin DIN Crimp Connector Body
64-pin DIN Crimp Pins
160-pin Connector Kit w/pins
160-pin Cable Assembly, 6ft., 24 AWG

PART NUMBER

407812-002
602004
602159-064
602159-900
407664
407408-001

The EADS North America Defense Test and Services policy is one of continuous development, consequently the equipment may vary in detail from the description and specification in this publication.



EADS North America Defense Test and Services
1.800.722.2528/1.949.859.8999 sales@eads-nadefense.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanTG.com | [artisanTG.com](https://www.artisanTG.com)

