

Racal 1260-16

## Relay Actuator Module



**In Stock**

**Used and in Excellent Condition**

**Open Web Page**

<https://www.artisanng.com/64409-1>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**


(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

### Relay Actuator Module Model 1260-16

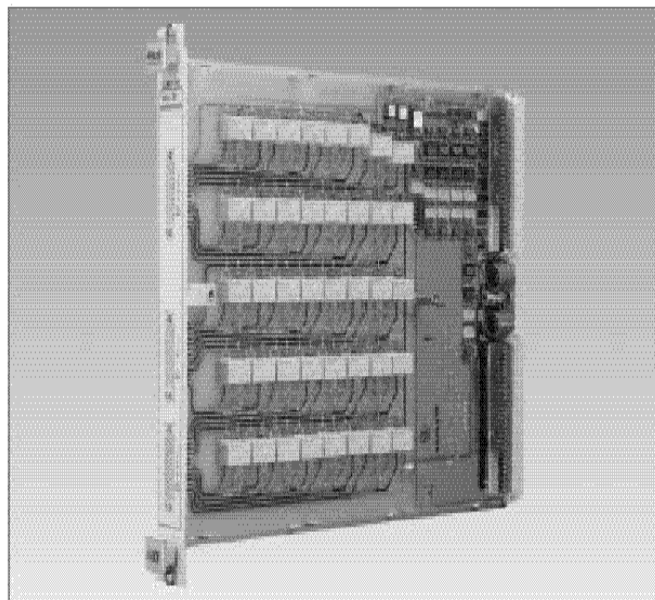

- ◆ **Ideal for General-purpose Switching and Control of External Devices**
- ◆ **Each Channel Switches up to 5A and 30 VDC or 250 VACrms**
- ◆ **Individual Relays can be Easily Configured to Meet User-defined Network Requirements**
- ◆ **High Density, Configured as 40 Channels of Independent SPDT Switches**

The Model 1260-16 is designed for general purpose signal switching and control of external devices. The module provides 40 channels of SPDT switches. Custom relay switch networks may be configured with some relays while all remaining channels continue independent operation.

The actuator module permits switching up to 5 amps at 30 VDC or 250 VACrms per channel. Higher DC voltage may be switched at lower currents.

The Model 1260-16 module has provision for adding a fuse or components for surge suppression.

Relay coils are monitored to provide user selectable confidence checking, which gives the user additional assurance of proper relay operation.

The 1260-16 is controlled by the Option 01 message-based interface which is explained in detail on the Smart Card Module page. All 1260 control features explained on that page are available to this module.

# 1260-16 SPECIFICATIONS

## Maximum Switchable Voltage

(Terminal-Terminal or Terminal-Chassis)  
110VDC or 250VACrms

## Maximum Switchable Current

Per Channel: 5ADC or ACrms

## Maximum Switchable Power

Per Channel: 150W DC, 1250VA

## DC PERFORMANCE

### Path Resistance

<200mΩ

### Isolation

>10<sup>9</sup> Ω

## AC PERFORMANCE (into 50Ω)

### Capacitance

Open Channel: <100pF

### Bandwidth (-3dB)

30MHz (typical)

### Insertion Loss

100kHz: <0.25dB

1MHz: <0.5dB

10MHz: <1dB

### Crosstalk

100kHz: <-40dB

1MHz: <-35dB

10MHz: <-15dB

### Isolation

100kHz: >30dB

1MHz: >20dB

10MHz: >15dB

## VXIbus INTERFACE DATA

### Cooling Requirements

Airflow: 4.0 liters/sec

Back pressure: 0.5mm H<sub>2</sub>O

### Power Requirements

+5V: 0.4A(2.8A with Option 01 installed)

+24V: 10mA per relay (energized)

### Weight

2.77 lb. (1.25 kg) without Option 01

3.05 lb. (1.37 kg) with Option 01

### Dimensions

C-size, Single-slot VXIbus Module

### Typical Programming Syntax


Programming Syntax is in the form:

"<Module Address> . <Channel>"

Example: CLOSE 2.21

This CLOSE statement will close relay number 21 on the 1260-16 at card address 2.

*Note:* Module is supplied with one set of mating connectors. Additional connectors can be ordered using the part number shown below.

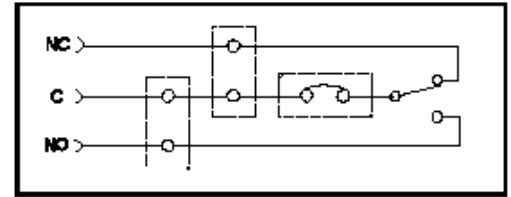

1260-16

## ORDERING INFORMATION

| Model      | Description                                      | Part Number    |
|------------|--------------------------------------------------|----------------|
| 1260-16    | 40 Channel SPDT at 5Amps                         | 407348         |
| Option 01* | Smart Card Module (installed)                    | OPT-401901-005 |
| 601855-050 | 50-Pin User Connector Body Part (3 supplied)     | 601855-050     |
| 601857     | 50-Pin Connector Solder Type Pins (150 Supplied) | 601857         |
| 9099-1     | Insertion Tool                                   | 9099-1         |
| 9081-1     | Extraction Tool                                  | 9081-1         |

\*One Option 01 must be ordered with switch system. Please specify the card on which Option 01 will be installed

**CE** The CE Mark indicates that the product has completed and passed rigorous testing in the area of RF Emissions, Immunity to Electromagnetic Disturbances and complies with European electrical safety standards

The Racal policy is one of continuous development: consequently, the equipment may vary in detail from the description and specification in this publication

**Racal Instruments Inc.**, 4 Goodyear St., Irvine, CA 92618-2002. Tel: (800) 722 2528, (949) 859 8999; FAX: (949) 859 7139

**Racal Instruments Group Ltd.**, 29-31 Cobham Road, Wimborne, Dorset, BH21 7PF, United Kingdom. Tel: +44 (0) 1202872800; FAX: +44 (0) 1202870810

**Racal Instruments France**, 18 Avenue Dutarte, 78150 LeChesnay, France. Tel: +33 (1) 3923 2222; FAX: +33 (1) 3923 2225

**Racal Instruments Srl**, Via Milazzo 25, 20092 Cinisello Balsamo, Milan, Italy. Tel 00-3902-612 3901, Fax 00-3902-612 93606

**Racal Instruments GmbH**, Technologiepark Bergisch Gladbach, Friedrich-Ebert-Strasse, D-51429 Bergisch Gladbach, Germany. Tel: +49 2204 8442 00, FAX: +49 2204 8442 19



# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisanTG.com](mailto:sales@artisanTG.com) | [artisanTG.com](https://www.artisanTG.com)

