



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

## Product Brief (Preliminary)

The BenADDA-PRO is an addition to the popular BenADDA product range, providing high-speed analogue data processing combined with the impressive features the DIME-II product family module with support for PCI, cPCI, VME, & PC/104+ form factors



### Key Features

- ▶ Single width DIME-II module
- ▶ Xilinx® Virtex-II Pro® User FPGA (P50)
- ▶ Up to 53k logic cells of programmable logic per module
- ▶ Up to 4X Block RAM and embedded multipliers compared to equivalent Virtex®-II FPGAs
- ▶ 400+ Module-to-Motherboard DIME-II User I/O
- ▶ Multiple clocking options – 4 internal clocks, external clock input
- ▶ 8Mbytes ZBT® SRAM – arranged in 2 independent banks
- ▶ On-board PowerPC processor support
- ▶ Supported in Nallatech DIMEtalk™ and FUSE™
- ▶ Includes Nallatech ZBT SRAM interface IP core

# BenADDA-PRO

## Processing Module

### User Benefits

- ✓ Virtex-II PRO FPGA
- ✓ 2 x 14-bit ADC channels supporting maximum sample rate of 105MSPS
- ✓ 2 x 14-bit DAC channels supporting maximum sample rate of 160MSPS
- ✓ Provides scalability – deploy multiple modules on a single DIME-II motherboard
- ✓ Based on the proven DIME-II standard
- ✓ Supported by FUSE™ & DIMEtalk™ for easy FPGA design implementation

### Overview

The BenADDA-PRO DIME-II module is an addition to the BenADDA product family providing high-speed analogue data processing capabilities with a Xilinx® Virtex-II Pro® FPGA.

### Dual ADC Channels

The BenADDA-PRO is equipped with two AD6645 ADC devices from Analog Devices. The sampled data can be processed directly by the on-board FPGA.

### Dual DAC Channels

The BenADDA-PRO offers flexible high-speed, high-resolution data conversion for both baseband and direct IF applications using two AD9772 devices from Analog Devices, which directly controlled by the on-board FPGA.




# Product Brief

Do you require ordering information or have product questions? Our worldwide sales teams and technical specialists are ready to assist you. Please contact us via one of the methods detailed below...



**NALLATECH**

## Functional Diagram

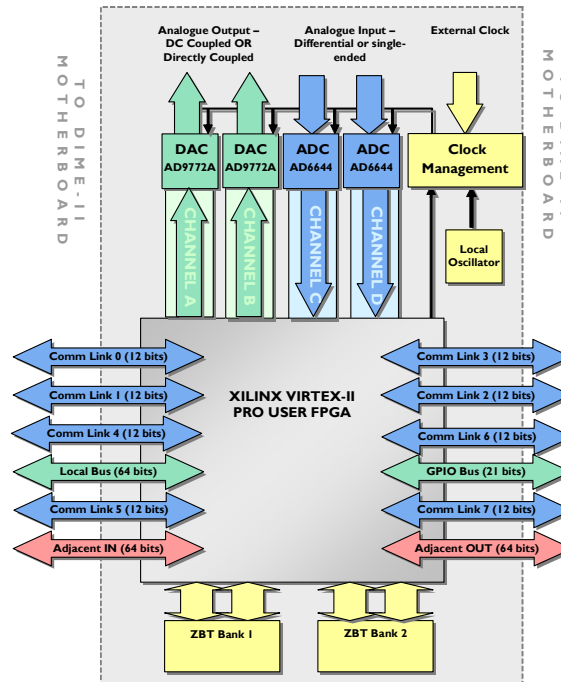

## Bus Support

Bus	2VP50 FPGA
Adjacent In	64-bits
Adjacent Out	64-bits
Local Bus	64-bits
GPIO	21-bits
CommLink 0	12-bits
CommLink 1	12-bits
CommLink 2	12-bits
CommLink 3	12-bits
CommLink 4	12-bits
CommLink 5	12-bits
CommLink 6	12-bits
CommLink 7	12-bits

### NOTES

All DIME-II buses are bi-directional. Where a bus uses a naming convention which indicates it is an in or out bus, this is a conceptual name. Functionally, the bus can be used for either input to the module, output from the module, or a combination of both.

This information should be used in conjunction with the equivalent on other DIME-II products to establish the I/O compatibility between multiple products being used together.

The symbol 'x' indicates that a bus is not supported by an FPGA version.

## Specifications

- XC2VP50 FFI 152 FPGA
- 2 x 14-bit ADC channels up to 105MSPS sampling
- 2 x 14-bit 160MSPS DAC channels
- 8MB ZBT SRAM (2 independent banks of 4MB)
- Status LEDs
- Secondary XC2V80 FPGA for clocking control
- Up to 6 different methods for clocking ADCs/DACs
  - 105MHz on-board crystal oscillator
  - External clock input via front panel connector
  - 3 program oscillators
- Various analogue / output build configurations
  - contact Nallatech for full list of supported build configurations
- 3<sup>rd</sup> order input filter –  $f_c$ , cut-off around Nyquist at 57.9MHz

## Deliverables

- BenADDA PRO Module
- Software and Documentation CD
- 90 days Product Maintenance (software updates, technical support, support lounge access)

## Order Codes

Main order code - BenADDA-PRO-XX-Y

### Option Codes

XX: Analogue I/O build options  
 01 - Op\_Amp (DC) Coupled Outputs + Single-ended Analogue Inputs  
 02 - Op\_Amp (DC) Coupled Outputs + Differential Analogue Inputs  
 03 - Directly Coupled Outputs + Single-ended ADC Inputs  
 04 - Directly Coupled Outputs + Differential Analogue Inputs  
 Y: FPGA speed grade options: -5; -6;

## Contact Details

### Europe & Asia Pacific

Nallatech Ltd  
 Boolean House  
 One Napier Park  
 Cumbernauld  
 Glasgow G68 0BH  
 UK

Phone: +44 (0)1236 789500  
 Fax: +44 (0)1236 789599  
 Email: [contact@nallatech.com](mailto:contact@nallatech.com)

### North America

Nallatech Inc  
 1010 Liberty Road  
 Suite 103  
 Eldersburg  
 MD. 21784  
 USA

Phone: (407) 384 9255  
 Fax: (407) 384 8555  
 Email: [contact@nallatech.com](mailto:contact@nallatech.com)

Nallatech Inc  
 Suite 470  
 226 Airport Parkway  
 San Jose  
 CA 95110  
 USA

Phone : (408) 467 5075  
 Fax : (408) 436 5402  
 Email: [contact@nallatech.com](mailto:contact@nallatech.com)

Copyright © 2004, Nallatech, All rights reserved. BenADDA 2, Nallatech, the Nallatech logo, "The High Performance FPGA Systems Company", DIMEtalk, DIMEscript, DIME, DIME-II and FUSE are trademarks of Nallatech Ltd. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. All other product names, trademarks and registered trademarks are property of their respective holders. Nallatech believes the information contained in this document to be correct at the time of publication and cannot accept responsibility for any loss or damage resulting from the use of this information. All information is subject to change at any time, without notice.



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)