

Revco ULT750-3-A

Value Chest Freezer



Limited Availability
New From Surplus Stock

Open Web Page

<https://www.artisanng.com/69536-2>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

Thermo Scientific Revco Freezers


Our chest and upright freezers share an advanced technology and design platform with three distinct series – Ultima II, Elite and Value – our portfolio offers multiple levels of control sophistication to meet your needs.



Advanced Refrigeration Technology

Our freezers feature the Legaci® refrigeration system with fully integrated cooling technology for ultra-low temperature use. Our Legaci system is more dependable, specifically designed and tested to operate at temperatures from -40°C to -86°C in a rugged laboratory environment without exceeding parameters of any sub-component within the system.

- Our Legaci system meets or exceeds the highest performance standards in accelerated life testing
- Sets a new standard for reliability
- Performs in demanding environments
- Tolerates recurring voltage fluctuations, high ambient temperatures, heavy traffic in/out of freezer

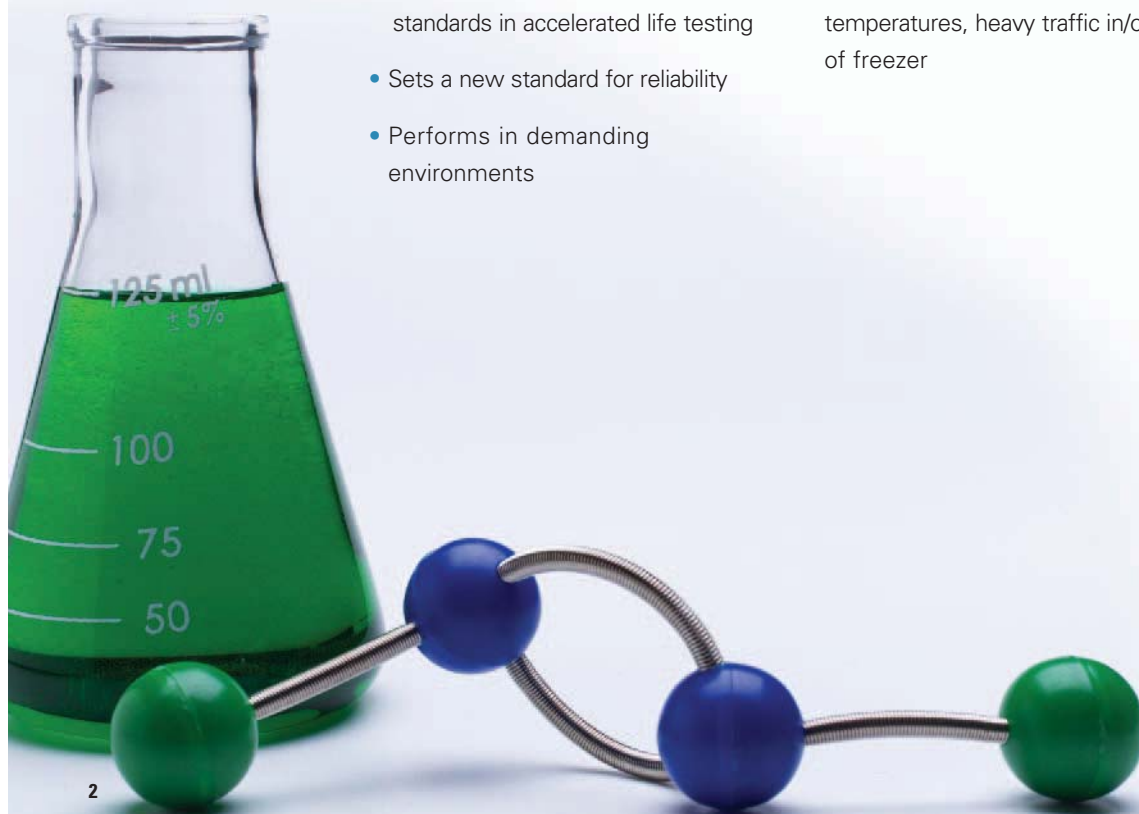

Advanced Cabinet Construction

Outer Door

Minimum 3" (76mm) high-strength, foamed-in-place urethane insulation

Outer Door Hinges

Independently mounted for each door

Access Port

1" diameter (25.4mm) on rear wall, left corner

Inner Doors


High-impact plastic with recessed handle

Interior Shelves

Stainless steel, top shelf fixed, three adjustable

Inventory Racks

Optional, stainless steel with fiberboard boxes and dividers

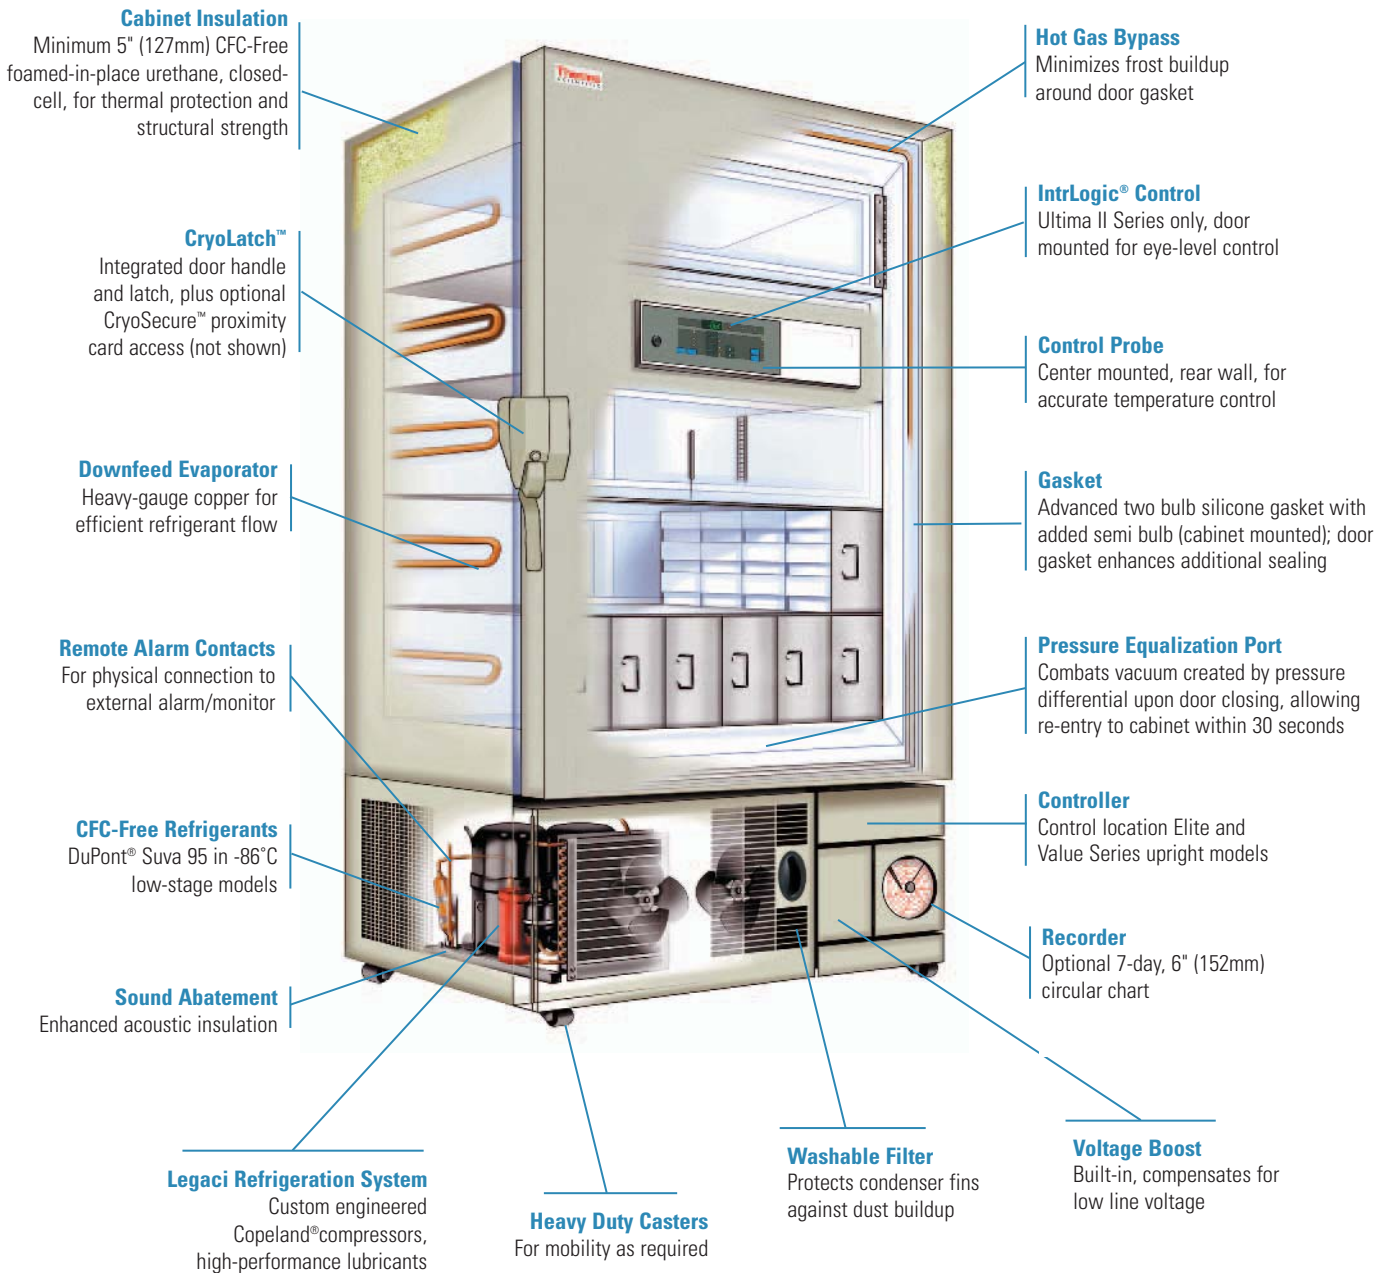

Thermo Scientific Revco Value Freezers

Our Revco Value freezers offer a cost-effective alternative for a variety of industrial process and non-critical storage uses. They feature our Legaci refrigeration with rugged cabinet construction and a reliable solid-state control for basic but dependable operation.



Our Revco Value freezers feature a solid-state control system with keyed on/off switch for security.

Control System

- Solid-state control system with adjustable temperature setpoint
- Digital temperature display
- Push-button setpoint display
- Key-operated main power switch

Electrical System

- Automatic voltage boost compensates for low voltage and brownout conditions
- Optional free-standing surge suppressor minimizes effect of voltage spikes from incoming electrical service

Alarm System

- Integrated overtemperature safety alarm with battery back-up and audible warning of temperature deviation
- Exterior alarm contacts for connection to remote monitoring system

Thermo Scientific Revco Freezers

Revco Value Upright Freezers

Temperature Range: -50°C to -86°C

Model No.	Cu.Ft. (L)	Electrical	Amps/ Breaker (Plug)	Interior Dimensions* H x D x W inches (mm)	Exterior Dimensions* H x D x W inches (mm)	Ship Weight lb (kg)
ULT-1386-3-A	13.4 (379)	115V 60Hz 1Ø	16/20 (P2)	50.5 x 19.5 x 23.5 (1280 x 500 x 600)	77.5 x 31.3 x 37.1 (1970 x 796 x 942)	655 (297)
ULT-1386-3-D	13.4 (379)	208/230V 60Hz 1Ø	7.5/15 (P4)			
ULT-1386-3-V	13.4 (379)	230V 50Hz 1Ø	7.5/15 (P7)			
ULT-1386-3-W	13.4 (379)	230V 50Hz 1Ø	7.5/15 (P8)			

Revco Value Chest Freezers

Temperature Range: -40°C to -86°C

Model No.	Cu.Ft. (L)	Electrical	Amps/ Breaker (Plug)	Interior Dimensions* H x D x W inches (mm)	Exterior Dimensions* H x D x W inches (mm)	Ship Weight lb (kg)
ULT-390-3-A	3.1(88)	115V 60Hz 1Ø	16/20 (P2)	17.0 x 17.0 x 19.0 (430 x 430 x 480)	44.5 x 29.9 x 30.2 (1156 x 760 x 766)	415 (188)
ULT-390-3-D	3.1(88)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-390-3-V	3.1(88)	230V 50Hz 1Ø	12/16 (P7)			
ULT-390-3-W	3.1(88)	230V 50Hz 1Ø	12/13 (P8)			
ULT-790-3-A	6.8 (193)	115V 60Hz 1Ø	16/20 (P2)	26.5 x 19.0 x 23.5 (670 x 480 x 600)	41.0 x 31.8 x 48.5 (1040 x 808 x 1230)	525 (238)
ULT-790-3-D	6.8 (193)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-790-3-V	6.8 (193)	230V 50Hz 1Ø	12/16 (P7)			
ULT-790-3-W	6.8 (193)	230V 50Hz 1Ø	12/13 (P8)			
ULT-1090-3-A	10.3 (292)	115V 60Hz 1Ø	16/20 (P2)	26.5 x 19.0 x 32.25 (670 x 480 x 900)	41.0 x 31.8 x 60.25 (1040 x 808 x 1530)	680 (308)
ULT-1090-3-D	10.3 (292)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-1090-3-V	10.3 (292)	230V 50Hz 1Ø	12/16 (P7)			
ULT-1090-3-W	10.3 (292)	230V 50Hz 1Ø	12/13 (P8)			
ULT-1490-3-A	13.7 (388)	115V 60Hz 1Ø	16/20 (P2)	26.5 x 19.0 x 47.0 (670 x 480 x 1190)	41.0 x 31.8 x 72.0 (1040 x 808 x 1830)	650 (295)
ULT-1490-3-D	13.7 (388)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-1490-3-V	13.7 (388)	230V 50Hz 1Ø	12/16 (P7)			
ULT-1490-3-W	13.7 (388)	230V 50Hz 1Ø	12/13 (P8)			
ULT-1790-3-A	17.1 (484)	115V 60Hz 1Ø	16/20 (P2)	26.5 x 19.0 x 58.75 (670 x 480 x 1490)	41.0 x 31.8 x 83.75 (1040 x 808 x 2130)	770 (350)
ULT-1790-3-D	17.1 (484)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-1790-3-V	17.1 (484)	230V 50Hz 1Ø	12/16 (P7)			
ULT-1790-3-W	17.1 (484)	230V 50Hz 1Ø	12/13 (P8)			
ULT-2090-3-A	20.5 (580)	115V 60Hz 1Ø	16/20 (P2)	26.5 x 19.0 x 70.5 (670 x 480 x 1790)	41.0 x 31.8 x 95.5 (1040 x 808 x 2430)	940 (427)
ULT-2090-3-D	20.5 (580)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-2090-3-V	20.5 (580)	230V 50Hz 1Ø	12/16 (P7)			
ULT-2090-3-W	20.5 (580)	230V 50Hz 1Ø	12/13 (P8)			

*All dimensions and specifications subject to change without notice. External dimensions include allowances for cabinet door, hinges, latches, handles, and control panel protrusions.

Our freezers share a standardized inventory configuration of optional racks, boxes and baskets. Chest and upright inventory systems are ordered separately.



Revco Value Upright Freezers

Temperature Range: -10°C to -40°C

Model No.	Cu.Ft. (L)	Electrical	Amps/ Breaker (Plug)	Interior Dimensions* H x D x W inches (mm)	Exterior Dimensions* H x D x W inches (mm)	Ship Weight lb (kg)
ULT-1340-3-A	13.4 (379)	115V 60Hz 1Ø	16/20 (P2)	50.5 x 19.5 x 23.5 (1280 x 500 x 600)	77.5 x 31.3 x 37.1 (1970 x 796 x 942)	595 (270)
ULT-1340-3-D	13.4 (379)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-1340-3-V	13.4 (379)	230 V 50Hz 1Ø	12/16 (P7)			
ULT-1340-3-W	13.4 (379)	230V 50Hz 1Ø	12/13 (P8)			
ULT-1740-3-A	17.2 (487)	115V 60Hz 1Ø	16/20 (P2)	50.5 x 25 x 23.5 (1280 x 640 x 600)	77.5 x 36.8 x 37.1 (1970 x 935 x 942)	630 (286)
ULT-1740-3-D	17.2 (487)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-1740-3-V	17.2 (487)	230V 50Hz 1Ø	12/16 (P7)			
ULT-1740-3-W	17.2 (487)	230V 50Hz 1Ø	12/13 (P8)			
ULT-2140-3-A	20.2 (572)	115V 60Hz 1Ø	16/20 (P2)	50.5 x 24.25 x 28.5 (1280 x 620 x 720)	77.5 x 36.1 x 42.2 (1970 x 916 x 1070)	680 (309)
ULT-2140-3-D	20.2 (572)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-2140-3-V	20.2 (572)	230V 50Hz 1Ø	12/16 (P7)			
ULT-2140-3-W	20.2 (572)	230V 50Hz 1Ø	12/13 (P8)			
ULT-2540-3-A	24.4 (691)	115V 60Hz 1Ø	16/20 (P2)	50.5 x 24.25 x 34.5 (1280 x 620 x 880)	77.5 x 36.1 x 48.1 (1970 x 916 x 1222)	770 (350)
ULT-2540-3-D	24.4 (691)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-2540-3-V	24.4 (691)	230V 50Hz 1Ø	12/16 (P7)			
ULT-2540-3-W	24.4 (691)	230V 50Hz 1Ø	12/13 (P8)			

Revco Value Chest Freezers

Temperature Range: -10°C to -40°C

Model No.	Cu.Ft. (L)	Electrical	Amps/ Breaker (Plug)	Interior Dimensions* H x D x W inches (mm)	Exterior Dimensions* H x D x W inches (mm)	Ship Weight lb (kg)
ULT-350-3-A	3.1(88)	115V 60Hz 1Ø	16/20 (P2)	17.0 x 17.0 x 19.0 (430 x 430 x 480)	44.5 x 29.9 x 30.2 (1156 x 760 x 766)	355 (161)
ULT-350-3-D	3.1(88)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-350-3-V	3.1(88)	230V 50Hz 1Ø	12/16 (P7)			
ULT-350-3-W	3.1(88)	230V 50Hz 1Ø	12/13 (P8)			
ULT-750-3-A	6.8 (193)	115V 60Hz 1Ø	16/20 (P2)	26.5 x 19.0 x 23.5 (670 x 480 x 600)	41.0 x 31.8 x 48.5 (1040 x 808 x 1230)	470 (213)
ULT-750-3-D	6.8 (193)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-750-3-V	6.8 (193)	230V 50Hz 1Ø	12/16 (P7)			
ULT-750-3-W	6.8 (193)	230V 50Hz 1Ø	12/13 (P8)			
ULT-1050-3-A	10.3 (292)	115V 60Hz 1Ø	16/20 (P2)	26.5 x 19.0 x 32.25 (670 x 480 x 900)	41.0 x 31.8 x 60.25 (1040 x 808 x 1530)	500 (227)
ULT-1050-3-D	10.3 (292)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-1050-3-V	10.3 (292)	230V 50Hz 1Ø	12/16 (P7)			
ULT-1050-3-W	10.3 (292)	230V 50Hz 1Ø	12/13 (P8)			
ULT-1450-3-A	13.7 (388)	115V 60Hz 1Ø	16/20 (P2)	26.5 x 19.0 x 47.0 (670 x 480 x 1190)	41.0 x 31.8 x 72.0 (1040 x 808 x 1830)	650 (295)
ULT-1450-3-D	13.7 (388)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-1450-3-V	13.7 (388)	230V 50Hz 1Ø	12/16 (P7)			
ULT-1450-3-W	13.7 (388)	230V 50Hz 1Ø	12/13 (P8)			
ULT-1750-3-A	17.1 (484)	115V 60Hz 1Ø	16/20 (P2)	26.5 x 19.0 x 58.75 (670 x 480 x 1490)	41.0 x 31.8 x 83.75 (1040 x 808 x 2130)	650 (295)
ULT-1750-3-D	17.1 (484)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-1750-3-V	17.1 (484)	230V 50Hz 1Ø	12/16 (P7)			
ULT-1750-3-W	17.1 (484)	230V 50Hz 1Ø	12/13 (P8)			
ULT-2050-3-A	20.5 (580)	115V 60Hz 1Ø	16/20 (P2)	26.5 x 19.0 x 70.5 (670 x 480 x 1790)	41.0 x 31.8 x 95.5 (1040 x 808 x 2430)	685 (311)
ULT-2050-3-D	20.5 (580)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-2050-3-V	20.5 (580)	230V 50Hz 1Ø	12/16 (P7)			
ULT-2050-3-W	20.5 (580)	230V 50Hz 1Ø	12/13 (P8)			

*All dimensions and specifications subject to change without notice. External dimensions include allowances for cabinet door, hinges, latches, handles and control panel protrusions.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisan^{tg}.com](https://www.artisantg.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisan^{tg}.com | [artisan^{tg}.com](https://www.artisantg.com)

