

HP E1355A

## 8-Channel 120 Ohm Strain Relay Multiplexer



**In Stock**

**Used and in Excellent Condition**

**Open Web Page**

<https://www.artisanng.com/61853-1>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center


Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

---

# 8-Channel 120 $\Omega$ Strain Relay Multiplexer HP E1355A Technical Specifications

---

- 8-Channel 120  $\Omega$  strain gage relay multiplexer
- Strain gage measurements with bridge completion
- + 5 V excitation circuitry—quarter, half, and full bridge
- Strain, voltage, current, and  $\Omega$  measurements
- Automatic conversions for bridge configurations

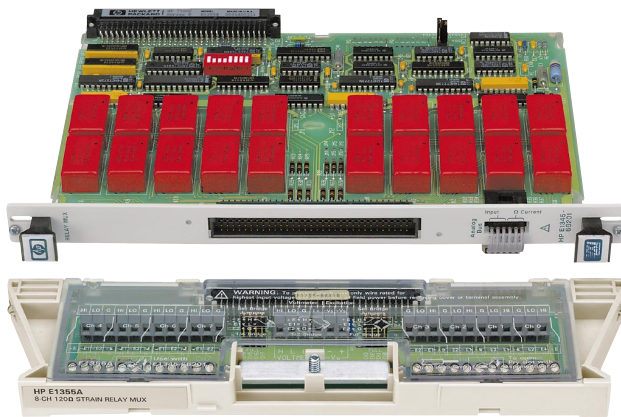

HP E1355A

## Description

The HP E1355A 120  $\Omega$  Strain Relay Multiplexer is a **B-size, 1-slot, register-based VXI module**. This relay multiplexer provides bridge completion and excitation voltage circuitry for up to eight channels. The multiplexer module consists of a B-size component card (labeled E1345-66201) and a screw terminal block that plugs onto the component card. The HP E1355A is functionally similar to the HP E1345A, E1347A, and E1356A.

You can perform strain gage measurements with automatic conversions to engineering units on multiple multiplexer channels by sending SCPI commands to the DMMs, HP E1326B or E1411B. Strain measurements supported in SCPI with these HP DMMs are quarter, bending half/full, poisson half/full, and bending poisson full.

Diagnostics for the HP E1355A include Tension Shunt, Compression Shunt, Leadwire Resistance, Internal Half Bridge Voltage, Guard Voltage and Bridge Excitation Voltage.

Refer to the HP Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

## Strain Measurements

Example SCPI commands with engineering units conversions follow:

Specify the gage factors:

—STRain:GFACTOR 2.11E-6, (@ 100:107)

Measure the unstrained reference:

—CALibration:STRain (@ 100:107)

Measure a Half Poisson bridge:

—MEASure:STRain:HPOisson (@ 100:103)

Strain measurements supported in SCPI with the above HP DMMs include:

- Quarter
- Bending Half
- Poisson Half
- Bending Full
- Poisson Full
- Bending Poisson Full

Diagnostics include:

- Tension Shunt Diagnostic
- Compression Shunt Diagnostic
- Leadwire Resistance
- Internal Half Bridge Voltage
- Guard Voltage
- Bridge Excitation Voltage

## Configuration

One analog bus cable is shipped with each module, making it easy to connect multiplexer common outputs together for slot-adjacent modules. If you are using a B-size mainframe, HP E1300A/B or HP E1301A/B, use the analog bus cable shipped with the HP E1326B DMM to connect it to the multiplexer(s).

## C-size Adapter

For installing the HP E1355A in a C-size mainframe, the HP E1403C active adapter is recommended.

## Product Specifications

### Strain Gage

#### Full bridge resolution:

5 V: 0.01  $\mu\epsilon$

1 V: 0.05  $\mu\epsilon$

0.1 V: 0.5  $\mu\epsilon$

#### Half bridge resolution:

5 V: 0.02  $\mu\epsilon$

1 V: 0.1  $\mu\epsilon$

0.1 V: 1  $\mu\epsilon$

#### Quarter bridge resolution:

5 V: 0.04  $\mu\epsilon$

1 V: 0.2  $\mu\epsilon$

0.1 V: 2  $\mu\epsilon$

#### Bridge excitation requirements:

Use the internal 5 V excitation power supply or external supply such as the HP 6214C.

#### Max ripple and noise requirement for excitation voltage:

1 mV peak-to-peak (20 Hz to 20 MHz)

#### Reference junction measurement accuracy:

0.3 °C (Over 18 °C to 28 °C operating)

### Input

#### DC:

Maximum voltage (any terminal to any other terminal or chassis): 120 Vdc

#### AC rms:

Maximum voltage (any terminal to any other terminal or chassis): 120 V rms

Maximum current (per channel common, non-inductive): 50 mA

Maximum power per channel: 1 VA

### DC

#### Maximum thermal offset per channel, differential Hi-Lo:

4  $\mu\text{V}$

#### Closed channel resistance:

100  $\Omega \pm 10\%$

#### Insulation resistance (between any two points):

10E9  $\Omega$

#### Insulation resistance (Hi to Lo, power off):

n/a

### AC

#### Minimum bandwidth

(–3 dB, 50  $\Omega$  source/load): 10 MHz (protection resistors shorted)

#### Crosstalk (channel-to-channel):

100 kHz: –80 dB (Protection resistors shorted, low and guard tied to chassis)

10 MHz: –40 dB (Protection resistors shorted, low and guard tied to chassis)

Both: n/a

#### Closed channel capacitance:

<150 pF Hi-Lo, <150 pF Lo-Guard, <2000 pF Guard-Chassis



---

## Related Literature

*1998 Test System and VXI Products Data Book*,  
HP Pub. No. 5966-2812E

*1998 Test System and VXI Products Catalog*,  
HP Pub. No. 5966-2815

---

## Warranty

Standard Hewlett-Packard VXIbus hardware products are warranted against defects in materials and workmanship for a period of three years unless otherwise noted. HP software and firmware products that are designated by HP for use with a hardware product, when properly installed on that hardware product, are warranted not to fail to execute their programming instructions due to defects in materials and workmanship.

For a complete and detailed warranty statement please see the *HP Test System and VXI Products Data Book* or visit the HP Website at <http://www.hp.com/go/vxi>.

---

## HP Website Directory

Main HP Website  
<http://www.hp.com>

HP Test and Measurement  
<http://www.hp.com/go/tmdir>

HP VXI Product Information  
<http://www.hp.com/go/vxi>

HP VXI Channel Partners  
<http://www.hp.com/go/vxichanpart>

HP VEE Application Website  
<http://www.hp.com/go/hpvee>

Data Acquisition and Control Website  
[http://www.hp.com/go/data\\_acq](http://www.hp.com/go/data_acq)

HP Instrument Driver Downloads  
[http://www.hp.com/go/inst\\_drivers](http://www.hp.com/go/inst_drivers)

**For more information about Hewlett-Packard test & measurement products, applications, services, and for a current sales office listing, visit our website, <http://www.hp.com/go/tmdir>. You can also contact one of the following centers and ask for a test and measurement sales representative.**

### United States:

Hewlett-Packard Company  
Test and Measurement Call Center  
P.O. Box 4026  
Englewood, CO 80155-4026  
1 800 452 4844

### Canada:

Hewlett-Packard Canada Ltd.  
5150 Spectrum Way  
Mississauga, Ontario L4W 5G1  
(905) 206 4725

### Europe:

Hewlett-Packard  
European Marketing Centre  
P.O. Box 999  
1180 AZ Amstelveen  
The Netherlands  
(31 20) 547 9900

### Japan:

Hewlett-Packard Japan Ltd.  
Measurement Assistance Center  
9-1, Takakura-Cho, Hachioji-Shi,  
Tokyo 192, Japan  
Tel: (81) 426 56 7832  
Fax: (81) 426 56 7840

### Latin America:

Hewlett-Packard  
Latin American Region Headquarters  
5200 Blue Lagoon Drive, 9th Floor  
Miami, Florida 33126  
U.S.A.  
Tel: (305) 267-4245  
(305) 267-4220  
Fax: (305) 267-4288

### Australia/New Zealand:

Hewlett-Packard Australia Ltd.  
31-41 Joseph Street  
Blackburn, Victoria 3130  
Australia  
1 800 629 485

### Asia Pacific:

Hewlett-Packard Asia Pacific Ltd.  
17-21/F Shell Tower, Times Square,  
1 Matheson Street, Causeway Bay,  
Hong Kong  
Tel: (852) 2599 7777  
Fax: (852) 2506 9285

Data Subject to Change  
Copyright © May 1998  
Hewlett-Packard Company  
HP Publication No.: 5965-5604E

# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](https://www.artisanng.com)

