

HP E1752A  
**VXI Pulse Distribution Amplifier**



**In Stock**

**Used and in Excellent Condition**

**Open Web Page**

<https://www.artisanng.com/49593-2>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

This literature was published years prior to the establishment of Agilent Technologies as a company independent from Hewlett-Packard and describes products or services now available through Agilent. It may also refer to products/services no longer supported by Agilent. We regret any inconvenience caused by obsolete information. For the latest information on Agilent's test and measurement products go to:

[www.agilent.com/find/products](http://www.agilent.com/find/products)

Or in the U.S., call Agilent Technologies at 1-800-452-4844 (8am-8pm EST)



**Agilent Technologies**  
Innovating the HP Way

# Cost Effective Signal Distribution for System Applications



## Product Overview

### HP E1750A Broadband Distribution Amplifier HP E1752A Pulse Distribution Amplifier



The HP E1750A and E1752A bring high performance signal distribution to the VXI format.

Designed to meet the demanding needs of today's system applications in:

- site frequency distribution for manufacturing
- automatic test equipment
- distribution of communications synchronization frequencies/pulses
- dissemination of precision frequencies and pulses for calibration and timekeeping applications

### Economical Signal Distribution

The HP E1750A and E1752A VXI distribution amplifiers buffer and distribute standard clock and other signals in laboratory, factory, and general ATE environments where key requirements are:

- broadband sine wave or pulse buffering/distribution
- distribution of precise clock frequencies
- distribution of precise 1 pps timing pulses
- high isolation/low cross talk between output channels
- no level adjustments
- preservation of input phase and frequency characteristics with changing environment
- channel fault alarm

Using VXI mainframe technology, these amplifiers provide an economical way of distributing signals around a single system, or an entire manufacturing plant or site.

### Fault Alarm Design Made Easy

Registers within the amplifiers allow you, via the VXIbus controller, to query the individual distribution input and output channels for presence/absence of a signal. Easy-to-read front panel status lights provide you with a quick visual indication of individual channel health. This greatly facilitates fault alarm design, a feature not found on most distribution amplifiers.

### Performance for Demanding Applications

While cost-per-channel has been lowered, no compromises have been made in delivering high quality signal distribution. These amplifiers provide high channel-to-channel isolation and low noise for demanding applications. In the HP E1750A, an internal AGC design enhances performance by automatically leveling input signals and ensuring extremely low AM-to-PM conversion.

## General Specifications

### Input Ranges

	HP E1750A	HP E1752A
<b>Frequency, min</b>	100 KHz	1 pps <sup>1</sup>
<b>Frequency, max</b>	10 MHz	10 Million pulses per second <sup>2</sup>
<b>Level, min</b>	+7 dBm	Logic LO: $\leq 0.8$ V
<b>Level, max</b>	+19 dBm	Logic HI: $2.0$ V $\leq V_{in}$
<b>Damage</b>	+27 dBm	+14 V, -9 V
<b>Impedance</b>	50 $\Omega$	50 $\Omega$

### HP E1750A Outputs, 50 $\Omega$ load

<b>Level:</b>	+13 dBm $\pm 1$ dB
<b>Phase noise:</b>	<-145 dBc <sup>3,4</sup>
<b>Harmonic distortion:</b>	<-45 dBc <sup>5</sup>
<b>Spurious modulation:</b>	<-80 dBc <sup>6</sup>
<b>Port-to-Port Isolation (open/short loads)</b>	
Phase modulation	<-100 dBc
Phase change, peak	< $\pm 0012^\circ$

### HP E1752A Outputs, 50 $\Omega$ load

<b>Rise/Fall Time:</b>	<5 ns
<b>Pulse Amplitude:</b>	>3.5 V
<b>Propagation Delay:</b>	22 ns, typical
<b>Jitter:</b>	<1 ns rms

Notes:

<sup>1</sup> may be used with lower pulse repetition rates, with restrictions on duty cycle and fault alarm operation (see User's Guide)


<sup>2</sup> 50ns minimum pulse width

<sup>3</sup> measured 1 KHz from carrier, 1 Hz BW

<sup>4</sup> <-142 dBc for 5 MHz <freq<sub>in</sub>  $\leq$  10 MHz

<sup>5</sup> <-40 dBc for 5 MHz <freq<sub>in</sub>  $\leq$  10 MHz

<sup>6</sup> discrete sidebands, 10 Hz to 50 KHz

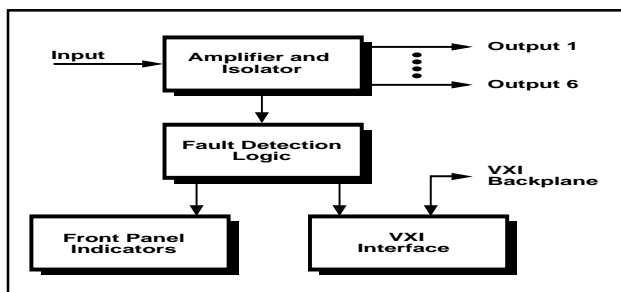

HP E1750A/E1752A Function Block Diagram

### Ordering Information

HP E1750A Broadband Distribution Amplifier  
Opt AV9 Delete User's Guide

HP E1752A Pulse Distribution Amplifier  
Opt AV9 Delete User's Guide

**United States:** Hewlett-Packard Company, Test and Measurement Call Center, P.O. Box 4026, Englewood, CO 80155-4026, 1 800 452 4844. **Canada:** Hewlett-Packard Canada Ltd., 5150 Spectrum Way, Mississauga, Ontario, L4W 5G1, (905) 206-4725. **Europe:** Hewlett-Packard, European Marketing Centre, P.O. Box 999, 1180 AZ Amstelveen, The Netherlands, (21 20) 547 9900. **Japan:** Hewlett-Packard Japan Ltd., Measurement Assistance Center, 9-1, Takakura-Cho, Hachioji-Shi, Tokyo 192, Japan, Tel: (81-426) 56-7832, Fax: (81-426) 56-7840. **Latin America:** Hewlett-Packard, Latin American Region Headquarters, 5200 Blue Lagoon Drive, 9th Floor, Miami, Florida 33126, U.S.A., (305) 267 4245/4220. **Australia/New Zealand:** Hewlett-Packard Australia Ltd., 31-41 Joseph Street, Blackburn, Victoria 3130, Australia, 1 800 629 485. **Asia Pacific:** Hewlett-Packard Asia Pacific Ltd., 17-21/F Shell Tower, Time Square, 1 Matheson Street, Causeway Bay, Hong Kong, Tel: (852) 2599 7777, Fax: (852) 2506 9285.



Printed in U.S.A. January 1997  
Data Subject to Change  
Hewlett-Packard Company  
Copyright © 1997  
5965-6904E

# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](https://www.artisanng.com)

