

HP 83732-67001

Microcircuit Modulator Module



Limited Availability
Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/98063-9>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.


Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

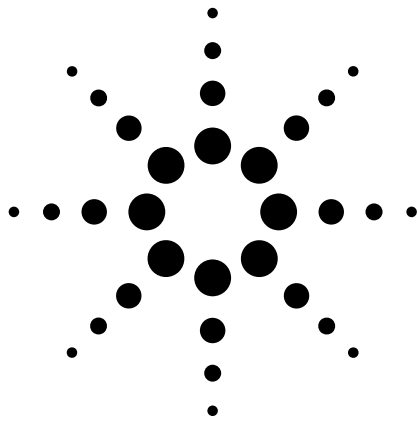

Agilent 70340A Modular Signal Generator 1 to 20 GHz

The high performance
signal generator for
modular test systems





All the Performance of Rack-and-Stack Signal Sources in Half the Space

Unlock the Power of Modular ATE

The HP 70340A is the first signal generator that delivers the performance, flexibility and value only modular ATE can provide. Designed to meet the need for a downsized, high performance signal source, the HP 70340A blends state-of-the-art

technologies in a new microwave signal generator design to achieve unprecedented performance and value. The HP 70340A's combination of high output power, excellent spectral purity, powerful modulation, small size and light weight is unmatched by any other signal generator.

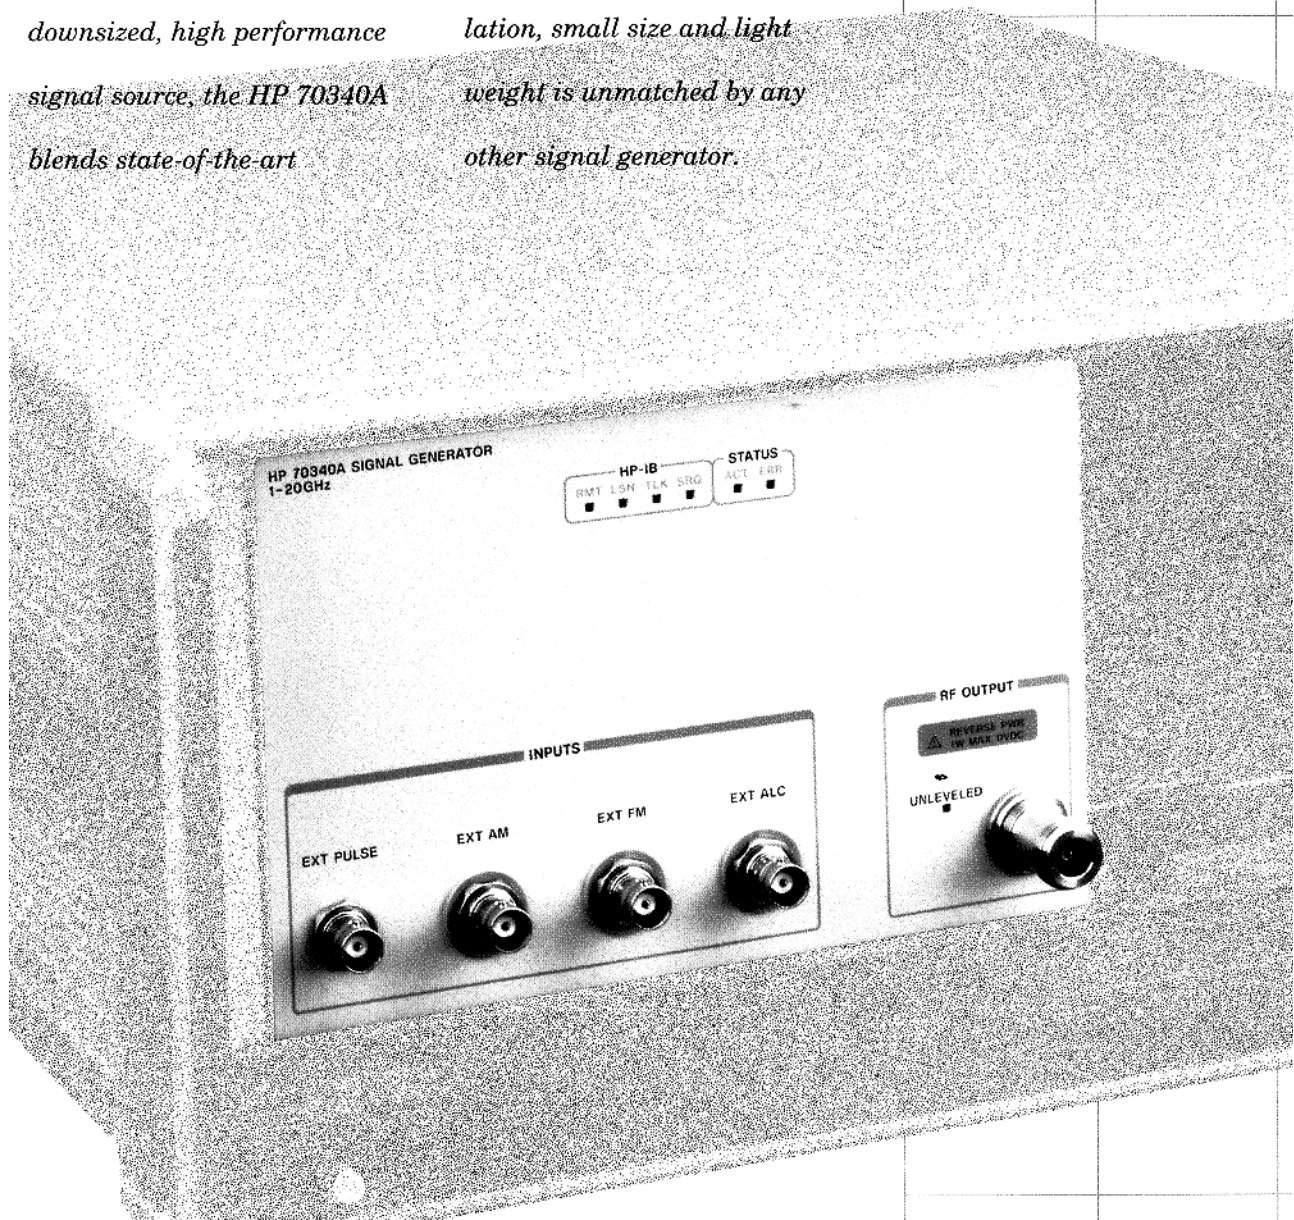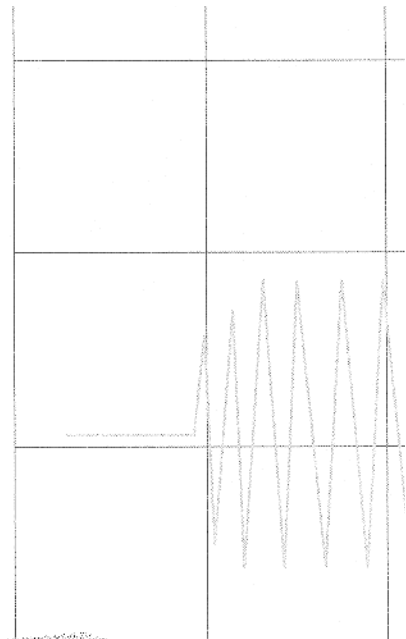

Flexible frequency coverage matches performance to your application

- Complete, broadband 1 to 20 GHz coverage in a single module.
- 1 kHz frequency resolution standard; 1 Hz optional.
- Frequency extension module will expand coverage down to 10 MHz.

Unsurpassed output level accuracy and flatness generates measurement precision

- ± 1 dB internal level accuracy
- ± 0.5 dB internal flatness
- 0.01 dB output level resolution
- User Level Correction allows transfer of power meter accuracy to signal generator output at any remote point.

Excellent spectral purity provides “single-signal” accuracy and maximum dynamic range

- Exceptionally low harmonics in all modes of operation (typically < -60 dBc).
- Fundamental microwave oscillators eliminate sub-harmonic signals.
- Low SSB phase noise (typically < -95 dBc/Hz at 10 kHz offset at $f_c = 6$ GHz).
- Quiet AM noise floor (typically < -150 dBm/Hz).

Full modulation capability simulates real-world signals

- Fast, accurate pulse modulation:
 - < 10 nanosecond rise/fall times
 - > 80 dB on/off ratio
- Multi-mode internal pulse modulation source (optional)
- Wideband, high index FM:
 - > 10 MHz peak deviation
 - > 1 MHz maximum rate
 - Modulation index > 300
- Log AM for antenna scan simulation and power sweeps:
 - > 60 dBc depth
 - Fast step response (typically < 5 microseconds)
- Excellent AM accuracy and linearity
- Simultaneous AM, FM and pulse modulation.

Industry standard, open architecture reduces risk

- Modular platform simplifies system upgrades.
- Designed in the Modular Measurement System (MMS) for maximum performance.


Versatile programming speeds system integration

- Standard commands for programmable instrumentation (SCPI) programming protects software investment.
- Optional CIIL capability meets MATE requirements.


Performance and Flexibility to Satisfy Your Application.

Signal simulation and receiver test

Simulate "real world" signals with the powerful modulation capability of the HP 70340A. Combine the high performance AM, FM and pulse modulations to generate the complex signals required for evaluating sophisticated receivers and sub-systems. Broad frequency coverage, excellent spectral purity and plenty of output power provide the flexibility necessary to evaluate modern receiver performance. Half rack width size makes the HP 70340A an excellent choice in multiple source applications including intermodulation testing and multi-emitter EW simulation.

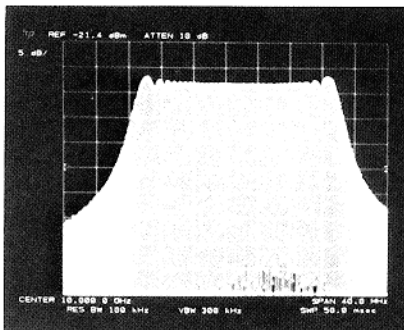


The HP 70340A's high index FM simplifies simulation of frequency chirped and telemetry signals.

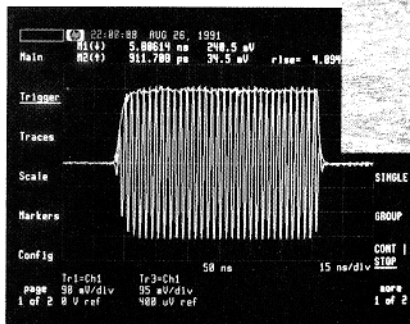

Compact component test system

The HP 70340A is a natural companion signal source for the HP 71500A Microwave Transition Analyzer. Together these two modular instruments offer powerful pulsed component test capability in a small, easy to configure system ideal for production test stations as well as R&D. Test components to their limits with the fast, clean pulse modulation of the HP 70340A. Excellent pulse flatness, low overshoot and minimum video feedthrough improve accuracy in pulsed component measurements. Optional 1 Hz frequency resolution provides full system capability.

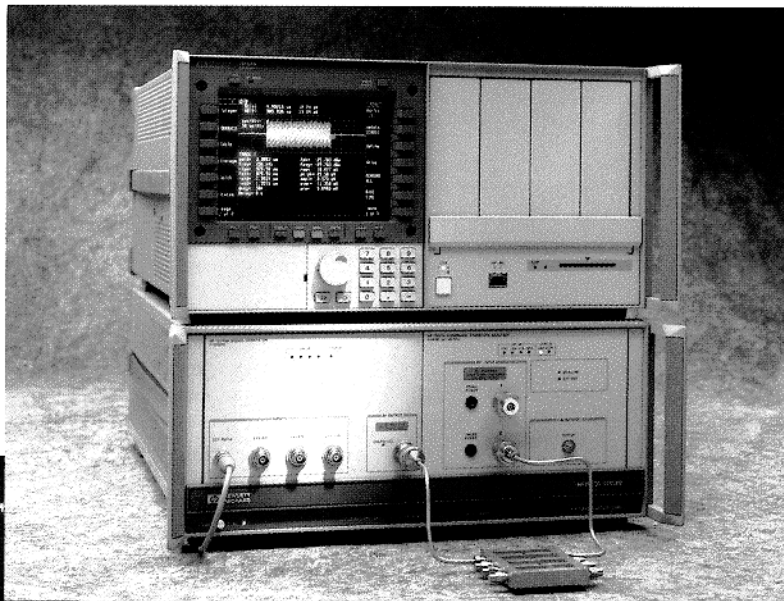

Excellent pulse fidelity makes the HP 70340A an ideal pulsed component and EW receiver stimulus.

**Signal Simulation
& Receiver Test**

Component Test

Communications

**Field &
Depot ATE**

Benchtop

Clean clock source for high speed bit error rate testing


Low noise signals with minimum jitter are critical for accurate BER and C/N testing. Low phase noise and spurious, 1 Hz frequency resolution and high output power make the HP 70340A an excellent clock source for the HP 71600 series of high speed digital testers. Combine the HP 70340A with these and other modular test instruments to provide a complete, high performance satellite, lightwave or LAN-based communications test station.

Match performance to mission in tomorrow's field portable ATE


Small size, low weight and proven MMS ruggedness make the HP 70340A the signal source of choice in tomorrow's portable ATE. Whether you're testing on the flightline, at isolated repeater sites or on the go with van mounted ATE, the HP 70340A delivers the performance you need to meet your mission requirements.

The power of modularity is ideal for benchtop applications too!

The HP 70340A and other Hewlett-Packard modular instruments are also excellent performers in benchtop applications. Improve synchronization, eliminate clutter and increase test flexibility without losing capability. The high performance and low spurious emissions of the HP 70340A make it a perfect signal source for benchtop applications in state-of-the-art R&D, manufacturing, quality assurance and metrology.

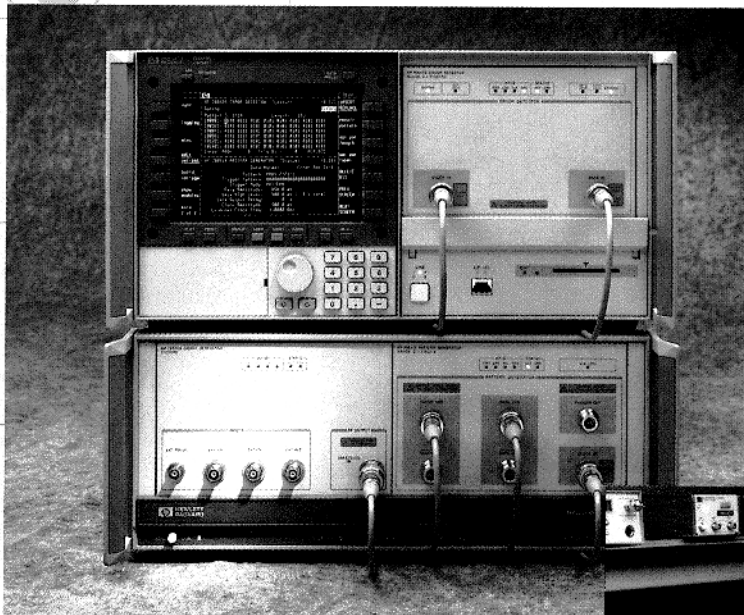

The performance and flexibility of the HP 70340A make it an ideal BERT clock source (above) as well as an excellent general purpose signal source in benchtop applications (right).

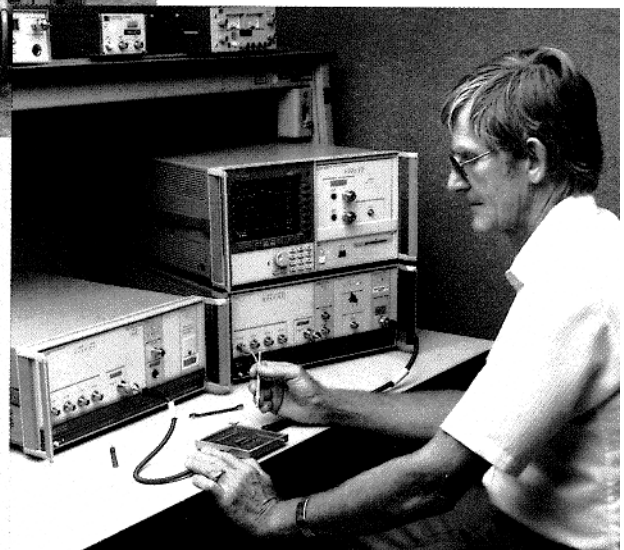

Specifications

SPECIFICATIONS describe the instrument's warranted performance over the 0° to 55°C temperature range unless otherwise noted. SUPPLEMENTAL CHARACTERISTICS (indicated by italics) are intended to provide information useful in estimating instrument capability in your application by describing typical, but not warranted, performance.

Frequency

Range: 1.0 to 20.0 GHz

Resolution: 1 kHz (1 Hz with Option 1E8)

Stability: Aging: With external high stability reference: Same as external reference.

Without external high stability reference: 1×10^{-8} per day after 72 hour operation warmup.

Temperature: With external high stability reference: Same as external reference


Without external high stability timebase: <5 ppm (0° to 55°C, referenced to 25°C).

Frequency Switching Time: <50 ms to within 1 kHz

RF Output

Maximum Levelled Output Power:

Frequency	Standard	with Option 1E1
1—18 GHz	+11 dBm	+10 dBm
18—20 GHz	+10 dBm	+8 dBm

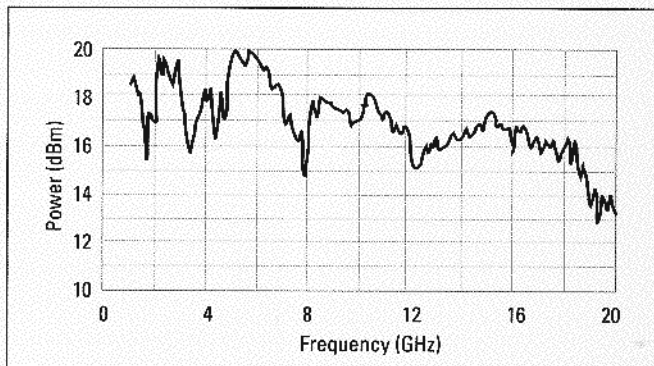


Typical maximum available output power at 25°C with output step attenuator (Option 1E1) installed.

Minimum Levelled Output Power: -4 dBm, -90 dBm with Option 1E1

Display Resolution: 0.01 dB

Accuracy: ±1.0 dB (-4 dBm to specified maximum levelled output power)¹

±2.0 dB (over all specified temperatures, frequencies and power levels)¹

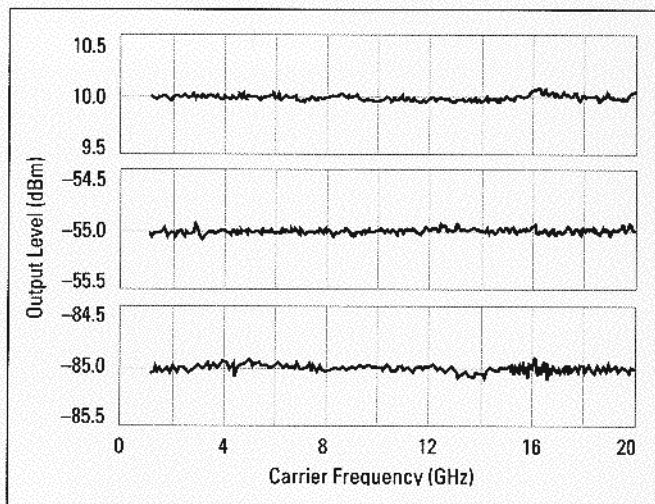

Typical output level accuracy and flatness at +10, -55 and -85 dBm.

Flatness: ±0.5 dB¹

Level Switching Time: <15 ms (without step attenuator range change. Attenuator range changes occur at -4, -14, -24 etc. dBm.)


Output SWR: <2.0 : 1 nominal

¹The use of Type-N RF connectors above 18.0 GHz degrades specification by 0.2 dB.

Spectral Purity


SSB Phase Noise (dBc/Hz):

Carrier Freq.	Offsets			
	100 Hz	1 kHz	10 kHz	100 kHz
2 GHz	-66	-74	-91	-110
10 GHz	-69	-75	-79	-101
18 GHz	-63	-70	-73	-103

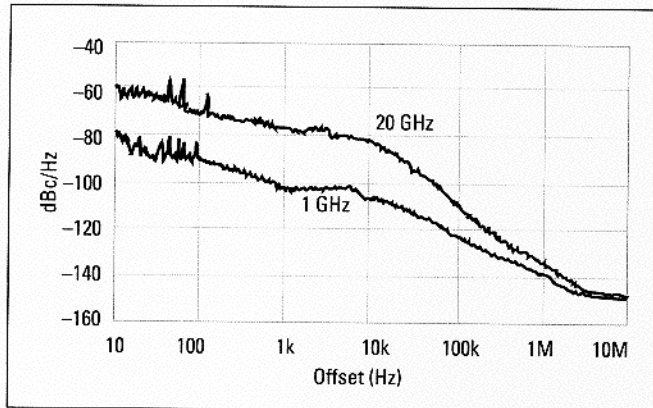

Typical single-sideband phase noise at 1 GHz and 20 GHz, 25°C, CW mode. Offsets less than 100 Hz require use of an external high-stability reference.

Harmonics: <-55 dBc at output levels <+6 dBm

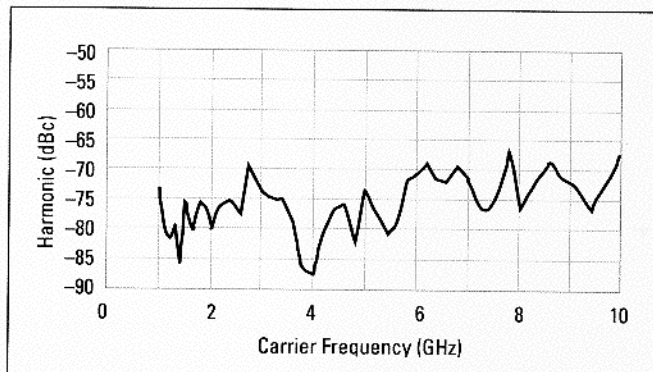


Typical 2nd harmonic levels measured at output power of +8 dBm with Option 1E1.

Non-Harmonic Spurious (≥ 3 kHz): <-60 dBc (includes power supply and frequency synthesis spurious).

Non-Harmonic Spurious (<3 kHz): <-50 dB

Sub-Harmonics: None

Residual FM:

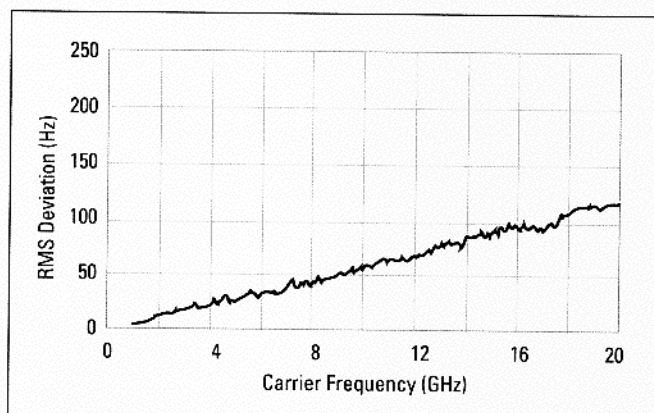


Typical residual FM measured in 50 Hz - 15 kHz bandwidth; CW mode.

AM Noise Floor: < 150 dBm/Hz at 0 dBm and offsets greater than 5 MHz from carrier.

Modulation

Pulse Modulation


On/Off Ratio: >80 dB

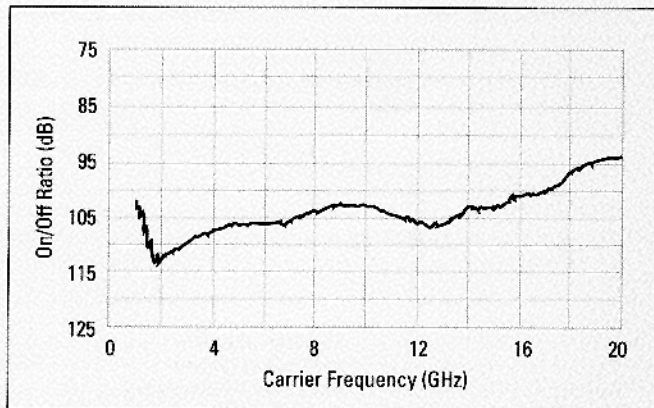

Typical pulse modulation on/off ratio at +8 dBm .

Minimum Pulse Width: <25 ns; typically <10 ns

Rise/Fall Time: <10 ns; typically <5 ns

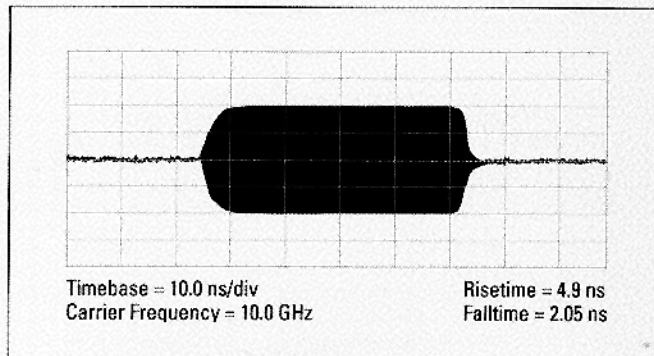

Typical pulse modulation envelope illustrates the fast rise and fall times, excellent flatness and pulse fidelity of the HP 70340A.

Maximum Pulse Repetition Frequency: >3 MHz

Minimum Pulse Duty Cycle: No restrictions on duty cycle.

Pulse Width Compression: <±5 ns

Pulse Overshoot: <10 %

Pulse Delay (Video to RF): <100 ns

Video Feedthrough: <20 mv peak to peak

Input Impedance: 50 Ω nominal; TTL drive levels

Pulse Level Accuracy: ± 1.0 dB (relative to CW)

Maximum Levelled Output Power in Pulse Mode: -0.5 dB relative to CW

Internal Pulse Modulation Source (Option 1E2)

Pulse Source Modes: Free-run, triggered with delay, doublet and gated. Triggered with delay, doublet and gated require external trigger source.

Pulse Repetition Frequency: 3 Hz to >3 MHz

Pulse Repetition Interval (PRI): 300 ns to 419 ms

Pulse Width (T_w): 25 ns to 419 ms


Variable Pulse Delay (free-run mode, T_d): ± 419 ms from sync pulse to video pulse

Variable Pulse Delay (triggered with delay & doublet modes, T_d): 225 ns to 419 ms with ± 25 ns jitter

Pulse Width/Delay/PRI Resolution: 25 ns

Pulse Delay (Video to RF, T_m): Nominally, < 20 ns

All pulse modulation specifications and supplemental characteristics apply during use of internal pulse source.

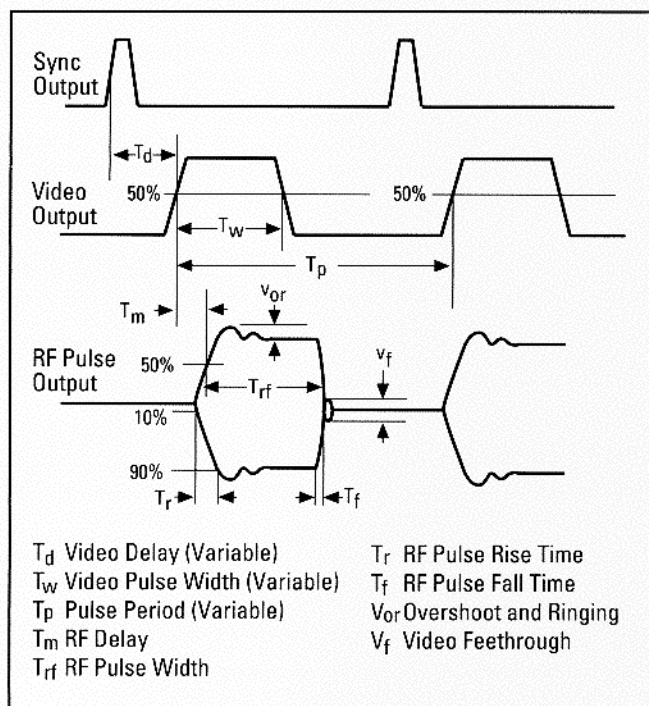

Frequency Modulation

Rates: 1 kHz to 1 MHz

Flatness: ± 2 dB

Maximum Deviation: 10 MHz peak, 2-20 GHz. 5 MHz peak, 1-2 GHz

FM Sensitivity: 5 MHz / Volt

FM Sensitivity Accuracy: $\pm 25\%$ at 100 kHz

Modulation Index: > 300 , 2-20 GHz. > 150 , 1-2 GHz

Incidental AM: $< 5\%$,

FM Input Impedance: 600 Ω nominal

Harmonic Distortion: $< 1\%$ (1 MHz peak deviation, 100 kHz rate)

Logarithmic Amplitude Modulation (Scan Modulation)


Maximum Depth: > 60 dB

Sensitivity: -10 dB / Volt; (0 to +6V for 0 to -60 dBc)

Step Response: (rise and fall): $< 5\mu s$ for 50 dB change in level

Input Impedance: 5000 Ω nominal

Maximum Levelled Output Power in Log AM Mode: -4.0 dB
relative to CW, 1-4 GHz; -1 dB relative to CW, > 4 GHz

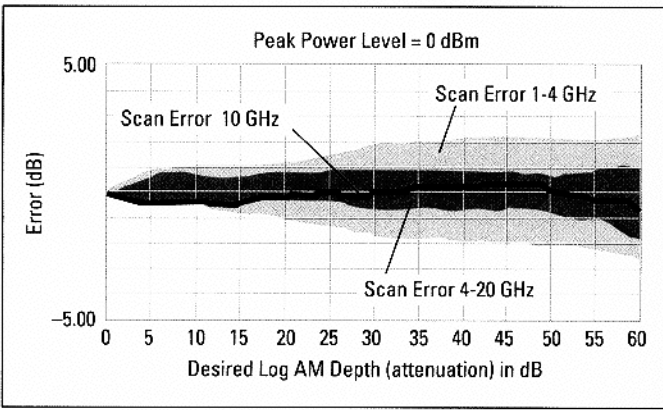

Typical log AM error (deviation from desired depth) at 25°C for carrier frequencies between 1.0 and 20 GHz.

Simultaneous Modulations

Full AM bandwidth and depth is available at any pulse rate or width. FM is completely independent of AM and pulse modulation.

General

Programming

The HP 70340A is fully compatible with the Standard Commands for Programmable Instruments (SCPI). SCPI programming complies with IEEE 488.2-1987. Optional CIIL programming compatibility is available. Please consult your HP sales representative for details.

Environmental

Operating Temperature Range: 0° to 55°C

EMC: Meets or exceeds EN 55011/CISPR 11/1990, Class A and Mil-Std-461C Part 4 RE02, CE03, CS02, RS03.


Physical Dimensions

Net Weight: < 9 kg (20 lb);

Shipping: < 15 kg (30 lb)

Size: 4/8 MMS module width. 148.5 mm H x 192.8 mm W x 477.5 mm D

Power Consumption: < 80 Watts

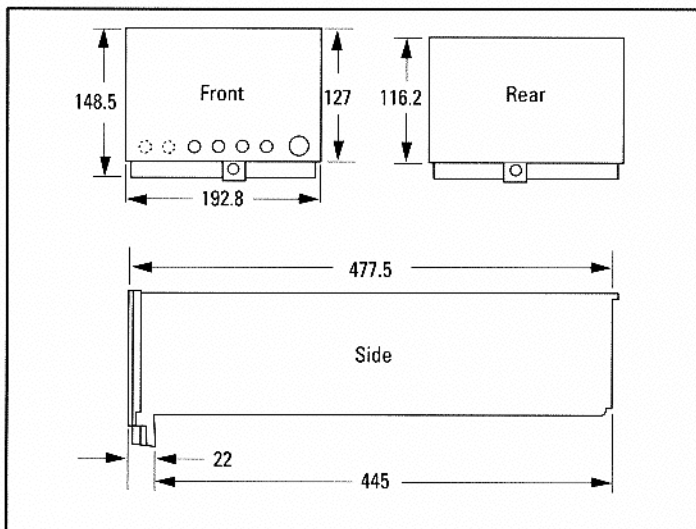

Rear Panel Connectors

0.5-1 GHz Output:

Outputs a 0.5 to 1.0 GHz signal for driving the HP 70341A Frequency Extension module.

0.01-1 GHz Input:

Accepts the HP 70341A 0.01-1 GHz output signal. The HP 70341A signal is output step attenuated in the HP 70340A with the 0.01 to 1.0 GHz output available at the front panel output connector of the HP 70340A.

10 MHz Input:

Accepts a 10 MHz \pm 100 Hz, 0 to +10 dBm, external reference signal for operation from an external high stability timebase. Nominal input impedance is 50 Ω .

10 MHz Output:

Outputs the 10 MHz external reference signal, nominally +3 dBm, for use as an external reference signal for other modules.

External ALC Output:

Outputs external ALC drive signal (from front panel EXT ALC input connector) to frequency extension modules.

ALC Control Output:

Supplies a -10 to +10 V signal as a reference for leveling the .01 to 1.0 GHz output signal of the HP 70341A.

0.5 V/ GHz Output:


Supplies a voltage proportional to output frequency for use with mm-wave frequency multipliers, including the HP 835XX Series.

AM Output:

Outputs AM modulation drive signal (from front panel EXT AM input connector) to frequency extension modules.

Pulse Output:

Outputs pulse modulation drive signals (from front panel EXT PULSE input connector) to frequency extension modules.

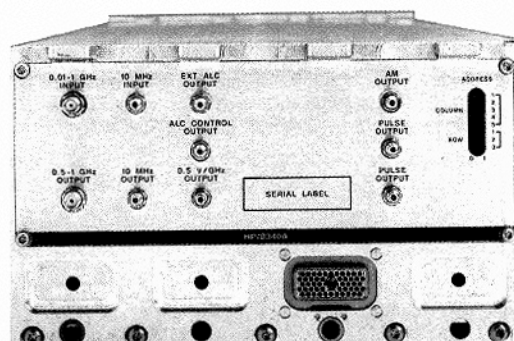

Rear Panel

Part Numbers

70340A Modular Signal Generator

Option 1E1 Add Output Step Attenuator

Option 1E2 Internal Pulse Modulation Generator

Option 1E8 1 Hz Frequency Resolution

Option 1E9 3.5 mm RF Output Connector

Option 0B2 Extra Operating Manual

Option 0B3 Service Manuals



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

Agilent T&M Software and Connectivity

Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections. Visit www.agilent.com/find/connectivity for more information.

By internet, phone, or fax, get assistance with all your test & measurement needs

Phone or Fax

United States:

(tel) 800 829 4444

Canada:

(tel) 877 894 4414

(fax) 905 282 6495

China:

(tel) 800 810 0189

(fax) 800 820 2816

Europe:

(tel) (31 20) 547 2323

(fax) (31 20) 547 2390

Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

Korea:

(tel) (82 2) 2004 5004

(fax) (82 2) 2004 5115

Latin America:

(tel) (305) 269 7500

(fax) (305) 269 7599

Taiwan:

(tel) 0800 047 866

(fax) 0800 286 331

Other Asia Pacific

Countries:

(tel) (65) 6375 8100

(fax) (65) 6836 0252

Email:

tm_asia@agilent.com

Online Assistance:

www.agilent.com/find/assist

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 1991

Printed in USA, January 1, 1991

5091-1593E



Agilent Technologies

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanTG.com | [artisanTG.com](https://www.artisanTG.com)

