

Chessell 2416

Temperature and Process Controller



Limited Availability
New From Surplus Stock

Open Web Page

<https://www.artisanng.com/89570-1>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

2416

MODEL



Programmer/Controller
Product data

Features

- **High stability control**
- **Up to four 16 segment programs**
- **Heating and cooling**
- **Motorised Valve control**
- **Customised operation**
- **Load diagnostics**
- **Heater current display**
- **Multiple alarms on a single output**
- **One-shot tuner with overshoot inhibition**
- **Adaptive tuning**
- **24V Supply option**
- **Auto/manual button**
- **Setpoint rate limit**
- **DC retransmission**
- **PDSIO setpoint input or retransmission**
- **Digital communications**
- **Plug-in from front**
- **IP65 panel sealing**
- **Compliant with European EMC and low voltage safety directives**
- **3 Year warranty**

The 2416 is a versatile, high stability, temperature or process controller, with self and adaptive tuning, in a 1/16 DIN size (48x48x150mm). It has a modular hardware construction which will accept up to three plug-in I/O modules and one communication module. The 2416 is fully configurable on-site.

The 2416 is also available in versions with a simple 8 segment setpoint profile or more powerful versions that will run one 16 segment program or store 4 programs of 16 segments.

Precise control

An advanced PID control algorithm gives stable 'Straight-line' control of the process. A one-shot tuner is provided to set up the initial PID values and to calculate the overshoot inhibition parameters. In addition an adaptive tuner will handle processes with continually changing characteristics. On electrically heated loads, power feedback is used to stabilise the output power and hence the controlled temperature against supply voltage fluctuations. Dedicated cooling algorithms ensure optimum control of fan, water and oil cooled systems.

Universal input

A universal input circuit with an advanced analogue to digital convertor samples the input at 9Hz and continuously corrects it for drift. This gives high stability and rapid response to process changes. High noise immunity is achieved by rejection of 50/60Hz pick-up and other sources of noise. Sensor diagnostics are also provided. The input will accept standard thermocouples, the Pt100 resistance thermometer and linear millivolts, milliamps or DC volts. Input filtering from OFF to 999.9 seconds is included.

Customised operation

A custom LED display provides a bright, clear display of the process value and setpoint. Tactile push buttons ensure positive operation. Access to other parameters is simple and easy to understand and can be customised to present only those parameters that need to be viewed or adjusted. All other parameters are locked away under password protection. A front panel auto/manual button is provided.


Alarms

Up to four process alarms can be combined onto a single output. They can be full scale high or low, deviation from setpoint, rate of change or load failure alarms. Alarm messages are flashed on the main display. Alarms can be configured as latching or non-latching and also as 'blocking' type alarms, this means that they will become active only after they have first entered a safe state.

Digital communications

Available with either EIA485 2 wire or 4 wire or EIA232. With industry-standard protocols including: Modbus®, Eurotherm Bisync, and SPI.

PDSIO Load diagnostic

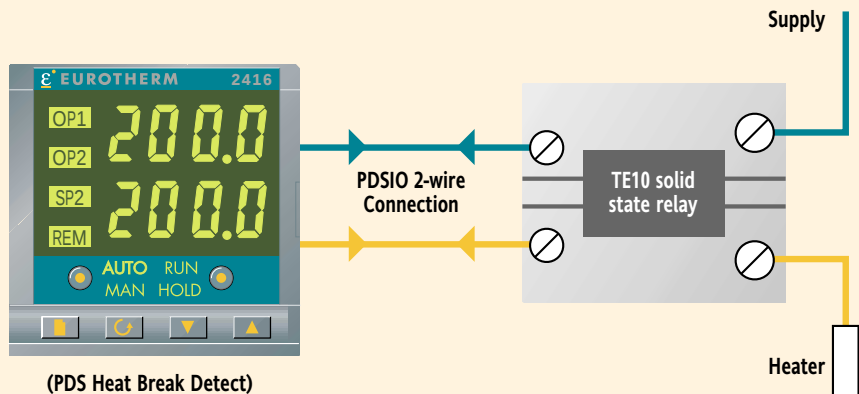


(PDS Heat Break Detect)

PDSIO Load diagnostics

PDSIO (Pulse Density Signalling I/O) is a major innovation in the 2416. When used in combination with a Eurotherm TE10 solid state relay (SSR), it allows the logic output of a 2416 to transmit the power demand signal and simultaneously read back load fault alarms. These alarms will be flashed as messages on the controller front panel.

Two alarm conditions will be detected, either SSR failure indicating an open or short circuit condition in the SSR and heater circuit failure indicating either fuse failure, heater open circuit or line supply absent.

PDSIO Setpoint transmission

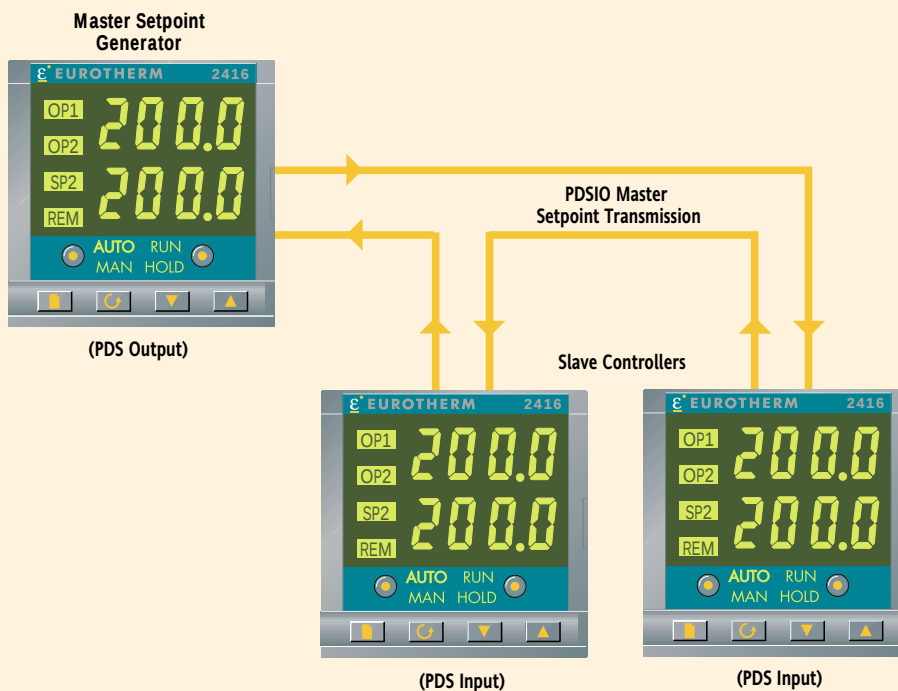

(PDS Output)

(PDS Input)

(PDS Input)

PDSIO master setpoint transmission

PDSIO can be used to digitally transmit the setpoint profile to a number of slave Series 2000 controllers.

If any slave zone departs from the required setpoint by more than a pre-settable amount, a signal from any slave can be transmitted back to the master causing the program to freeze until the error is corrected. Digital accuracy is preserved using PDSIO.

Technical specification

Inputs

General	Range	$\pm 100\text{mV}$ and 0 to 10Vdc (auto ranging)
	Sample rate	9Hz (110mS)
	Calibration accuracy	0.2% of reading, ± 1 LSD, $\pm 1^\circ\text{C}/^\circ\text{F}$
	Resolution	$< 1.6\mu\text{V}$ for $\pm 100\text{mV}$ range, $< 0.2\text{mV}$ for 10Vdc range
	Linearisation accuracy	No discernable error
	Zero drift with ambient temperature	$< 0.1\mu\text{V}$ per $^\circ\text{C}$ for $\pm 100\text{mV}$ range, 0.1mV per $^\circ\text{C}$ on 10Vdc range
	Gain drift with ambient temperature	$< 0.004\%$ of reading per $^\circ\text{C}$
	Input filter	OFF to 999.9 secs
	Zero and span offset	User adjustable over the full display range
Thermocouple	Types	See sensor inputs table
	Cold junction compensation	Automatic compensation typically > 30 to 1 rejection of ambient temperature change External references 0, 45 and 50°C
RTD/PT100	Type	3-wire, Pt100
	Bulb current	0.2mA
	Lead compensation	No error for up to 22 ohms balanced in all 3 leads
Process	Linear	$\pm 100\text{mV}$, 0 to 20mA or 0 to 10Vdc (All configurable between limits)
	Non-linear	Square root or custom 8 point

Outputs

Relay	Rating: 2-pin relay	Min: 12V, 100mA dc. Max: 2A, 264Vac resistive
	Application	Heating, cooling, process output, alarms or program event
Logic	Rating	18Vdc at 24mA (non-isolated)
	Application	Heating, cooling or program event
		PDSIO mode 1: Logic heating with load failure alarm PDSIO mode 2: Logic heating with load/SSR failure alarms and load current display
Triac	Rating	1A, 30 to 264Vac resistive
	Application	Heating, cooling or program event
Analogue	Range	Non-isolated 0 to 20mA (into 600Ω max) 0 to 10Vdc (both configurable between limits)
	Application	Heating, cooling, process output

Communications

Digital	Transmission standard	EIA 485 or EIA 232 at 1200, 2400, 4800, 9600, 19,200 baud
	Protocols	Modbus® or Eurotherm Bisync or SPI
PDSIO	Setpoint input	Setpoint input from master PDSIO controller. Holdback to master controller
	Setpoint output	Master setpoint retransmission to slave PDSIO controllers

Control functions

Control	Modes	PID or PI with overshoot inhibition, PD, PI, P only or On/Off
	Application	Heating, cooling or process output
	Auto/manual	Bumpless transfer or forced manual output
	Setpoint rate limit	0.01 to 99.99 degrees or display units per second, minute or hour
	Cooling algorithms	Linear; Water (non-linear); Fan (minimum on time). Oil and proportional only
Tuning	One-shot tune	Automatic calculation of PID and overshoot inhibition parameters
	Adaptive Tune	Continuous assessment of the PID values
	Automatic droop compensation	Automatic calculation of manual reset value when using PD control
Alarms	Types	Full scale high or low. Deviation high, low, or band. Rate of change
	Modes	Latching or non-latching. Normal or blocking action
		Up to four process alarms can be combined onto a single output
Setpoint programming	Program size	One or four programs of 16 segments each
	Event outputs	Up to two – relay, logic or triac

Programmer parameters

	Programs	Up to four programs
	Segments	16 segments per program
	Ramp	Ramp Rate or Time to Target Hours, Minutes or Seconds (0.1 to 999.9)
	Dwell	Hours, Minutes or Seconds (0.0 to 999.9)
	Holdback	Per Program or per Segment (0.0 to 999.9)
	End Segment	Dwell, Reset or Set output level
	Cycles	Continuous or 1 to 999
	Event outputs	Up to eight – relay, logic or triac

General

	Display	Dual, 4 digit x 7 segment high intensity LED
	Dimensions and weight	48W x 48H x 150D mm. 250g
	Supply	85 to 264Vac, 48 to 62Hz. or optionally 20 to 29V ac or dc
	Power consumption	10watts
	Temperature and RH	Operating: 0 to 55°C, RH: 5 to 95% non-condensing. Storage: -10 to 70°C
	Panel sealing	IP65
	Electromagnetic	Meets generic emissions standard EN50081-2 for industrial environments compatibility Meets general immunity requirements of EN50082-2(95) for industrial environments
	Safety standards	EN61010, installation category 2. (voltage transients must not exceed 2.5kV)
	Atmospheres	Electrically conductive pollution must be excluded from the cabinet in which this controller is mounted. This product is not suitable for use above 2000m or in corrosive or explosive atmospheres without further protection.

Ordering information

Hardware coding

Model Number	Function	Supply Voltage	Module 1	Module 2	Module 3	Comms 2	Manual
2416							

Function	Supply Voltage	Module 1	Module 2	Module 3	Comms
Standard PID control CC Controller only CG 1 x 8 seg Prog CP 1 x 16 seg Prog P4 4 x 16 seg Prog On/Off Control NF Controller only NG 1 x 8 seg Prog NP 1 x 16 seg Prog N4 4 x 16 seg Prog Motorised valve control VC Controller only VG 1 x 8 seg Prog VP 1 x 16 seg Prog V4 4 x 16 seg Prog	VH 85-264Vac VL 20-29Vac/dc	XX None Relay: 2-pin R2 Fitted unconfigured RH Heating output RU Valve raise output FH High alarm 1 FL Low alarm 1 DB Dev. band alarm 1 DL Dev. low alarm 1 DH Dev. high alarm 1 Logic L2 Fitted unconfigured LH Heating output M1 PDS Heater break detect (note 1) M2 PDS Current monitoring (note 2) Triac T2 Fitted unconfigured TH Heating output TU Valve raise output DC control (Non-isol) D2 Fitted unconfigured H1 0-20mA PID heating H2 4-20mA PID heating H3 0-5V PID heating H4 1-5V PID heating H5 0-10V PID heating	XX None Relay: 2-pin R2 Fitted unconfigured RC Cooling output RW Valve lower output FH High alarm 2 FL Low alarm 2 DB Dev. band alarm 2 DL Dev. low alarm 2 DH Dev. high alarm 2 PO Program event 1 (not with 8-seg prog) PE Program END output Logic L2 Fitted unconfigured LC Cooling output Triac T2 Fitted unconfigured TC Cooling output TW Valve lower output DC control (Non-isol) D2 Fitted unconfigured C1 0-20mA PID cooling C2 4-20mA PID cooling C3 0-5V PID cooling C4 1-5V PID cooling C5 0-10V PID cooling	XX None Relay: 2-pin R2 Fitted unconfigured FH High alarm 4 FL Low alarm 4 DB Dev. band alarm 4 DL Dev. low alarm 4 DH Dev. high alarm 4 RA Rate of change alarm PO Program event 2 (not with 8-seg prog.) PE Program END output PDS Alarms LF Heater break detect HF Current monitoring heater break SF Current monitoring SSR failure Logic L2 Fitted unconfigured Triac T2 Fitted unconfigured DC retrans (Non-isol) D2 Fitted unconfigured First character V- PV retrans S- Setpoint retrans O- Output retrans Z- Error retrans Second character -1 0-20mA -2 4-20mA -3 0-5V -4 1-5V -5 0-10V	XX None 2 wire, RS485 Y2 Fitted unconfigured YM Modbus protocol YE El-Bisynch protocol RS232 A2 Fitted unconfigured AM Modbus protocol AE El-Bisynch protocol 4 wire, RS422 F2 Fitted unconfigured FM Modbus protocol FE El-Bisynch protocol PDS Input M6 Fitted unconfigured RS Setpoint input PDS Output M7 Fitted unconfigured PT PV retrans TS Setpoint retrans OT Output retrans
					Manual
					XXX No manual ENG English FRA French GER German NED Dutch SPA Spanish SWE Swedish ITA Italian

Note 1. PDS heater break detect will transmit the power demand to a TE10S Solid State Relay and read back a heater break alarm.

Note 2. PDS current monitoring will transmit the power demand signal to a TE10S Solid State Relay and read back load current and open and short circuit alarms.

Configuration coding (optional)

Sensor Input	Setpoint Min	Setpoint Max	Display Units	Control	Power	Options Cooling	Buttons	Program
	note 3	note 3						

Sensor Input	Setpoint Min	Setpoint Max	Display Units	Options
Standard Sensor Inputs			C Celsius F Fahrenheit K Kelvin X Blank	Control action XX Reverse acting (standard) DP Direct acting Power feedback XX Enabled on logic, relay and triac heating outputs PD Feedback disabled Cooling options XX Linear cooling CF Fan cooling CW Water cooling CL Oil cooling CO On/Off cooling Front panel buttons XX Enabled MD Auto/manual disabled MR Auto/man & run/hold disabled RD Run/hold disabled Programmer timing XX Ramp and dwell in mins HD Dwell time in hours HR Ramp rate in units/hour
J J Thermocouple	Min	°C Max		
K K Thermocouple	-210	1200		
T T Thermocouple	-200	1372		
L L Thermocouple	-200	400		
N N Thermocouple-Nicrosil/Nisil	-200	900		
R R Thermocouple-Pt/Pt13%Rh	-250	1300		
S S Thermocouple-Pt /Pt10%Rh	-50	1768		
B B Thermocouple-Pt/Pt30%Rh -6%Rh	-50	1768		
P Platinel II Thermocouple	0	1820		
Z RTD/PT100 DIN 43760	0	1369		
Factory Downloaded Input	Min	°C Max		
C C Thermocouple - W5%Re/W26%Re (Hoskins)	-200	850		
D D Thermocouple - W3%Re/W25%Re	0	2319		
E E Thermocouple	0	2399		
1 Ni/Ni18%Mo Thermocouple	-250	1000		
2 Pt20%Rh/Pt40%Rh Thermocouple	0	1399		
3 W/W26%Re (Englehard) Thermocouple	0	1870		
4 W/W26%Re (Hoskins) Thermocouple	0	2000		
5 W5%Re/W26%Re (Engelhard) Thermocouple	0	2010		
6 W5%Re/W26%Re (Bucose) Thermocouple	10	2300		
7 Pt10%Rh/Pt40%Rh Thermocouple	0	2000		
8 Exergen K80 I.R. pyrometer	200	1800		
Process Inputs (Scaled to setpoint min and max)	Min	°C Max		
F -100 to +100mV linear	-45	650		
Y 0 to 20mA linear (note 4)	-1999	9999		
A 4 to 20mA linear (note 4)	-1999	9999		
W 0 to 5Vdc linear	-1999	9999		
G 1 to 5Vdc linear	-1999	9999		
V 0 to 10Vdc linear	-1999	9999		

Note 3. Setpoint limits: Include the decimal position required in the displayed value. Up to one for temperature inputs, up to two for process inputs.

Note 4. An external 1% current sense resistor is supplied as standard. If greater accuracy is required, a 0.1% 2.49Ω can be ordered as part no. SUB2K/249R.1.


Example ordering code:

2416 - CC - VH - LH - RC - FH - YM - ENG - K - 0 - 1000 - C - XX - XX - XX - MD - XX

2416, Controller, 85 to 264Vac, Logic heating, Relay cooling, High alarm relay, RS485, Modbus comms, English manual, type K thermocouple, 0 to1000°C, Manual button disabled.

Dimensional details


All dimensions in mm

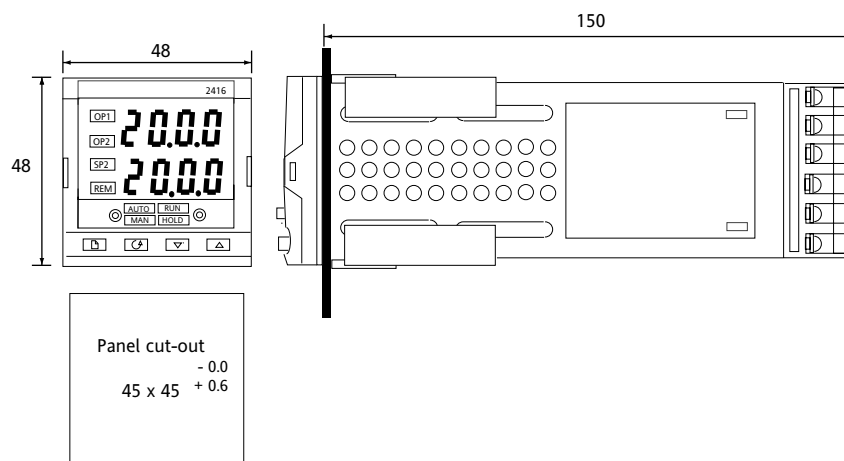

Rear terminal connections

Modules 1, 2 and 3 are plug-in modules.

They can be any one of the types shown in the ordering information on previous pages

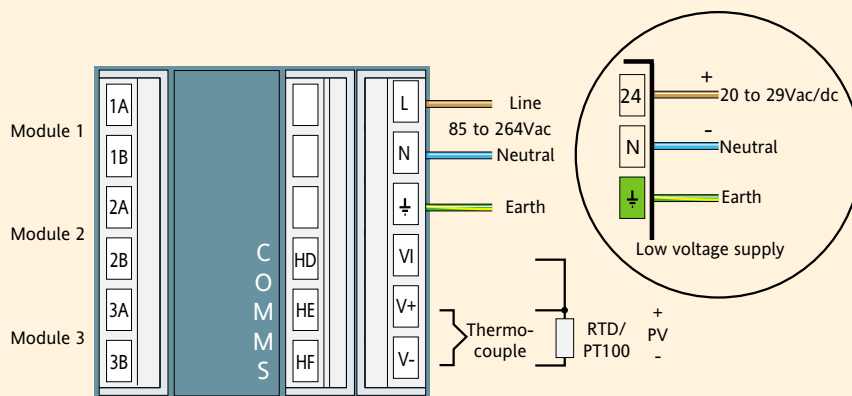

EUROTHERM LIMITED UK

Faraday Close Durrington Worthing BN13 3PL
Tel. +44 (0)1903 268500 Fax +44 (0)1903 695666
Email info@eurotherm.co.uk
www.eurotherm.co.uk

EUROTHERM US

741-F Miller Drive Leesburg VA 20175-8993
Tel. 1-703-443-0000 Fax 1-703-669-1300
Email info@eurotherm.com
www.eurotherm.com

EUROTHERM WORLDWIDE

www.eurotherm.co.uk

© Copyright Eurotherm Limited 2004

All rights are strictly reserved. No part of this document may be reproduced, modified, or transmitted in any form by any means, nor may it be stored in a retrieval system other than for the purpose to act as an aid in operating the equipment to which the document relates, without the prior written permission of Eurotherm Limited.

Eurotherm Limited pursues a policy of continuous development and product improvement. The specifications in this document may therefore be changed without notice. The information in this document is given in good faith, but is intended for guidance only. Eurotherm Limited will accept no responsibility for any losses arising from errors in this document.



Part No. HA025564 Issue 3.2

2416 Data sheet

Printed in England 08.04

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at artisanng.com for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanng.com | artisanng.com

