16-Channel 24-230VAC (IEC) / 24-115VAC (VDE) Discrete Output Triac Module



\$115.00

In Stock
Qty Available: 10+
Used and in Excellent Condition

Open Web Page

https://www.artisantg.com/66038-9

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.

- Critical and expedited services
- In stock / Ready-to-ship

- · We buy your excess, underutilized, and idle equipment
- · Full-service, independent repair center



Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group


(217) 352-9330 | sales@artisantg.com | artisantg.com

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

DAP 216 Discrete Output Module

The DAP 216 is a discrete output module with 16 independent 24 VDC output circuits. It can drive relays, motor starters, pilot lamps, valves, solenoids and other similar loads. The module is structured in two groups of eight outputs, each output electrically opto-isolated from the I/O bus, and each group is protected against short circuit and overload.

Figure 5-35 Wiring Diagram and Simplified Schematic for the DAP 216 Output Module

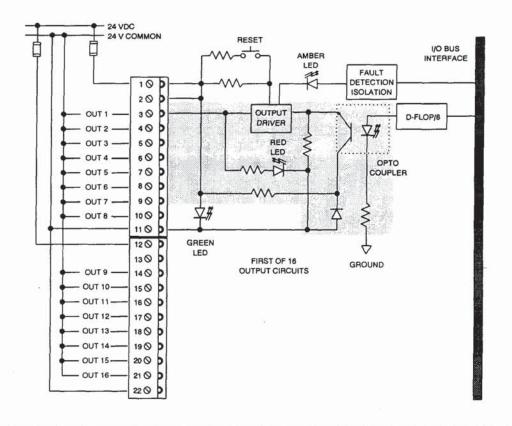


LED's

The DAP 216 has 20 LEDs. Two green LEDs opposite terminal screws 1 and 12 indicate when ON that working voltage is available to the two groups of eight discrete outputs. Two amber LEDs opposite terminal screws 2 and 13 are ON to indicate a short circuit or overload problem in each of the two output groups. There are 16 red LEDs opposite terminal screws 3 ... 10 and 14 ... 21, indicating when On that the adjacent discrete output is in an ON condition.

Resetting the Module After an Overload or Short Circuit

The two amber LEDs display short circuit or overload conditions in the two discrete output groups. After taking corrective measures to remove the cause of the overload or short circuit, push the yellow reset button on the front of the module to reactivate it.

Figure 5-36 Front View of the DAP 216 Module with Reset Button Location

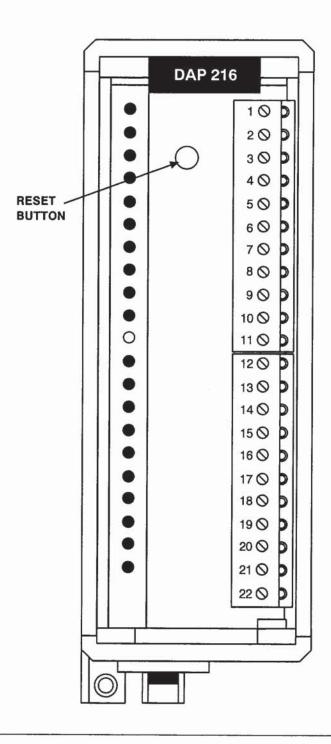


Protecting the Module from Inductive Back EMF

If you have inductive loads on longer lines with logic elements located in the output loads, install an external clamping diode in parallel with the operating coil to protect the module from reverse EMF.

DAP 216 Characteristics

Figure 5-37 Clamping Diode on an Inductive Load

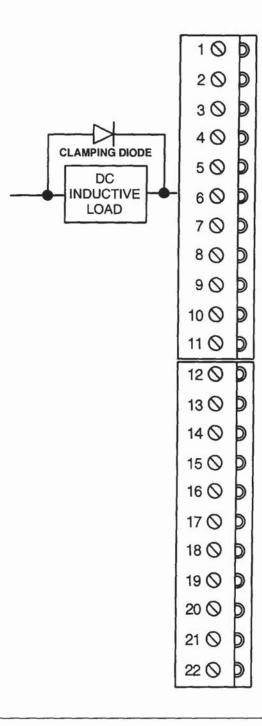

Module Topology

Number of Outputs 16 2

Number of Groups

Points/Group Isolation

Each point opto-isolated from the I/O bus

Each output group isolated from the other

Power Supplies

External Source Requirement

8

Internally Provided Source Internal Power Dissipation 24 VDC

5V from I/O Bus 1 Watts (Typical)

21 ... 24 VDC

0 ... +2 V, < 1 mA 10 mA ... 0.5 A

Electrical Characteristics

ON State Signal Level OFF State Signal Level

Load Current/Output Max Load Current/Group

Reverse-EMF Protection

2 A

Built-in circuitry limits inductive

spikes to a max -15V

Switch Capacity for Bulbs

5 W

(surge current = normal current x 10) OFF-ON Operations

0.28/s (ind. load @ max load current) 100/s (resistive load)

8/s (max lamp load) One Wire: 14 AWG;

Wire Size/Terminal

Two Wires: 20 AWG

Addressing Characteristics

Discrete I/O Points (Bits) Register I/O (registers)

0 in / 16 out 0 in / 1 out

Dimensions

WxHxD

40.3 x 145 x 117.5 mm (1.6 x 5.6 x 4.5 in.)

Weight

220 g (.5 lb.)

Agency Approvals

Designed to meet VDE 0160 and UL 508 Standards

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at artisantg.com for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today? (217) 352-9330 | sales@artisantg.com | artisantg.com

