## Gould B550-101 115 VAC Output Module



**\$145**.00

In Stock
Qty Available: 10+
Used and in Excellent Condition

**Open Web Page** 

https://www.artisantg.com/64025-49

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center



Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisantg.com | artisantg.com


Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

# B551-001 / 115 VAC Input Module DATA SHEET

The Gould B551-001, 115 VAC Input Module consists of four independent and isolated input circuits.

#### **FEATURES**

- Four independent 115 VAC input circuits per module
- · Circuits optically isolated from logic
- Input status indicators
- Transient protection
- Remove and replace while under power
- Remove and replace without disturbing field wiring
- May be mounted in full length, 8 module housing (B545) or half-high, 4 module housing (B546)
- UL listed and CSA certified
- Operates at 0 to 60°C
- Operates from 0 to 95% relative humidity (non-condensing)

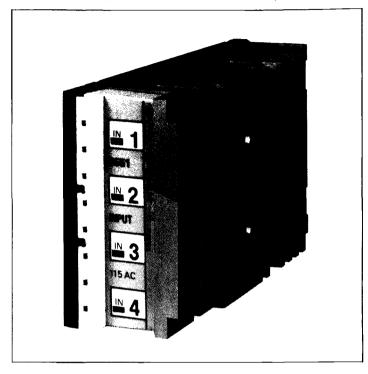

#### GENERAL DESCRIPTION

The Gould B551-001, 115 VAC Input Module converts four independent 115 VAC inputs into usable signals for the 184/384, 484, or 584 Controller. When using the 484 Controller, the 500 series modules are attached directly; an interface assembly (J540) is required with the 184/384 and 584 Controllers.


The B551 Input Module conditions signals from user equipment converting them into logic voltage levels used by the controller's processor. An input voltage of 80 to 130 VAC represents an ON condition. Each input is provided with a status indicator which is energized when the input is ON. The indicator devices are connected to the circuit's field side.

All inputs are fully isolated from the controller's logic by optical couplers. This


enables the controller to withstand the severe voltage transients normally encountered in industrial environments. Any damage or adverse effect to the controller is virtually eliminated. Each input also draws sufficient "wetting" current to inhibit the build-up of contaminants on the surface of silver contacts used on pushbuttons, limit switches, pressure switches, and other such devices.

The B551 Input Module measures 4.44 cm x 8.38 cm x 16.51 cm and weighs about .45 kg. User connections are made to standard barrier strips on the B545 or B546 I/O housing. This configuration permits a replacement of modules without disturbing the field wiring.



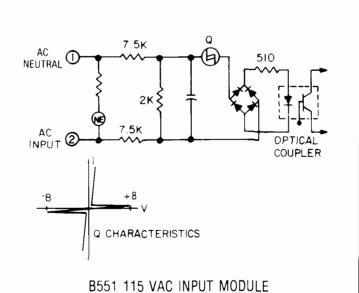

SIMPLIFIED SCHEMATIC

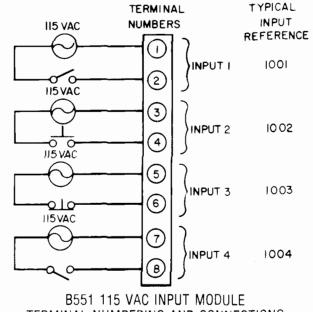

TERMINAL NUMBERING AND CONNECTIONS

#### SPECIFICATIONS

Topology	4 inputs per module 1 input per isolated group
(less than 1000 ohms	
	1500 VAC RMS for 1 sec.
Response Time	ON to OFF, 20ms (max) OFF to ON, 10ms (max)
Input Status Indicator	One neon lamp per input ON when input is ON
	•

#### **NOTES**

The B551-001 Input Module is capable of interconnection with the Gould B550 and B230 115 VAC Output Modules without the use of additional components.



## Artisan Technology Group is an independent supplier of quality pre-owned equipment

### **Gold-standard solutions**

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

#### Learn more!

Visit us at artisantg.com for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today? (217) 352-9330 | sales@artisantg.com | artisantg.com

