

HP M9195A

PXle Digital Stimulus/Response Module



In Stock

Used and in Excellent Condition

Open Web Page

<https://www.artisantg.com/92978-1>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship


- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

Keysight Technologies

M9195A PXIe Digital Stimulus/Response
with PMU: 250 MHz, 16-channel

Data Sheet

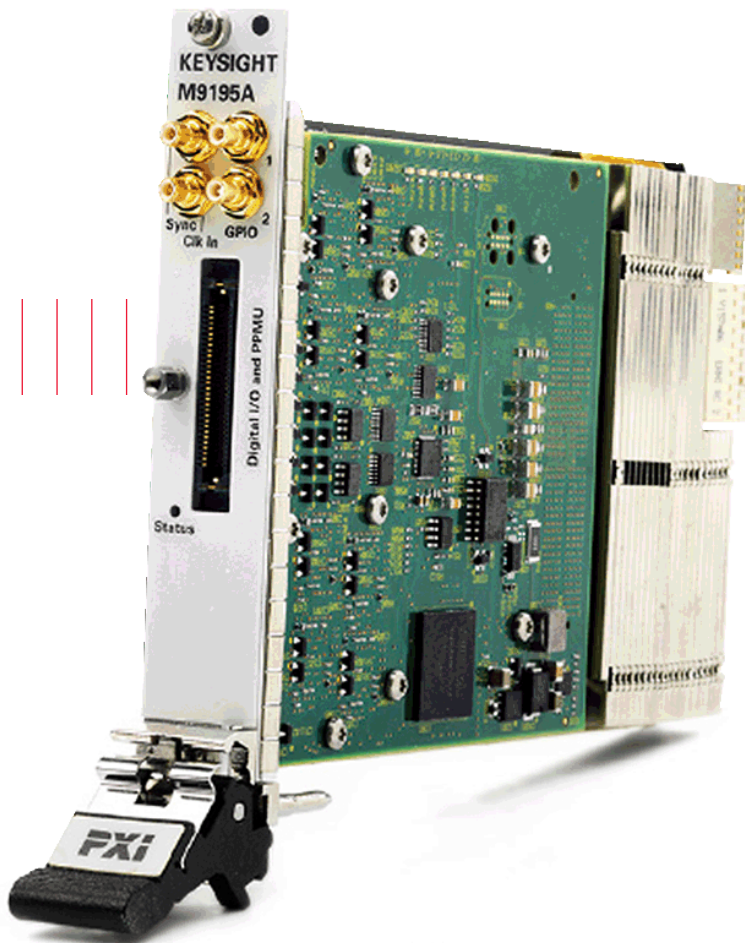

Overview

Experience high speed digital test capabilities at a whole new level. The Keysight Technologies, Inc. M9195A PXIe Digital Stimulus/Response (PXI DSR) module is ideal for IC design validation and production test environments. It goes beyond providing just standard capabilities. The new 16-channel, single slot PXI module introduces a high performance pattern cyclizer for powerful pattern creation including advanced timing capabilities such as multiple drive edges per cycle. This provides flexible edge placement and stimulus/response delays for timing margin testing or cable length compensation. Additionally, it can support up to four independent multi-sites with an independent sequencer for each site. Software tools included with the M9195A allow the user to modify vector and pattern parameters without requiring the user to recompile and download tests.

Additional ATE features include:

- High speed pattern application and RZ (Return-to-Zero) clock rate up to 250 MHz
- Per pin programming of voltage levels
- Real time compare, parametric measurement unit (PMU)
- Deep vector memory and flexible pattern sequencing

With the PXI DSR module you can easily emulate standard serial interfaces like the MIPI™ RF Front-End interface or proprietary parallel device interfaces. The test development software tools enable you to quickly create and edit waveform patterns or to import patterns created by automatic test generation applications.



Applications

- RFFE bus emulation used in PA/FEM semiconductor device verification or production test
- Wireless communication devices using parallel or serial digital control
- Automated test in product validation or manufacturing test
- Backplane emulation for device, board, or module testing
- Digital serial and parallel applications

Key features

- 16 bidirectional channels with per-pin programmable logic levels
- Highly flexible, per-bit timing control for fast and accurate waveform development
- Reconfigurable per-pin Parametric Measurement Unit (PMU) for each channel
- Single and multi-site configurations
- Edit patterns on-the-fly without recompiling and downloading the test
- Execute patterns in arbitrary order
- Flexible allocation of deep pattern memory per channel or per site to allocate memory where it is needed
- Channel delay adjustment to compensate for cable and fixture propagation delays
- 4 high voltage channels for flash programming or fuse test
- 4 open drain auxiliary output pins for fixture relays
- Comprehensive software tool set for quick test development

M9195A hardware overview

Individual channel capability

Each of the 16 bidirectional channels provide programmable logic levels of -1.5 V to +6.5 V with 152 μ V resolution. The per channel 4 quadrant parametric measurement unit (PMU) enables FVMI, FIMV, FVMV, and FIMI and FNMV modes. With the 5 PMU current ranges between $\pm 2 \mu$ A to ± 40 mA, users can make accurate leakage measurements.

Each channel can be configured for parametric measurements, as a static digital I/O pin, or with synchronized cyclized digital data. Digital channel direction and timing can be flexibly controlled on a per digital vector basis. The cyclized data allows each pin to operate in RZ or NRZ modes. In combination with the 1 ns edge placement resolution, each pin allows for an adjustable output delay, for timing margin testing, and receive delay to compensate for cabling propagation delays.

Multi-site capability

The PXI DSR provides a choice of a single-site configuration with 16 synchronized channels, or a multi-site configuration with 4 sets of 4 synchronized channels. In multi-site mode, each site has its own independent sequencer. This enables site independent clock operation for simultaneous testing. The multi-site capability simplifies test development. Instead of forcing the test engineer to create a single test that encompasses all for sites simultaneously, the user only needs to focus on a single device. The single device test can be easily replicated for the remaining test sites. In addition to the digital pins, each site has a high voltage drive channel and an open drain control channel for relay control.

Parametric Measurement Unit (PMU)

The PMU feature, available on each of the PXI DSR's 16 channels, enables DC current and voltage measurements. The PMUs can be independently programmed to force a voltage and measure the corresponding current, or force a current and measure the voltage. The PMU can make leakage current measurements at low current ranges or for measuring low input resistance in high current ranges. In a force voltage/measure current (FVMI) mode the PMU can measure input bias current on a single DUT pin. For high current applications, each channel has remote sense capability to account for the voltage drop across the connecting cable.

Perform continuity testing of a DUT by forcing current into the pin with other DUT pins grounded while measuring the voltage at the pin (FIMV). The FNMV mode (Force Nothing, Measure Voltage) enables the PMU to be used as a scanning voltmeter. The PMU provides built-in 64 sample, 50 Hz or 60 Hz averaging to improve measurement quality by rejecting power line noise. The PMUs share a 16-bit measurement subsystem for fast accurate measurements.



Flexible digital pattern generation

With the included software tools, easily create, modify and reuse previously defined patterns. Pattern timing is controlled using up to 32 waveform tables. Within the waveform table, each of the 15 user-defined vector characters is translated into one of the following hardware actions: Force High/Low (U/D), Force to previous state (P), Stop Forcing (Z), Compare High/Low (H/L), Compare to Tri-state (T), Don't Compare (X). Each vector period has two drive edges that are used when forcing a digital state and one receive edge used to compare digital data from the DUT. Edge placement resolution can be set as low as 1 ns and edge placement can vary from period to period so that oversampling is not required. The two drive edges enable the user to easily create a clock or other RZ formats from a single vector without requiring two vectors. The flexibility of the drive edges allow them to be changed on a per vector basis using the vector characters or by referencing a different waveform table.

The combination of the waveform tables and edge placement resolution simplifies the pattern programming. Variables and equations can be defined to allow the user to simultaneously modify timing relationships and edge placement.

Once compiled, the digital patterns are stored in the PXI DSR's on-board pattern cache. The PXI DSR executes the patterns from the cache in order to provide high test throughput. High-level pattern sequencing commands allow for high level macros which can be used to define timing sets, counted and uncounted looping of pattern blocks, conditional execution based upon matching parallel or serial patterns, or wait for software trigger advance.

Advance timing capabilities

Change pattern values that have been downloaded to the cache without recompiling. Pattern values can replace either parallel vectors or serial patterns. These powerful features allow you to quickly modify patterns directly from the API. The user can create pattern templates that are used to read or write to the DUT, then provide the vector information directly from the API.

Variables can be modified at the API level without recompiling the test pattern. This allows the user to control pattern timing or levels directly from the API. These advanced capabilities useful for test applications such as a timing or voltage level shmoo.

Serial and parallel digital bus emulation

The combination of the flexible pattern timing and sequencing features, enables the PXI DSR to emulate a wide variety of standard or custom serial/parallel protocols such as SPI and RFFE.

Comprehensive software tool set


Keysight offers a choice of drivers and programming environments to configure and control the PXI DSR during test development including:

- Full featured, high-level IVI-COM, IVI-C, LabVIEW programming interfaces through drivers
- IEEE-1450/ STIL, OpenXML (Excel), or text file format for programmatically defining patterns
- The M9195A Soft Front Panel for interactive test control and debug

These test development tools can be used in powerful combinations to match the DUT's test flow and test requirements.

Soft Front Panel (SFP)

The SFP assists the user in the development and application of test patterns, allows the user to change key test execution parameters, and allows the user to validate and compensate for test fixture connectivity. During pattern development, the user interactively loads and execute STIL, XML, or bulk data files. When loading, the tests are checked for correct syntax and the SFP generates error messages to help debug patterns. The SFP enables the user to the control various execution and response logging modes. In addition to these features, the SFP uses the same IVI interface driver calls. Each function initiated by the SFP logs an example driver call that can then be used in a regular API environment.

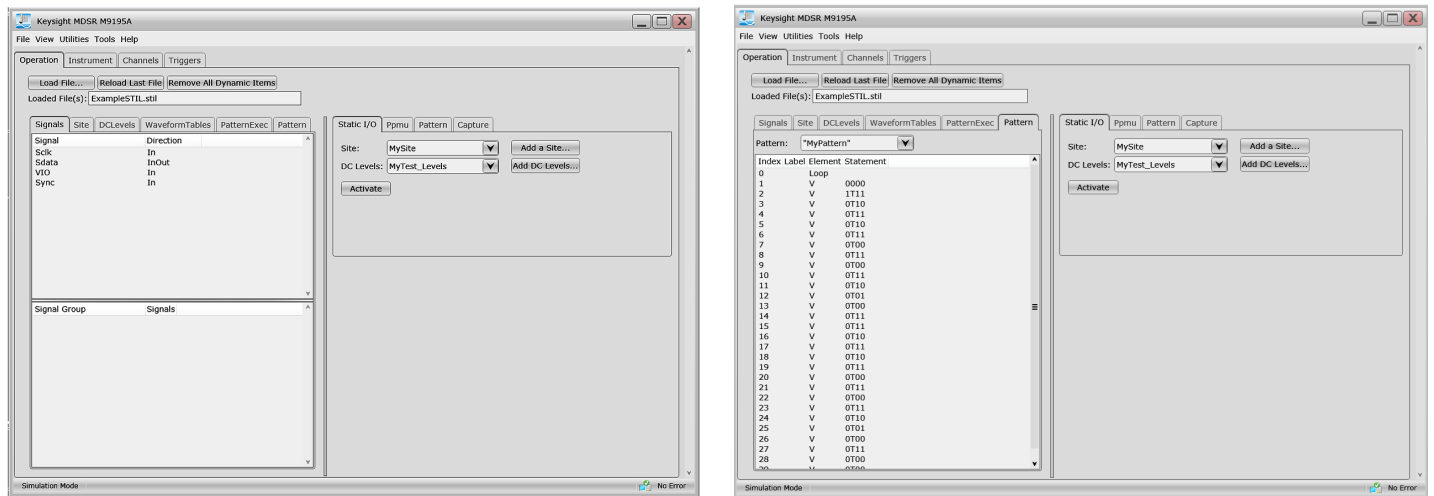

IVI and LabVIEW drivers

The IVI driver set can be used to fully control all aspects of test development using the DSR from assigning hardware pins to creating and executing waveform patterns using the M9195A. The drivers include high level commands for:


- Initial configuration including pin/channel names assignments, signal direction, grouping pins/channels to make vector definition easier.
- Setting physical layer conditions such as voltage levels, active loads
- Defining single or multisite configurations.
- Pattern definition and waveform timing.
- Pattern sequencing

Standard Test Interface Language (STIL) Support

The PXI DSR takes advantage of the Standard Test Interface language (STIL) IEEE Std 1450.0 which was designed for ATE testing. The PXI DSR can be configured using STIL commands that specify signal grouping, patterns, format, and timing information used to apply digital test vectors to a device being tested. Using a simple text editor and using the STIL format, attributes needed to generate digital patterns can quickly be created. STIL tests are easy to read and understand which simplifies test development and debug. Either the IVI API or the SFP can execute tests developed in STIL.

Bulk Data Import

The PXI DSR supports bulk data file import to load legacy and tool generated patterns. Bulk data import utilizes simple text files where the first row contains signal names and provides the option to a reference a waveform table. Each subsequent row represents the vectors which make up the patterns. The waveform table itself can be defined using the SFP, IVI driver, or STIL file. This provides a quick and easy way to develop production tests using patterns developed in R&D.

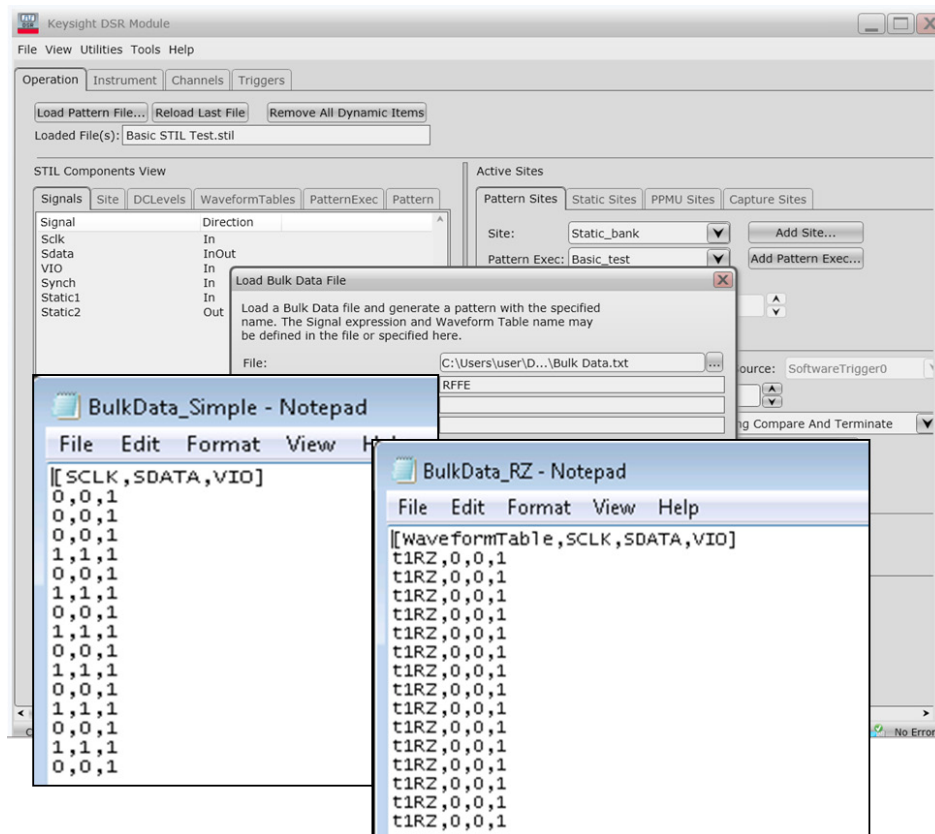


XML (.xlsx) programming interface

The XML interface allows the user to develop and debug tests in a spreadsheet form. The STIL methodology fits well with the multiple worksheet concepts provided in modern spreadsheet tools. Each worksheet matches a STIL function such as Signals, Waveform Tables, and Patterns. Digital patterns are tabular in nature and therefore fit very well into a spreadsheet. The spreadsheet provides an easy to use, flexible, and familiar interface for novice or expert users to quickly develop digital tests. All of the standard spreadsheet tools, such as equations, are available to help with pattern creation. This spreadsheet interface can be used to configure and control the M9195A channels and key features is provided as a standard development tool. Spreadsheet tests can be executed using either the SFP or associated IVI commands.

| | | | | | | | | | |
|---|--|-------------|--------|--------|--------|--------|--------|--------|--------|
| DsrExcelExampleE | | | | | | | | | |
| File Home Insert Page Layout Formulas Data Review View De | | | | | | | | | |
| Clipboard Font Alignment | | | | | | | | | |
| E9 1 | | | | | | | | | |
| A | B | C | D | E | F | G | H | I | |
| 1 | Pattern:MyFirstPattern | | | | | | | | |
| 2 | # This is a basic pattern. Note that several could be reasonably defined | | | | | | | | |
| 3 | # BTW, double slash for comment is a really bad choice for Excel. Better use something else | | | | | | | | |
| 4 | #Additional tables would require a PatternBurst block to define the sequence for the patterns. | | | | | | | | |
| 5 | Index | Control | Out[1] | Out[2] | Out[3] | Out[4] | Out[5] | Out[6] | Out[7] |
| 6 | 1 | | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 7 | 2 | | X | X | X | X | X | X | X |
| 8 | 3 | | 0 | 1 | 0 | 0 | 0 | 0 | 0 |
| 9 | 4 | | 0 | 0 | 1 | 0 | 0 | 0 | 0 |
| 10 | 5 | | 0 | 0 | 0 | 1 | 0 | 0 | 0 |
| 11 | 6 | Label1: | 0 | 0 | 0 | 0 | 1 | 0 | 0 |
| 12 | 7 | | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| 13 | 8 | GoTo Label1 | | | | | | | |
| 14 | 9 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15 | 10 | Loop [10] | | | | | | | |
| 16 | 11 | | 0 | H | H | H | L | L | L |
| 17 | 12 | | 0 | H | H | L | L | L | L |
| 18 | 13 | | 0 | H | L | L | L | L | L |
| 19 | 14 | | 0 | H | L | L | L | L | L |
| 20 | 15 | EndLoop | | | | | | | |

Simplified block diagram

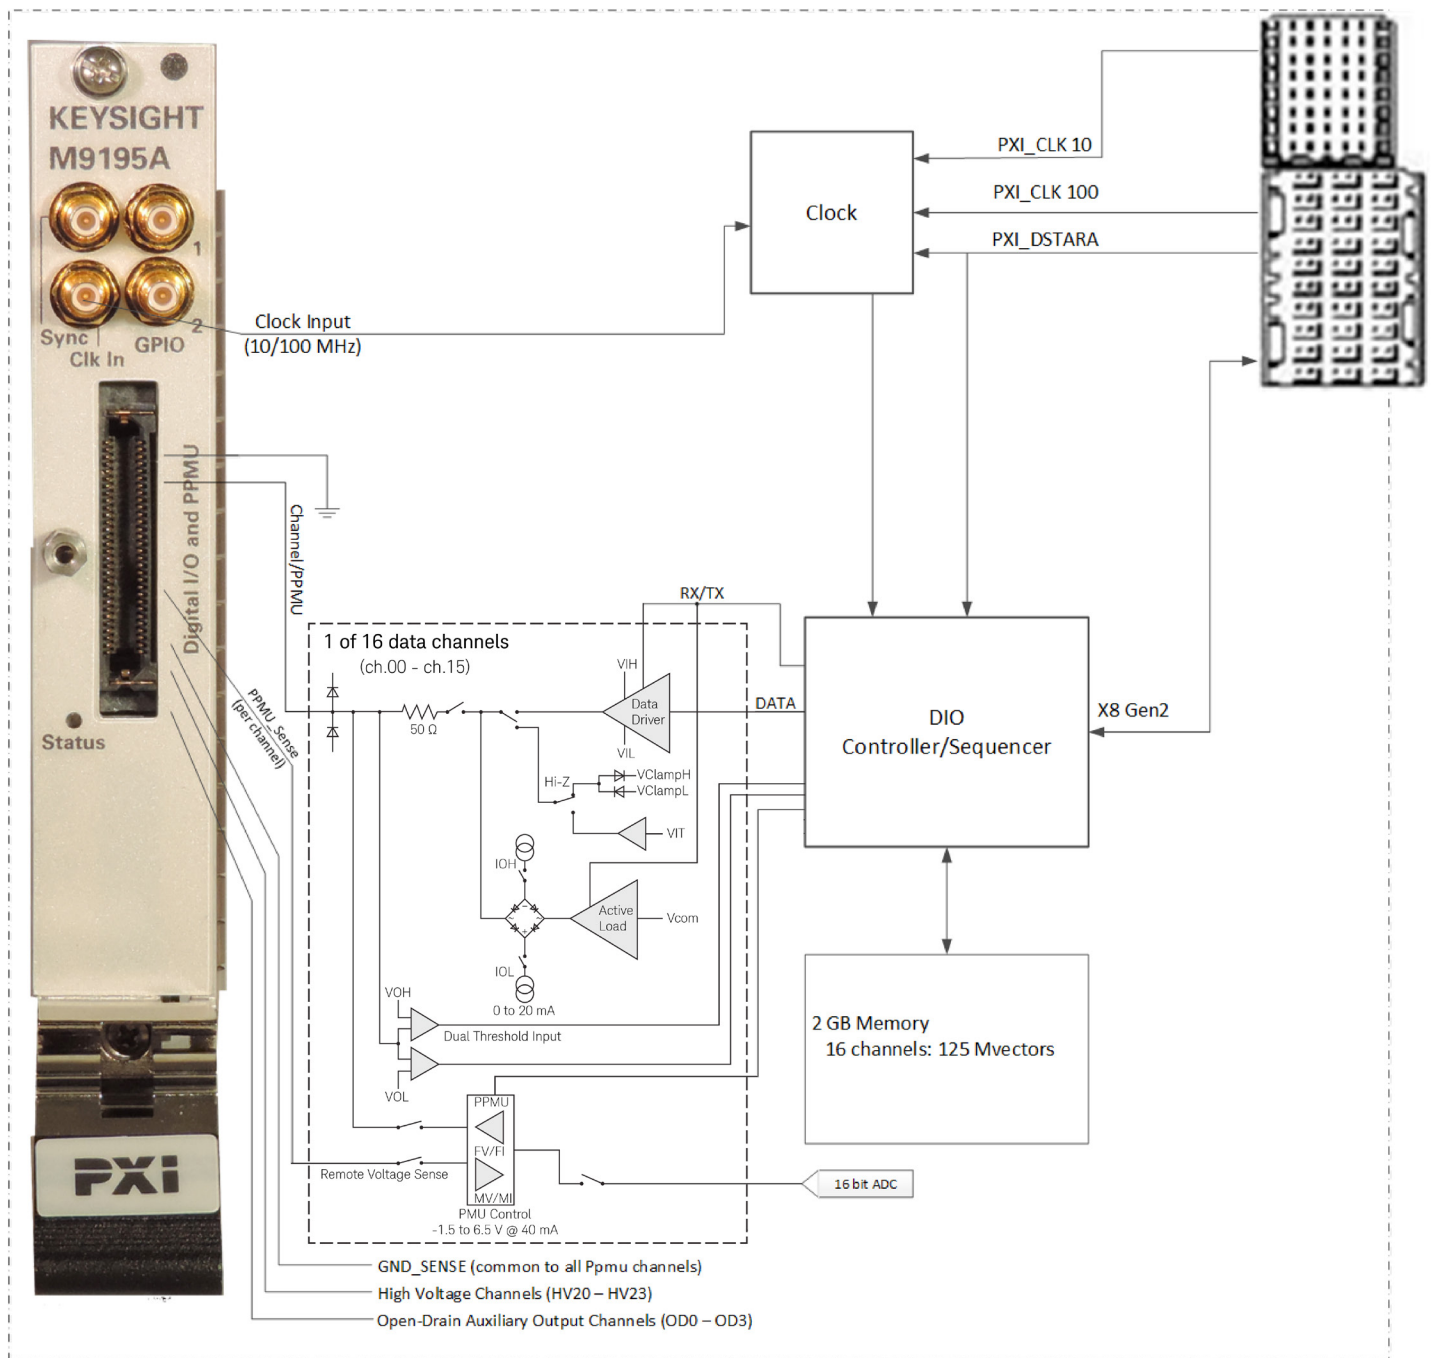

Accessories and cables are designed for easy, accurate, and reliable digital IO connections

Single-site (16 channels) signal cables

- Y1245A (0.5 meter), Y1246A (1 meter), or Y1247A (2 meter)
- 60 micro coax lines for 16 digital Ch, 16 PMU sense Ch, 4 high voltage Ch , and 4 open drain/grounds Ch
- Male Edge Rate with squeeze latches or thumb screw hood




Multi-site (4 sites of 4 channels) signal cables

- 1248A (1 meter) or Y1249A (2 meter)
- 16 Ch divided into 4 independent partitions (connectors)
- Each partition contains an Edge Rate connector with squeeze latch, 4 digital Ch, 4 PMU sense Ch, 1 high voltage Ch, and 1 open drain Ch
- 4 alternate thumb screw hoods are also provided for optional use




Evaluation and prototyping board

- Y1253A allows users to access individual signal pins for prototyping or debug.
- Board consists of 1 inch of signal header breakout pins, prototyping area with associated power connector, and signal termination pads.
- Offers 9in2 of bread board area, power/ground, includes headers for 16 channels, 16 PMU channels high voltage and open drain channels
- The Y1253A proto board is designed for use with the single-site, Y1245A, Y1246A and Y1247A, cables only.

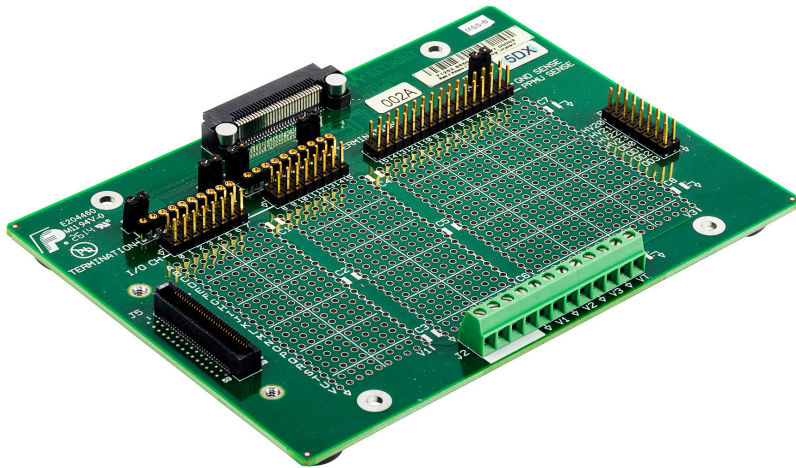

SMA breakout cables

- Y1254A (1 meter) and Y1255A (2 meter)
- Enables user access to individual signal pins/channels for prototyping or debug
- SMA connectors plus a header for low-speed signals.
- Cables work with both the single and multi-site configurations

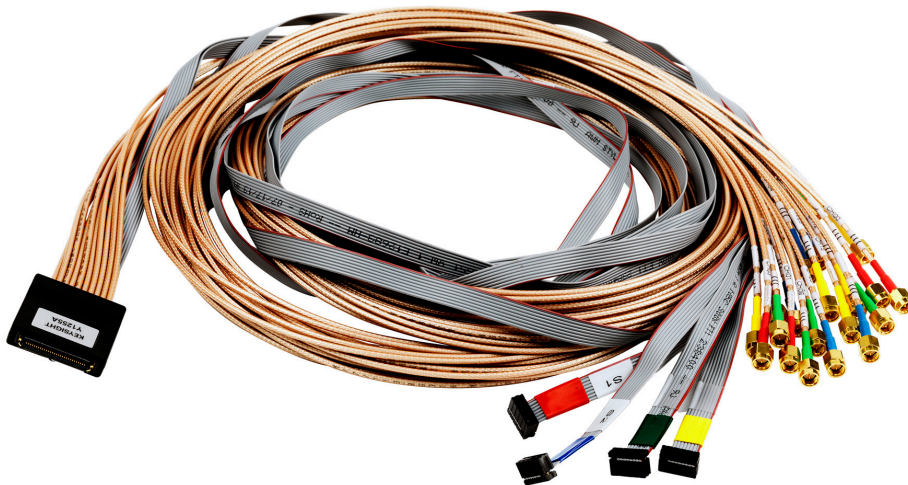

Definitions for specifications and characteristics

| | |
|------------------------|--|
| Specifications | <p>Warranted performance. Specifications include guardbands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions. All specifications and characteristics apply over the operating environment outlined in “Environmental and Regulatory” section of this data sheet. In addition, the following conditions must be met:</p> <ul style="list-style-type: none"> – Instrument has been turned on for 30 minutes with the PXI DSR software running. – Instrument is within its calibration cycle. – Instrument remains at a stable surrounding environment temperature (between 0°C to 45°C) for 1 hour prior to turn-on. <p>Specifications in this document are identified by an asterisk (*).</p> |
| Characteristics | A performance parameter that the product is expected to meet before it leaves the factory, but that is not verified in the field and is not covered by the product warranty. A characteristic includes the same guardbands as a specification. |
| Typical | Expected performance of an average unit at a stable temperature between 20°C to 30°C for 30 minutes prior to turn-on and during operation; does not include guardbands. It is not covered by the product warranty. The instrument must be within its calibration cycle. |
| Nominal | A general, descriptive term or design parameter. It is not tested, and not covered by the product warranty. Data represented in this document are nominal unless otherwise identified. |
| Best practices | <p>To ensure proper cooling, use Keysight slot blockers (Y1212A), filler panels (Y1213A), and the air inlet module kit (Y1214A) in the chassis when there are empty slots. Keysight chassis and filler panels optimize module temperature performance.</p> <p>At environmental temperatures > 40 °C, chassis fans should be set to high.</p> |
| Additional information | <p>All data are measured from multiple units at room temperature and are representative of product performance within the operating temperature range unless otherwise noted.</p> <p>The specifications contained in this document are subject to change.</p> |

Technical specifications and characteristics

General Characteristics

Module characteristics

| | |
|---|---|
| Bus interface & compatibility | PXI Express peripheral module (x1, x4, x8 PCIe® specification v 2.1) |
| Number of data channels | 16, per-channel parametric measurement unit (PPMU) |
| Number of sites per module | One 16 channel or four 4-channel sites |
| Maximum data rate for data channels | 250 Mbps |
| Maximum RTZ clock on data channels | 250 MHz |
| Number of high voltage channels | 4 |
| Number of auxiliary open drain channels | 4 |
| Number of GPIO channels | 2 ¹ |
| Module memory | 2 GB (allocated between pattern, response capture and sequence control) |

Front panel connectors

| | |
|------------------------------------|----------------------------|
| Data , open drain, HV, PPMU sense | ERCD30 |
| Reference clock input (REF CLK IN) | SMB connector |
| Sync in/out (SYNC) | SMB connector ¹ |
| GPIO 1 and GPIO 2 | SMB connector ¹ |

Mechanical characteristics

| | |
|---------------------------------|--|
| Dimensions (H x W x D) in mm | 3U/1-slot PXIe standard 130.1 x 21.7 x 210 mm; includes connector and handle extensions |
| Weight | 482 g |

1. Reserved for future use.

Technical specifications and characteristics

| DC Power Requirements | | |
|-------------------------|---------|---------|
| DC supply | Typical | Maximum |
| DC supply current: | | |
| +3.3 V | 3.0 A | 4.5 A |
| +12 V | 2.8 A | 3.2 A |
| Power dissipation (max) | 44 W | 53 W |

| Data Channel Characteristics | | |
|--|--|--|
| Characteristic | Value | Comments |
| * denotes warranted specification | | |
| Number of data channels | 16 | |
| Maximum pattern memory | 125 Mvectors per channel | |
| Channel type | Single-ended, ground reference | |
| Channel impedance | 50 Ω | Nominal |
| Direction control (In, Out, In/Out) | Per channel, per cycle (period) | |
| Per cycle digital states | 2 drive states, 1 receive state | |
| Programmable drive states | Force high, force low, force terminate | Terminate state either drives active termination or is high-Z with reflection clamps |
| Programmable receive states | Compare high, compare low, compare three-state, compare off | Three-state: a signal level between receive high and receive low thresholds |
| Programmable voltage setting | Per channel | |
| Drive/receive voltage range | -1.5 V to +6.5 V (16-bit with 152 μ V resolution) | VIH – VIL \geq 100 mV VIL (-1.5 V to +6.4 V) VIH (-1.4 V to +6.5 V) |
| Drive voltage accuracy * | \pm 25 mV (VIH & VIL) DUT centric | Maximum accuracy from \pm 5 ° C of AutoCorrections |
| Receive voltage accuracy * | \pm 20 mV (VOH & VOL) DUT centric | Hysteresis off. Maximum accuracy from \pm 5 ° C of AutoCorrections |
| Channel output short circuit current limit | \pm 75 mA, nominal | Maximum of 250 mA per module in combination with other channels |
| Channel rise time | <450 ps @ 1 V pp (programmed) <700 ps @ 3 V pp (programmed) <1250 ps @ 6 V pp (programmed) | Into 50 Ω , 20-80%, typical |
| Channel fall time | <450 ps @ 1 V pp (programmed) <700 ps @ 3 V pp (programmed) <1250 ps @ 6 V pp (programmed) | Into 50 Ω , 20-80%, typical |
| Minimum detectable voltage swing, receive | 40 mV | Nominal. Hysteresis off |
| High impedance leakage, receive | \pm 2 μ A | Nominal. Static or dynamic digital mode |
| Channel power-on state | high-Z | |
| Receive hysteresis settings | 0 mV, 50 mV, 100 mV | |
| Channel jitter | <25 ps RMS | Typical. EPR* = 1 ns |
| Channel to channel jitter | <25 ps RMS | Typical. EPR* = 1 ns |

*EPR = Edge Placement Resolution

Technical specifications and characteristics

| Data Channel Characteristics | | |
|--|--|--|
| Characteristic | Value | Comments |
| * denotes warranted specification | | |
| Active termination range | -1.5 V to +6.5 V (16-bit with 152 μ V resolution) | 50 Ω terminated into VIT |
| Active termination accuracy * | ± 25 mV (VIT) | Maximum accuracy from $\pm 5^\circ$ C of AutoCorrections |
| Reflection clamp range | -2 V to +7 V (16-bit with 152 μ V resolution) | VCH – VCL > 0.8 V VCL (-2 V to +6.2 V) VCH (-1.2 V to +7 V) |
| Reflection clamp accuracy | ± 30 mV @ 1 mA (VCH & VCL) ± 200 mV @ 10 mA (VCH & VCL) ± 400 mV @ 25 mA (VCH & VCL) | 50 Ω source impedance into clamps. Characteristic accuracy from $\pm 5^\circ$ C of AutoCorrections neglecting source impedance voltage drop |
| Active load range (IOH & IOL) | 0 mA to 25 mA (16-bit with 762 nA resolution) | Maximum of 250 mA per module in combination with other channels |
| Active load accuracy | ± 0.40 mA (IOH & IOL) | Characteristic accuracy from $\pm 5^\circ$ C of AutoCorrections |
| Commutation voltage range | -1.5 V to +6.5 V -1 V to +5.5 V | $ IOL \& IOH \leq 1$ mA $ IOL \& IOH \leq 25$ mA |
| Commutation voltage accuracy | ± 20 mV (VCOM) | Characteristic accuracy from $\pm 5^\circ$ C of AutoCorrections |

| High Voltage Channel Characteristics | | |
|--|--|---|
| Characteristic | Value | Comments |
| * denotes warranted specification | | |
| Number of high voltage channels | 4 | |
| Channel type | Single-ended, ground referenced | |
| Channel control | Shared with dependent data channel | Refer to user manual for HV control information HV20 shared with CH 02 HV21 shared with CH 06 HV23 shared with CH 10 HV24 shared with CH 14 |
| Channel impedance | <10 Ω (when forcing to terminate) 50 Ω (when forcing High or Low) | Nominal |
| Channel power-on state | Passive 50 Ω termination | |
| Maximum data rate | 10 MHz | |
| Programmable voltage range setting | Per channel | |
| HV drive range | 0 V to +13.5 V (16-bit with 305 μ V resolution) | Force terminate |
| HV drive accuracy * | ± 40 mV (VHH) | Maximum accuracy from $\pm 5^\circ$ C of AutoCorrections |
| Drive voltage range | -0.1 V to +6.5 V (16-bit with 152 μ V resolution) | Force high or low |
| Drive voltage accuracy * | ± 35 mV (VIH & VIL) | Maximum accuracy from $\pm 5^\circ$ C of AutoCorrections |
| HV drive settling time | < 4 μ s @ 13.5 V pp into 1 M Ω (1nF) < 350 μ s @ 13.5 V pp into 1 M Ω (1nF) | Settled to 1% of final value Typical |
| HV channel short circuit current limit | ± 60 mA, nominal | Maximum of 250 mA per module in combination with other channels. Nominal |

Technical specifications and characteristics

| High Voltage Channel Characteristics | | |
|---|---|---|
| Characteristic * denotes warranted specification | Value | Comments |
| Drive rise time | <9 ps @ 1 V pp (programmed) <10 ps @ 3 V pp (programmed) <11 ps @ 6 V pp (programmed) | Into 50 Ω , 20-80%, Typical |
| Drive fall time | <9 ps @ 1 V pp (programmed) <10 ps @ 3 V pp (programmed) <11 ps @ 6 V pp (programmed) | Into 50 Ω , 20-80%, Typical |
| Drive source/sink current per channel | ± 60 mA, nominal | Maximum of 250 mA per module in combination with other channels |

| Open Drain Channel Characteristics | | |
|---|--|---------------------------------------|
| Characteristic | Value | Comments |
| Number of auxiliary open drain channels | 4 | |
| Channel type | Output only, single-ended, ground referenced | |
| Channel termination | Open drain | Internal 10k Ω pull-up to +5 V |
| Sink current per channel | 1 A max | Nominal |
| Channel power-on state | Off | 10k Ω pull-up to +5 V |
| Maximum working voltage | + 12 Vdc | |

Technical specifications and characteristics

| PPMU Characteristics | | |
|--|--|--|
| Characteristic | Value | Comments |
| * denotes warranted specification | | |
| Number of PPMU channels | 16 | |
| PPMU modes | Force V measure V, Force V measure I, Force I measure I, Force I measure V, Force nothing measure V | |
| Measurement averaging modes | None, 64 averages, 50 Hz one PLC, 60 Hz one PLC | |
| Force voltage range | -2 V to +6.5 V ($ \text{Current} \leq 4 \text{ mA}$) -2 V to +6 V ($ \text{Current} \leq 25 \text{ mA}$) -2 V to +5.75 V ($ \text{Current} \leq 40 \text{ mA}$) (16-bit with 152 μV resolution) | |
| Force voltage accuracy * | $\pm 10 \text{ mV}$ | Maximum accuracy from $\pm 5^\circ \text{C}$ of AutoCorrections. Ground sense tied to ground. |
| Measure voltage accuracy * | $\pm 10 \text{ mV}$ | With remote sense. Maximum accuracy from $\pm 5^\circ \text{C}$ of AutoCorrections with one PLC averaging at sense location. Ground sense tied to ground |
| Force voltage settling time | < 20 μS (40 mA range) < 20 μS (1 mA range) < 25 μS (100 μA range) < 100 μS (10 μA range) < 525 μS (2 μA range) | 1 V rising and falling step settled to 1% of final value into 1M Ω / 1nF load. Typical |
| Force voltage stability | Stable at all ranges into 1 μF | Larger load capacitance possible, but response limited by current slew rate. |
| Current range | -40 mA to + 40 mA (16-bit with 2.44 μA resolution) | Maximum of 250 mA per module in combination with other channels |
| | -1 mA to + 1 mA (16-bit with 61 nA resolution) | |
| | -100 μA to + 100 μA (16-bit with 6.1 nA resolution) | |
| | -10 μA to + 10 μA (16-bit with 610 pA resolution) | |
| | -2 μA to + 2 μA (16-bit with 122 pA resolution) | |
| Force current accuracy * | $\pm 1\%$ of range | Maximum accuracy from $\pm 5^\circ \text{C}$ of AutoCorrections. Remote sense disconnected. |
| Measure current accuracy * | $\pm 1\%$ of range | Maximum accuracy from $\pm 5^\circ \text{C}$ of AutoCorrections with one PLC averaging. Remote sense disconnected. |
| Force current settling time | Dependent on load | |
| Channel leakage | $\pm 10 \text{ nA}$ | Typical |
| Remote sense | 16 channels 1 GND | Ground sense should be tied to ground at measurement location for maximum accuracy. |
| Remote sense leakage | $\pm 4 \text{ nA}$ | Typical |
| Force current voltage clamp range | -2 V to +6.5 V (16-bit with 152 μV resolution) | VCH > VCL VCL (-2 V to +4 V) VCH (0 V to +6.5 V) |
| Force current voltage clamp accuracy | $\pm 50 \text{ mV}$ | Characteristic accuracy from $\pm 5^\circ \text{C}$ of AutoCorrections |

Technical specifications and characteristics

| Timing and Trigger Specifications and Characteristics | | |
|---|---|--|
| Channel clock | | |
| Number of independent clock domains | 1 - when configured as a single, 16 channel site 4 - when configured as 4, 4 channel sites | Number of independent clocks depends on the number of sites selected |
| Maximum RZ clock rate on a data channel | 250 MHz | |
| Minimum RZ clock rate on a data channel | 5 mHz | |
| Clock jitter | <25 ps RMS | |
| Internal reference clock | | |
| Frequency | 100 MHz | |
| Accuracy | ±25 ppm | |
| Period jitter | <2 ps RMS | |
| Reference clock sources | PXI_CLK100, PXIe-DSTARA, CLK IN | |
| External reference clock input (SMB front panel) | | |
| Input frequency | 10 MHz or 100 MHz | |
| Input impedance (CLK IN) | 50 Ω | Nominal, AC coupled |
| Input voltage range (CLK IN) | +1.8 V to +3.3 V | |
| Lock range accuracy | ±25 ppm | |
| Duty cycle | 40 to 60% | |
| Channel timing (per channel) | | |
| Waveform timing change | Per vector | |
| Edge placement resolution (EPR) | 1 ns minimum | Dependent on waveform table period |
| Stimulus delay resolution per test: | | Edge Placement Resolution (EPR) is specified at the time of test activation. |
| – For $EPR \geq 1 \text{ ns}$ and $\leq 1.3 \text{ ns}$ | 24 ps | |
| – For $EPR > 1.3 \text{ ns}$ | EPR | |
| Stimulus delay range per test | 254 x EPR | |
| Response delay compensation resolution per test: | | Edge Placement Resolution (EPR) is specified at the time of test activation. |
| – For $EPR \geq 1 \text{ ns}$ and $\leq 1.3 \text{ ns}$ | 24 ps | |
| – For $EPR > 1.3 \text{ ns}$ | EPR | |
| Response delay compensation range per test | 254 x EPR | |
| Channel-to-channel skew | ±300 ps | At 1ns EPR |
| Trigger characteristics | | |
| Trigger sources | Software (API-driven) | |
| Waveform characteristics | | |
| Number of waveform tables | 32 | |
| Number of waveform characters | 15 (user definable) | |
| Generation waveform iteration count | Once, n times, infinite | |
| Receive post trigger sampling | 0 to full record waveform | |

Technical specifications and characteristics

| Environmental Characteristics | | |
|----------------------------------|--|---------------|
| Operating and storage conditions | Operating | Storage |
| Temperature | 0 to 45 °C | -40 to +70 °C |
| Humidity | Maximum 80% at 40°C (non-condensing) | |
| Altitude | 3,000 meters, de-rate max temperature by 5 °C above 2,000 meters | |
| Calibration interval | 1 year: return to Keysight service center or use Y1252A with N7800A/N7867A | |
| Mechanical | | |
| Operating vibration | 5-500 Hz: 0.21 g RMS, random | |
| Survival sine vibration | 5-500 Hz: 0.5 g (0 to peak), swept sine | |
| Survival random vibration | 5-500 Hz: 2.09 g RMS, random | |
| Transportation shock | 125 G, 8.6 m/s, trapezoidal pulse | |
| End use handling shock | 1.6 m/s, <3 msec duration, half-sine pulse | |
| Warm-up time | 30 minutes | |

Samples of this product have been type tested in accordance with the Keysight environmental test manual and verified to be robust against the environmental stresses of storage, transportation and end-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude, and power line conditions. Test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class3.


| Regulatory |
|---------------------------------------|
| Safety |
| IEC/ EN 61010-1 USA: ANSI/UL 61010 |
| EMC |
| IEC 61326-1 |

Module Calibration

Both adjustment and performance verification is required to calibrate M9195A modules. Self-maintainers can perform these procedures by using software available from Keysight:

- N7800A Test management environment
- N7876A PXI digital IO calibration application

Module adjustment requires the Y1252A adjustment cable. This accessory consists of three cable assemblies necessary for voltage and current adjustments of the M9195A. These cables are used with a high-end digital multimeter (DMM) to adjust on-board analog-digital conversion. The N7876A is required to make adjustments using this cable.

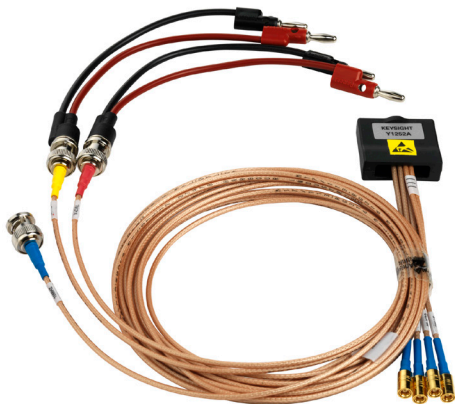

Other instruments and hardware is required for calibration. The N7876A WebHelp file lists the equipment required for adjustment and verification of the M9195A when using the N7800A and N7876A. For more details and access to the N7876A WebHelp file see: <http://cal.software.keysight.com/>.

Software information

| | |
|--|--|
| Supported operating systems | Microsoft Windows 7 (32/64-bit) |
| Standard compliant drivers | IVI-COM, IVI-C, MATLAB |
| Supported application development environments (ADE) | VisualStudio (VB.NET, C#, C/C++), VEE, LabVIEW, LabWindows/CVI, MATLAB |
| Keysight IO libraries (version 16.3 update 2 or newer) | Includes: VISA libraries, Keysight Connection Expert, IO monitor |
| Keysight command expert | Instrument control for SCPI or IVI-COM drivers |

Ordering information



| Model | Description |
|-------------------------------|---|
| M9195A | PXIe Digital Stimulus/Response with PPMU: 250 MHz, 16 Ch |
| M9195A-M12 | Memory, 125 Mb/channel |
| M9195A-S04 | Multi-site configuration |
| M9195A-SR2 | Maximum clock rate, 250 MHz |
| Accessories and cables | |
| Y1245A | Single-site DSR cable: 0.5 m |
| Y1246A | Single-site DSR cable: 1m |
| Y1247A | Single-site DSR cable: 2m |
| Y1248A | Multi-site DSR cable: 1m |
| Y1249A | Multi-site DSR cable: 2m |
| Y1252A | DSR adjustment cable |
| Y1253A | DSR Evaluation and prototyping board |
| Y1254A | DSR SMA breakout cable: 1m |
| Y1255A | DSR SMA breakout cable: 2m |

Related products

M9381A PXIe Vector Signal Generator: 1 MHz to 3 GHz or 6 GHz
 M9393A PXIe Performance Vector Signal Analyzer: 9 kHz to 27 GHz
 M9371A PXIe Vector Network Analyzer, 300 kHz to 6.5 GHz
 M9300A PXIe Frequency Reference: 10 MHz and 100 MHz
 M9018A PXIe 18-Slot Chassis
 M9037A PXIe High Performance Embedded Controller

From Hewlett-Packard through Agilent to Keysight

For more than 75 years, we've been helping you unlock measurement insights. Our unique combination of hardware, software and people can help you reach your next breakthrough. **Unlocking measurement insights since 1939.**



1939 THE FUTURE

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.

Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Infoline

www.keysight.com/find/service

Keysight Infoline

Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

PCI-SIG®, PCIe® and the PCI Express® are US registered trademarks and/or service marks of PCI-SIG.

www.keysight.com/find/m9195a

www.keysight.com/find/modular

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

| | |
|---------------|------------------|
| Canada | (877) 894 4414 |
| Brazil | 55 11 3351 7010 |
| Mexico | 001 800 254 2440 |
| United States | (800) 829 4444 |

Asia Pacific

| | |
|--------------------|----------------|
| Australia | 1 800 629 485 |
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 11 2626 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Other AP Countries | (65) 6375 8100 |

Europe & Middle East

| | |
|----------------|---------------|
| Austria | 0800 001122 |
| Belgium | 0800 58580 |
| Finland | 0800 523252 |
| France | 0805 980333 |
| Germany | 0800 6270999 |
| Ireland | 1800 832700 |
| Israel | 1 809 343051 |
| Italy | 800 599100 |
| Luxembourg | +32 800 58580 |
| Netherlands | 0800 0233200 |
| Russia | 8800 5009286 |
| Spain | 800 000154 |
| Sweden | 0200 882255 |
| Switzerland | 0800 805353 |
| | Opt. 1 (DE) |
| | Opt. 2 (FR) |
| | Opt. 3 (IT) |
| United Kingdom | 0800 0260637 |

For other unlisted countries:
www.keysight.com/find/contactus
(BP-09-28-15)



www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System



Unlocking Measurement Insights

This information is subject to change without notice.
© Keysight Technologies, 2014 - 2015
Published in USA, December 15, 2015
5992-0115EN
www.keysight.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanTG.com | [artisanTG.com](https://www.artisanTG.com)

