

## HP N1810TL Coaxial Switch



**\$495.00**

**In Stock**

**Qty Available: 2**

**Used and in Excellent Condition**

**Open Web Page**

<https://www.artisantg.com/91640-1>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center


Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

# Keysight Technologies

## N1810/1/2 Coaxial Switches

High Performance Electromechanical Switches for  
Microwave and RF Manufacturing Test Systems

### Technical Overview

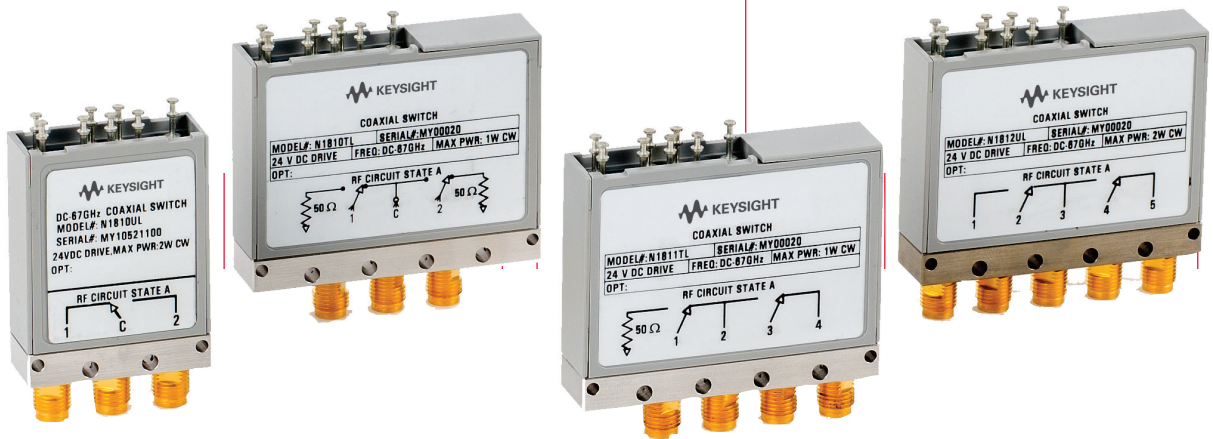

Unlocking Measurement Insights

# Introduction

## Key Features

- Insertion loss repeatability: < 0.03 dB up to 40 GHz and < 0.08 at 67 GHz up to 5 million cycles
- High isolation: > 120 dB at 4 GHz and > 70 dB at 67 GHz
- Low SWR: < 1.10 at 4 GHz and < 1.90 at 67 GHz
- Low-insertion loss: < 0.27 dB at 4 GHz and < 1.12 at 67 GHz
- Long life: 5 million cycles, 10 million cycles typical

## Key Applications

- Radar and satellite testing
- Wireless W-HDMI device testing
- Microwave backhaul applications
  - DC to 4 GHz
  - DC to 20 GHz
  - DC to 26.5 GHz
  - DC to 40 GHz
  - DC to 50 GHz
  - DC to 67 GHz

In today's fast moving technical industries, test engineers need components they can count on. Keysight Technologies, Inc. offers a line of latching coaxial switches that combine legendary reliability with the widest range of performance options available today.

## Reduce downtime

Keysight Technologies is the world leader in innovating and developing microwave accessories for communications and aerospace applications. Our innovative design and strict adherence to quality process control ensure that each switch is guaranteed to perform within warranted specifications for its entire lifetime. With fewer breakdowns and less need to recalibrate, your test system moves quicker with less downtime, creating more throughput and revenue.

## Raise your standards

All Keysight switches offer excellent repeatability and long life – up to five times the lifecycles of the competition. Add to this aggressive specs for isolation, SWR, and insertion loss, and you have a switch that impresses even the most demanding engineer with its precision and durability.

## Increase flexibility

For test systems that require extra functionality or increased performance, the N181x family of switches has a solution that fits your need. The options include:

- Reduced SWR
- Increased isolation
- Standard or TTL drive
- 5, 15, 24 volt drive
- Position indicators

## Increase productivity

When you buy your switches from Keysight, you notice a difference. Your test platforms run smoother, longer and faster, while yielding more viable and valuable measurements.

## Description

### N1810UL

#### Unterminated latching

The Keysight N1810UL is a single-pole double-throw switch available in the frequency range from DC to 67 GHz. In precision measurements and monitoring applications where insertion loss repeatability is crucial, these switches operate in excess of 5 million cycles with better than 0.03 dB of insertion loss repeatability at 25 °C.

### N1810TL

#### Terminated latching

The Keysight N1810TL is a single-pole double-throw switch available in the frequency range from DC to 67 GHz. The unused port is terminated 50  $\Omega$ , making it ideal for applications where port matching is required.

### N1811TL

#### Terminated latching

The N1811TL is a terminated bypass switch available in the frequency range from DC to 67 GHz. The switch's internal load can terminate the device under test when in the bypass mode (up to 1 watt). Because of its compact design, it is ideal for drop-in, drop-out applications.

### N1812UL

#### Unterminated latching

The N1812UL is a versatile, unterminated 5-port switch available in the frequency range from DC to 67 GHz. In transfer switch applications, the fifth port can be terminated externally with a high-power termination. It can also be utilized for signal path reversal or as a calibration port.

## Technology

Keysight switches are designed with a rectangular coaxial structure similar to edge-line. This transmission line structure provides for movement of the edge-line center conductor between two fixed, continuous ground planes. The main advantage of this innovation is that the moving contacts can be easily activated, yet maintain high-isolation and low-insertion loss.

The RF contact configuration is designed for controlled wiping action. Since the outer conductor is not part of the switching function, repeatability and life are improved. The switching action occurs typically within 15 milliseconds, after which permanent magnets latch the contacts to retain the new switch position.

## Operation

All switches are “break before make,” the switched ports are not connected to each other. This prevents damage to sensitive circuits and enhances test simplicity.

### Driving

There are two positions for the N181x family of switches. Standard switching is accomplished by applying the supply voltage to pin 5 (+V) and grounding either pin 4 (A) or pin 3 (B) to actuate the mechanism to the desired state. See page 5, pin-out diagram.

Warning minimum switch spacing is 6.0 mm (0.25 inch).

The N181x comes with current interrupt, the drive current is automatically disconnected after the switch is fully latched (15 ms).

*Note: Prior to current interrupts becoming standard on the N181x, Option 403 current interrupt was available for ordering.*

**Option 401** drives the switch with TTL/5V CMOS compatible logic, which controls the DC power supply to drive the switch.

**Option 402** provides electronic indication of switch state. The circuitry consists of two independent commons, which can be connected to outputs corresponding to either position A or B. Because the commons are electrically isolated from each other as well as the drive circuit, this option allows two position signals to be obtained.

*Note: For option 402 (position indicator): To achieve maximum system stability, it is recommended to do a pre-cycling of minimum 100 cycles if the switch has been in storage or idling for an extended period of time.*

## Specifications

Specifications describe the instrument’s warranted performance. Supplemental and typical characteristics are intended to provide information useful in applying the instrument by giving typical, but not warranted performance parameters.

### General

|                           |   |
|---------------------------|---|
| Maximum power rating      |   |
| Into internal termination | 1 W CW, 7 VDC, 50 W pk, 10 μs max pulse duration, not to exceed 1 W average   |
| Into thru path            |   |
| Hot switching             | 2 W CW, 10 VDC, 100 W pk, 10 μs max pulse duration, not to exceed 2 W average |
| Coil voltage              | 5, 15, 24 VDC   |
| Connector                 | Option 004/020/026 SMA (f)  |
|                           | Option 040 2.92 mm (f)  |
|                           | Option 050 2.40 mm (f)  |
|                           | Option 067 1.85 mm (f)  |

### Standard performance specifications – N1810/1/2 Series (Frequency Options 004/020/026)

Isolation (dB) =  $90 - \left(\frac{30}{26.5}\right) F$ , where F is specified in GHz

| DC | 4 GHz | 12.4 GHz | 20 GHz | 26.5 GHz |
|----|-------|----------|--------|----------|
| 90 | 85    | 76       | 67     | 60       |

Insertion loss (dB) =  $0.35 + \left(\frac{0.45}{26.5}\right) F$ , where F is specified in GHz

| DC   | 4 GHz    | 12.4 GHz   | 20 GHz      | 26.5 GHz    |
|------|----------|------------|-------------|-------------|
| 0.35 | 0.42     | 0.56       | 0.69        | 0.80        |
| SWR  | DC-4 GHz | 4-12.4 GHz | 12.4-20 GHz | 20-26.5 GHz |
|      | 1.15     | 1.25       | 1.30        | 1.60        |

## Specifications (continued)

### Standard performance specifications – N1810/1/2 Series (Frequency Options: 040/050/067)

Isolation (dB) =  $100 - \left( \frac{30}{26.5} \right) F$ , where F is specified in GHz (Formula Does not apply when  $F > 26.5$  GHz)

| DC  | 4 GHz | 12.4 GHz | 20 GHz | 26.5 GHz | 40 GHz | 50 GHz | 67 GHz |
|-----|-------|----------|--------|----------|--------|--------|--------|
| 100 | 95    | 85       | 77     | 70       | 70     | 70     | 70     |

Insertion loss (dB)

Frequency Option 040:  $0.35 + \left( \frac{0.45}{26.5} \right) F$ , where F is specified in GHz (DC to 40 GHz)

Frequency Option 050:  $0.2 + \left( \frac{0.80}{26.5} \right) F$ , where F is specified in GHz (DC to 50 GHz)

Frequency Option 067:  $0.35 + \left( \frac{0.45}{26.5} \right) F$ , where F is specified in GHz (DC to 26.5 GHz)

$0.59 + \left( \frac{0.53}{67} \right) F$ , where F is specified in GHz (26.5 to 67 GHz)

|            | DC   | 4 GHz | 12.4 GHz | 20 GHz | 26.5 GHz | 40 GHz | 50 GHz | 67 GHz |
|------------|------|-------|----------|--------|----------|--------|--------|--------|
| Option 040 | 0.35 | 0.41  | 0.56     | 0.68   | 0.80     | 1.02   | –      | –      |
| Option 050 | 0.20 | 0.26  | 0.40     | 0.52   | 0.62     | 0.84   | 1.00   | –      |
| Option 067 | 0.35 | 0.41  | 0.56     | 0.68   | 0.80     | 0.91   | 0.99   | 1.12   |
| SWR        | DC   | 4 GHz | 12.4 GHz | 20 GHz | 26.5 GHz | 40 GHz | 50 GHz | 67 GHz |
| Option 040 | 1.15 | 1.15  | 1.25     | 1.40   | 1.60     | 1.80   | –      | –      |
| Option 050 | 1.15 | 1.15  | 1.25     | 1.50   | 1.60     | 1.80   | 1.80   | –      |
| Option 067 | 1.15 | 1.15  | 1.25     | 1.30   | 1.70     | 1.90   | 1.90   | 1.90   |

### Optional high-performance specifications – N1810/1/2 Series (not applicable for Frequency Options 040/050/067)

Isolation (dB) =  $125 - \left( \frac{35}{26.5} \right) F$ , where F is specified in GHz


|                         | DC  | 4 GHz | 12.4 GHz | 20 GHz | 26.5 GHz |
|-------------------------|-----|-------|----------|--------|----------|
| Option 301 <sup>1</sup> | 125 | 120   | 109      | 99     | 90       |

Insertion loss (dB) =  $0.20 + \left( \frac{0.45}{26.5} \right) F$ , where F is specified in GHz


|            | DC       | 4 GHz      | 12.4 GHz    | 20 GHz      | 26.5 GHz |
|------------|----------|------------|-------------|-------------|----------|
| Option 302 | 0.2      | 0.27       | 0.41        | 0.53        | 0.65     |
| SWR        | DC-4 GHz | 4-12.4 GHz | 12.4-20 GHz | 20-26.5 GHz |          |
| Option 302 |          | 1.10       | 1.20        | 1.23        | 1.45     |

1. Option 301:  
Storage and cycling temperature: –55 °C to +65 °C  
Operating temperature: –25 °C to +65 °C

N1810UL

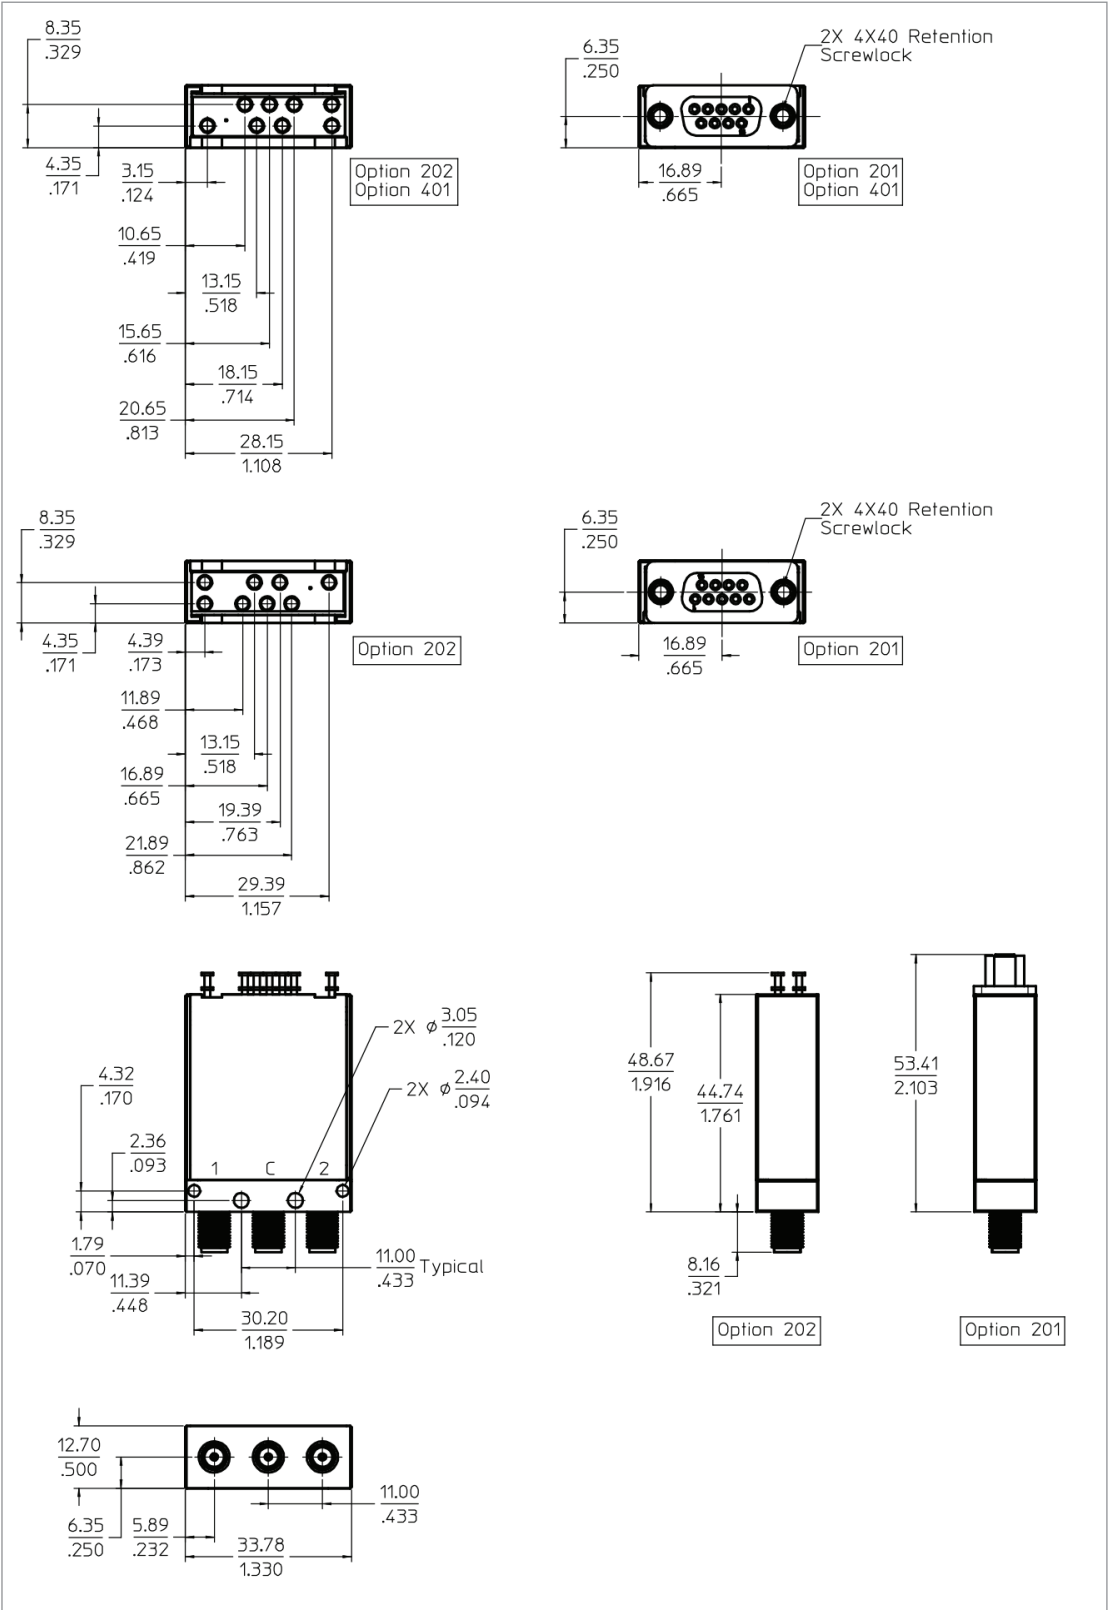

N1810UL



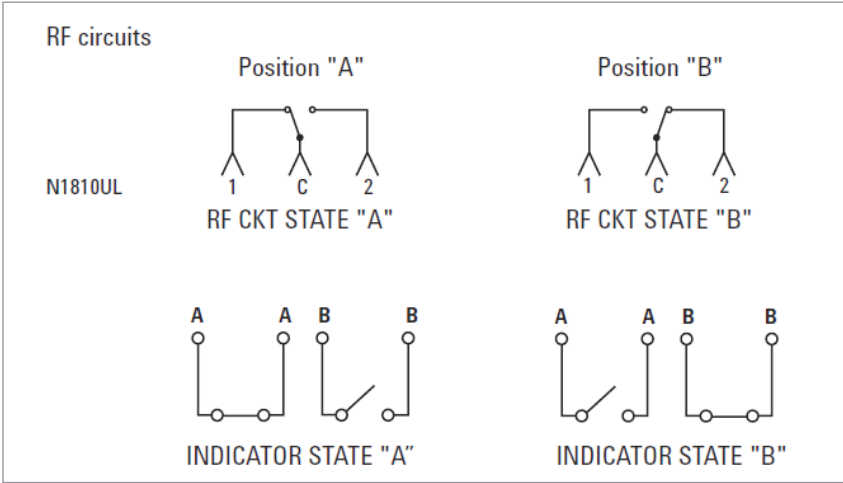


| Switch drive specifications N1810UL |                |                       |      |         |      |       |
|-------------------------------------|----------------|-----------------------|------|---------|------|-------|
| Option                              | Parameter      | Conditions            | Min  | Nominal | Max  | Units |
| 105                                 | Supply voltage |                       | 4.5  | 5       | 7.0  | V     |
|                                     | Supply current | Supply voltage = 5 V  |      | 300     |      | mA    |
| 115 <sup>1</sup>                    | Supply voltage |                       | 12.0 | 15      | 20.0 | V     |
|                                     | Supply current | Supply voltage = 15 V |      | 125     |      | mA    |
| 124 <sup>2</sup>                    | Supply voltage |                       | 20.0 | 24      | 32.0 | V     |
|                                     | Supply current | Supply voltage = 24 V |      | 75      |      | mA    |

| TTL drive specifications |                   |                        |     |         |      |       |
|--------------------------|-------------------|------------------------|-----|---------|------|-------|
| Option                   | Parameter         | Conditions             | Min | Nominal | Max  | Units |
| 401                      | High level input  |                        | 3.0 |         | 12.0 | V     |
|                          | Low level input   |                        | 0.0 |         | 1.0  | V     |
|                          | Max input current | Input voltage = 12.0 V |     |         | 1.0  | mA    |
|                          |                   | Input voltage = 3.85 V |     | 0.25    | 0.5  | mA    |

| Driving the switch*  |      |                                    |    |                                  |                 |
|--|------|------------------------------------|----|----------------------------------|-----------------|
| STD drive connect<br>GND to ground   |      | TTL drive connect<br>GND to ground |    | RF state                         | INDICATOR state |
| A  | B    | A                                  | B  |                                  |                 |
| GND  | OPEN | Hi                                 | Lo | "A"                              | "A"             |
| OPEN   | GND  | Lo                                 | Hi | "B"                              | "B"             |
| GND  | GND  | Hi                                 | Hi | Indeterminate                    | NA              |
| OPEN   | OPEN | Lo                                 | Lo | Switch remains at previous state | NA              |
| GND: +V - Vsupply (see switch drive specification table, this page)                |      |                                    |    |                                  |                 |
| OPEN* +V to +V - 1.5 volts   |      |                                    |    |                                  |                 |
| Hi 3.0 V to 12.0 V   |      |                                    |    |                                  |                 |
| Lo 0.0 V to 1.0 V Warning drive level below -0.25 V will damage TTL drive circuit! |      |                                    |    |                                  |                 |
| * WARNING! Use adapter cable 11764-60011 with 87130A switch driver                 |      |                                    |    |                                  |                 |
| WARNING! Minimum switch spacing 6.0 mm (0.25 inch)                                 |      |                                    |    |                                  |                 |

- Option 115: Operating life: 5 million cycles minimum, except 1 million cycles minimum when driven at voltages 18-20 VDC.
- Option 124: Operating life: Operating life: 5 million cycles minimum, except 1 million cycles minimum when driven at voltages 28-32 VDC.

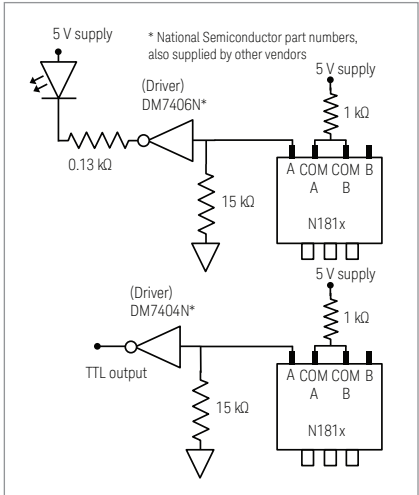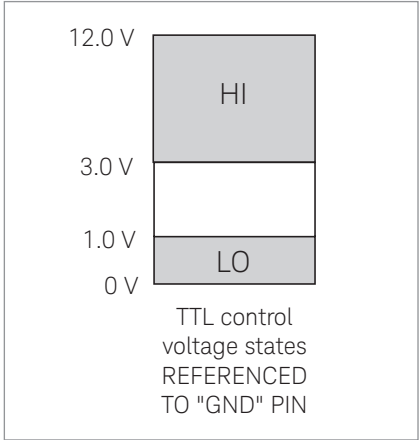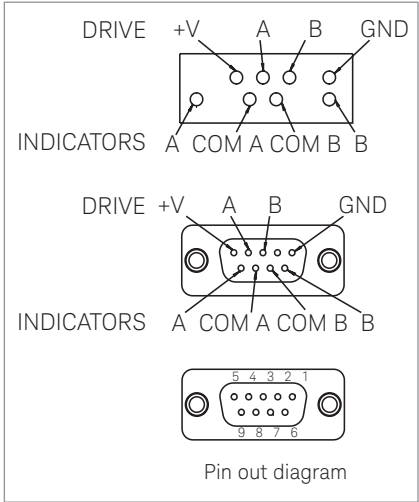


Recommended indicator circuit


Note: For option 402 (position indicator): To achieve maximum system stability, it is recommended to do a pre-cycling of minimum 100 cycles if the switch has been in storage or idling for an extended period of time.



N1810TL

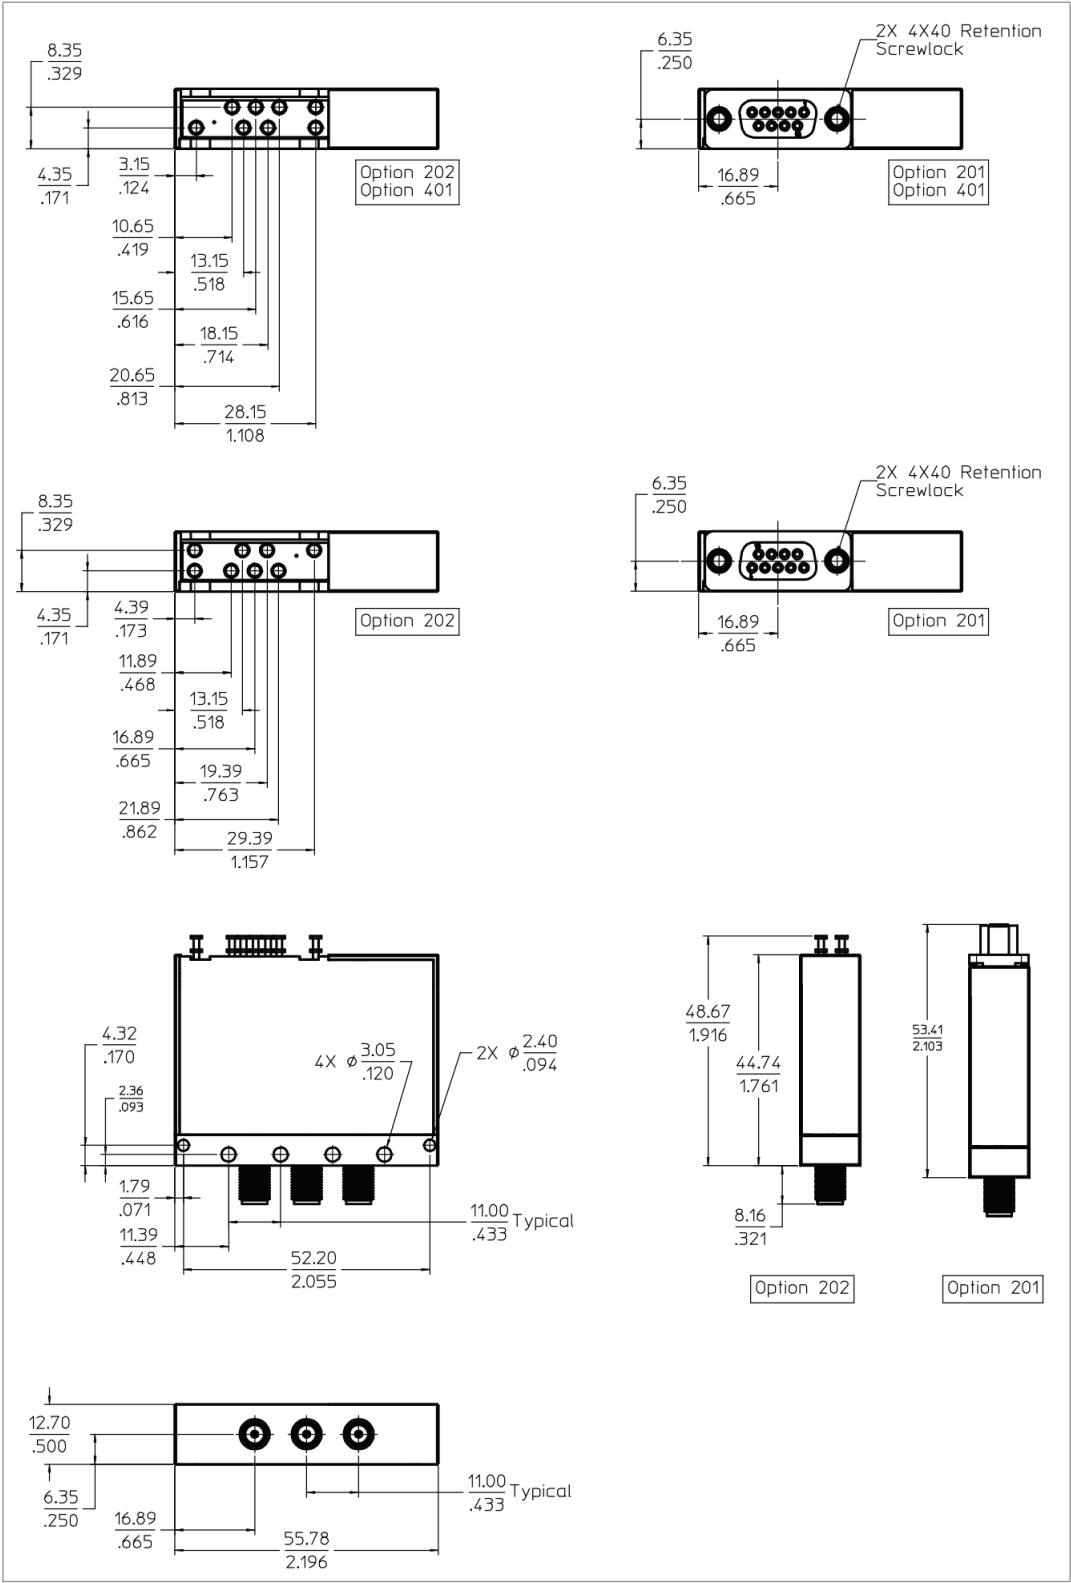

N1810TL

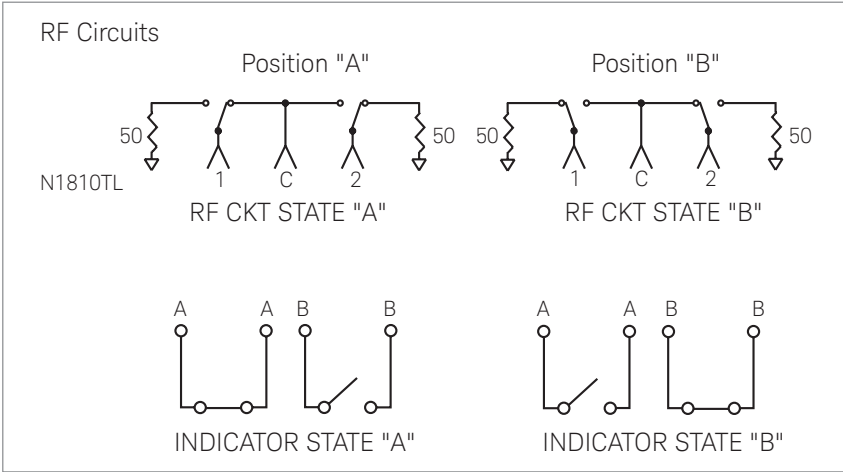




| Switch drive specifications N1810TL, N1811TL, N1812UL |                |                       |      |         |      |       |
|---|----------------|-----------------------|------|---------|------|-------|
| Option  | Parameter      | Conditions            | Min  | Nominal | Max  | Units |
| 105   | Supply voltage |                       | 4.5  | 5       | 7.0  | V     |
|   | Supply current | Supply voltage = 5 V  |      | 600     |      | mA    |
| 115 <sup>1</sup>                                      | Supply voltage |                       | 12.0 | 15      | 20.0 | V     |
|   | Supply current | Supply voltage = 15 V |      | 250     |      | mA    |
| 124 <sup>2</sup>                                      | Supply voltage |                       | 20.0 | 24      | 32.0 | V     |
|   | Supply current | Supply voltage = 24 V |      | 150     |      | mA    |

| TTL drive specifications |                   |                        |     |         |      |       |
|--------------------------|-------------------|------------------------|-----|---------|------|-------|
| Option                   | Parameter         | Conditions             | Min | Nominal | Max  | Units |
| 401                      | High level input  |                        | 3.0 |         | 12.0 | V     |
|                          | Low level input   |                        | 0.0 |         | 1.0  | V     |
|                          | Max input current | Input voltage = 12.0 V |     |         | 1.0  | mA    |
|                          |                   | Input voltage = 3.85 V |     | 0.25    | 0.5  | mA    |

| Driving the switch* |      |                   |    |                                  |                 |
|---------------------|------|-------------------|----|----------------------------------|-----------------|
| STD drive connect   |      | TTL drive connect |    | RF state                         | INDICATOR state |
| GND to ground       |      | GND to ground     |    |                                  |                 |
| A                   | B    | A                 | B  |                                  |                 |
| GND                 | OPEN | Hi                | Lo | "A"                              | "A"             |
| OPEN                | GND  | Lo                | Hi | "B"                              | "B"             |
| GND                 | GND  | Hi                | Hi | Indeterminate                    | NA              |
| OPEN                | OPEN | Lo                | Lo | Switch remains at previous state | NA              |

|  |  |
|--|--|
| GND:   | +V - Vsupply (see switch drive specification table, this page) |
| OPEN*  | +V to +V - 1.5 volts   |
| Hi   | 3.0 V to 12.0 V  |
| Lo   | 0.0 V to 1.0 V   |
| Warning drive level below -0.25 V will damage TTL drive circuit!   |  |
| * WARNING! Use adapter cable 11764-60011 with 87130A switch driver |  |
| WARNING! Minimum switch spacing 6.0 mm (0.25 inch)                 |  |


- Option 115: Operating life: 5 million cycles minimum, except 1 million cycles minimum when driven at voltages 18-20 VDC.
- Option 124: Operating life: Operating life: 5 million cycles minimum, except 1 million cycles minimum when driven at voltages 28-32 VDC.

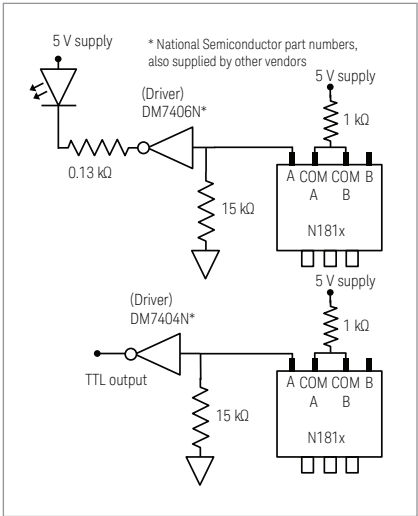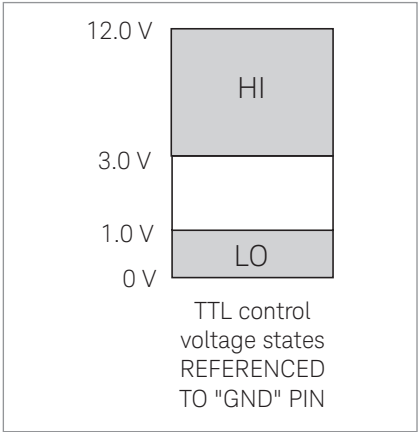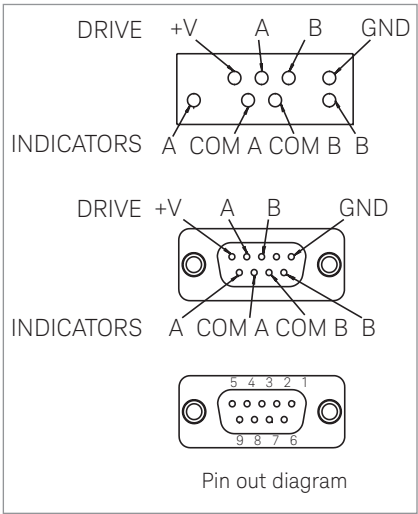


Recommended indicator circuit

Note: For option 402 (position indicator): To achieve maximum system stability, it is recommended to do a pre-cycling of minimum 100 cycles if the switch has been in storage or idling for an extended period of time.

N1811TL

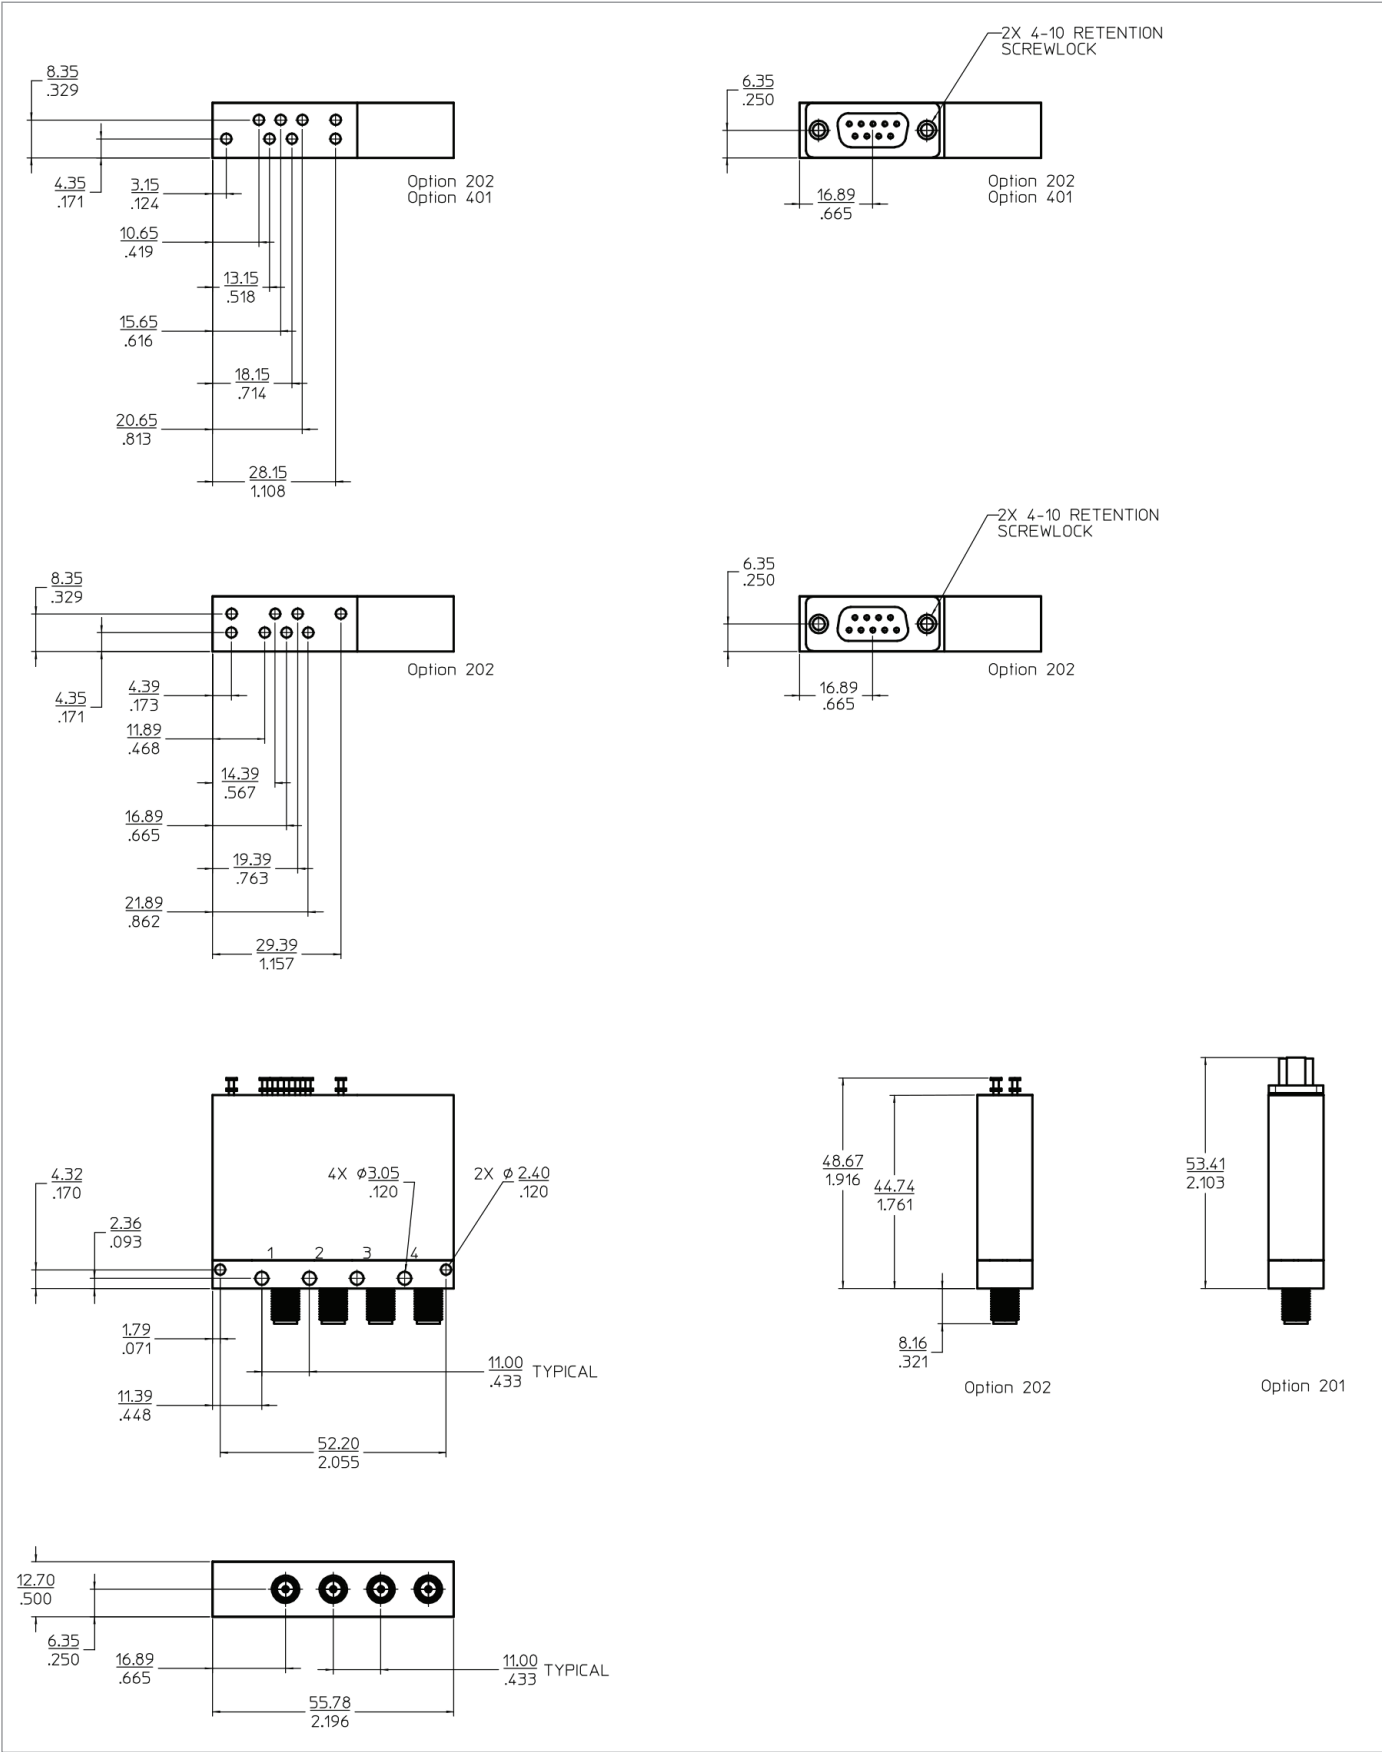

N1811TL



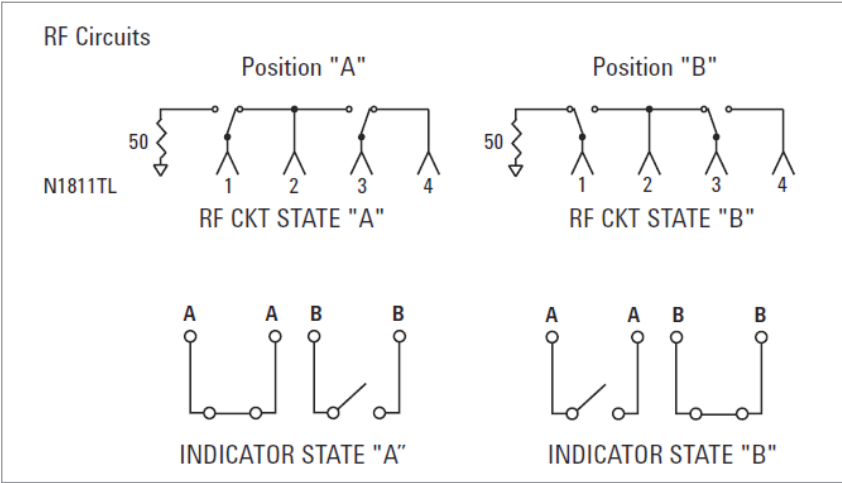


| Switch drive specifications N1810TL, N1811TL, N1812UL |                |                       |      |         |      |       |
|---|----------------|-----------------------|------|---------|------|-------|
| Option  | Parameter      | Conditions            | Min  | Nominal | Max  | Units |
| 105   | Supply voltage |                       | 4.5  | 5       | 7.0  | V     |
|   | Supply current | Supply voltage = 5 V  |      | 600     |      | mA    |
| 115 <sup>1</sup>                                      | Supply voltage |                       | 12.0 | 15      | 20.0 | V     |
|   | Supply current | Supply voltage = 15 V |      | 250     |      | mA    |
| 124 <sup>2</sup>                                      | Supply voltage |                       | 20.0 | 24      | 32.0 | V     |
|   | Supply current | Supply voltage = 24 V |      | 150     |      | mA    |

| TTL Drive specifications |                   |                        |     |         |      |       |
|--------------------------|-------------------|------------------------|-----|---------|------|-------|
| Option                   | Parameter         | Conditions             | Min | Nominal | Max  | Units |
| 401                      | High level input  |                        | 3.0 |         | 12.0 | V     |
|                          | Low level input   |                        | 0.0 |         | 1.0  | V     |
|                          | Max input current | Input voltage = 12.0 V |     |         | 1.0  | mA    |
|                          |                   | Input voltage = 3.85 V |     | 0.25    | 0.5  | mA    |

| Driving the switch*  |      |                   |    |                                  |                 |
|--|------|-------------------|----|----------------------------------|-----------------|
| STD drive connect  |      | TTL drive connect |    | RF state                         | INDICATOR state |
| GND to ground  |      | GND to ground     |    |                                  |                 |
| A  | B    | A                 | B  |                                  |                 |
| GND  | OPEN | Hi                | Lo | "A"                              | "A"             |
| OPEN   | GND  | Lo                | Hi | "B"                              | "B"             |
| GND  | GND  | Hi                | Hi | Indeterminate                    | NA              |
| OPEN   | OPEN | Lo                | Lo | Switch remains at previous state | NA              |
| GND: +V - Vsupply (see switch drive specification table, this page)                |      |                   |    |                                  |                 |
| OPEN*: +V to +V - 1.5 volts  |      |                   |    |                                  |                 |
| Hi 3.0 V to 12.0 V   |      |                   |    |                                  |                 |
| Lo 0.0 V to 1.0 V Warning drive level below -0.25 V will damage TTL drive circuit! |      |                   |    |                                  |                 |
| * WARNING! Use adapter cable 11764-60011 with 87130A switch driver                 |      |                   |    |                                  |                 |
| WARNING! Minimum switch spacing 6.0 mm (0.25 inch)                                 |      |                   |    |                                  |                 |


- Option 115: Operating life: 5 million cycles minimum, except 1 million cycles minimum when driven at voltages 18-20 VDC.
- Option 124: Operating life: 5 million cycles minimum, except 1 million cycles minimum when driven at voltages 28-32 VDC.

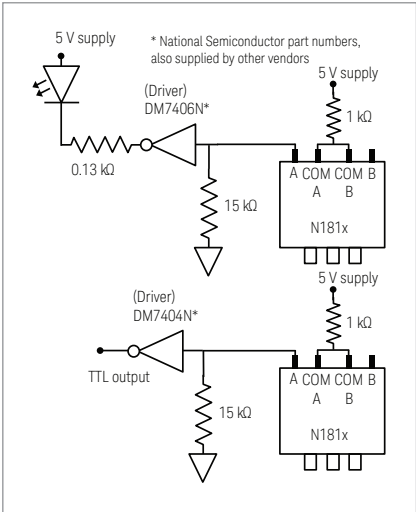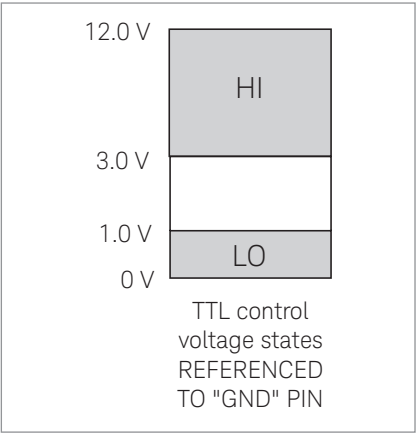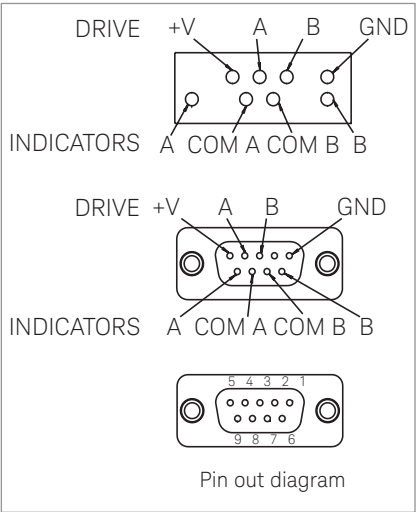


Recommended indicator circuit

Note: For option 402 (position indicator): To achieve maximum system stability, it is recommended to do a pre-cycling of minimum 100 cycles if the switch has been in storage or idling for an extended period of time.

N1812UL

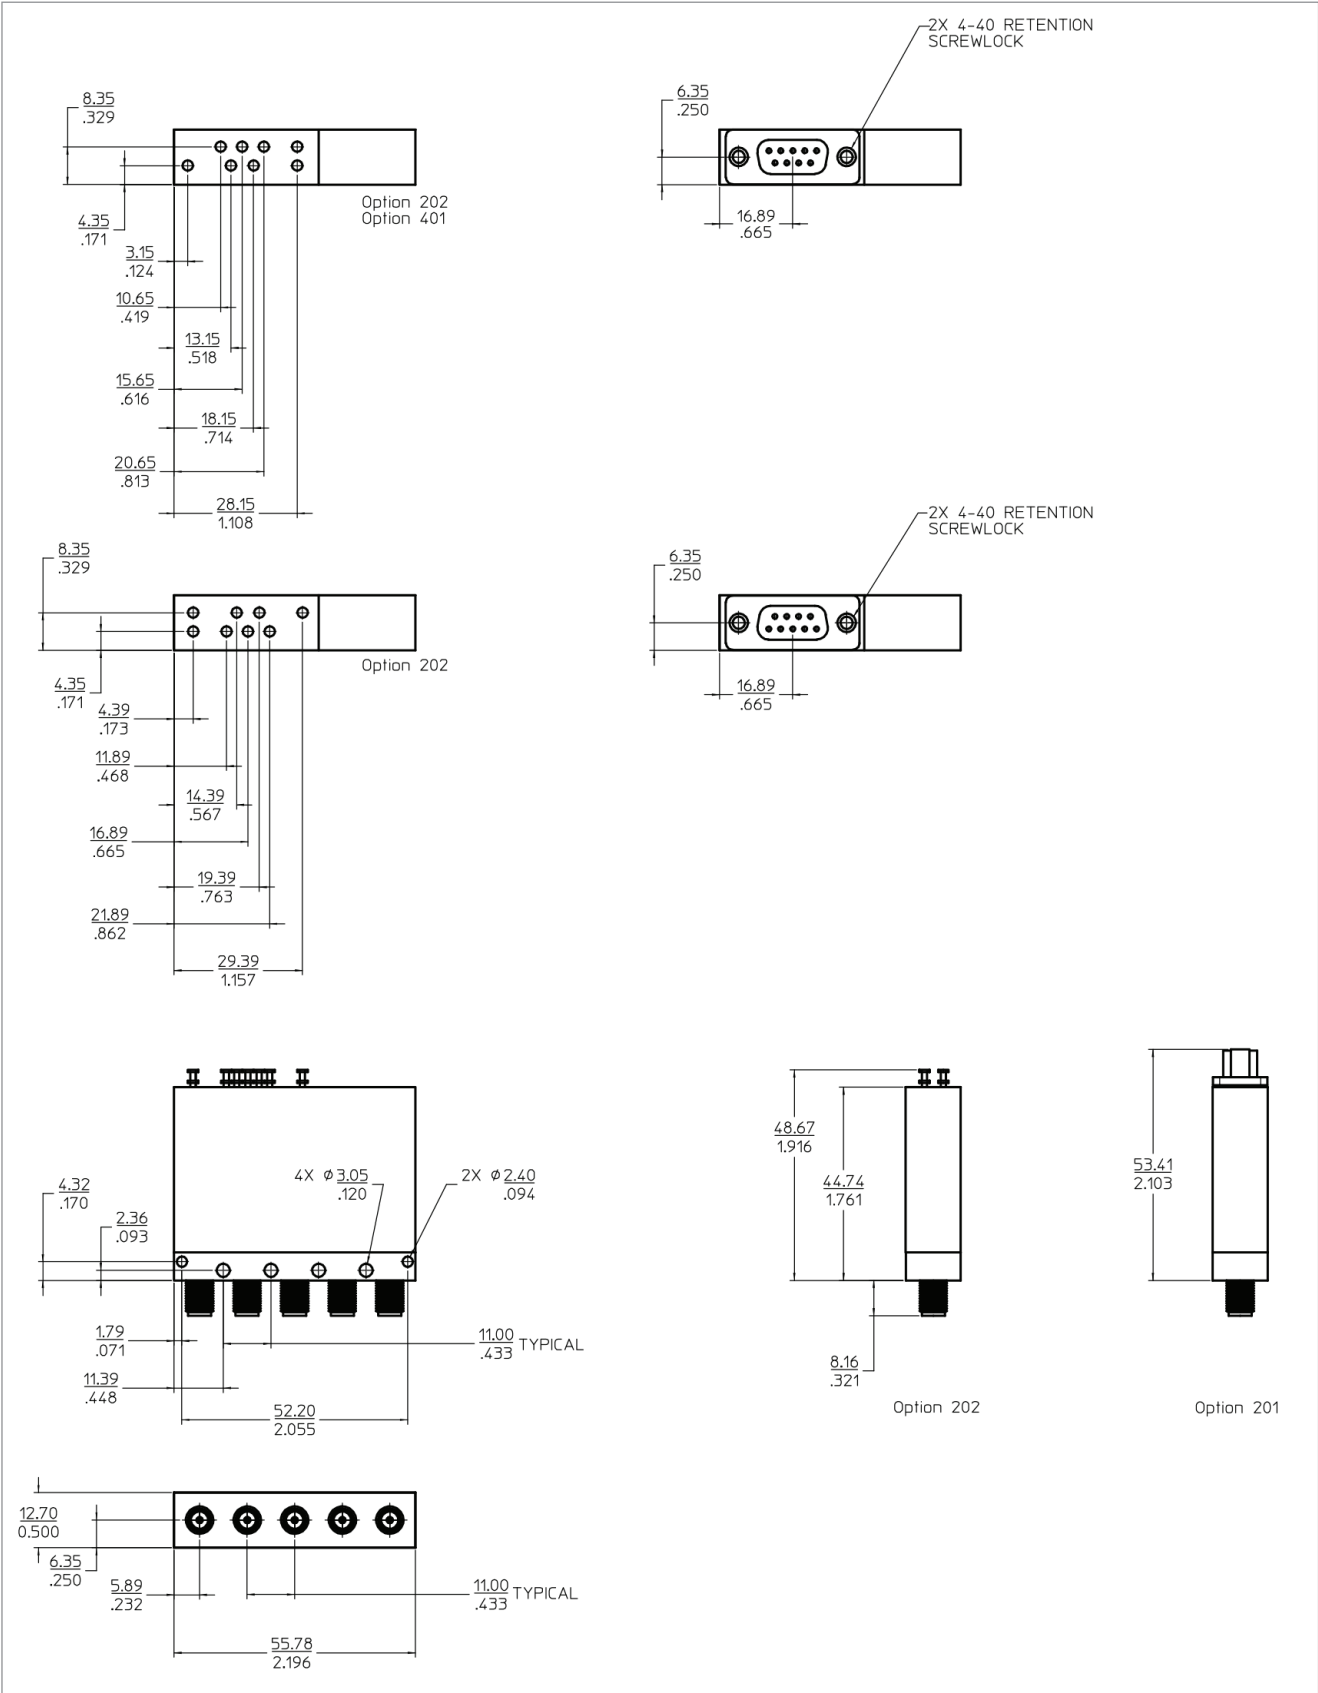




N1812UL

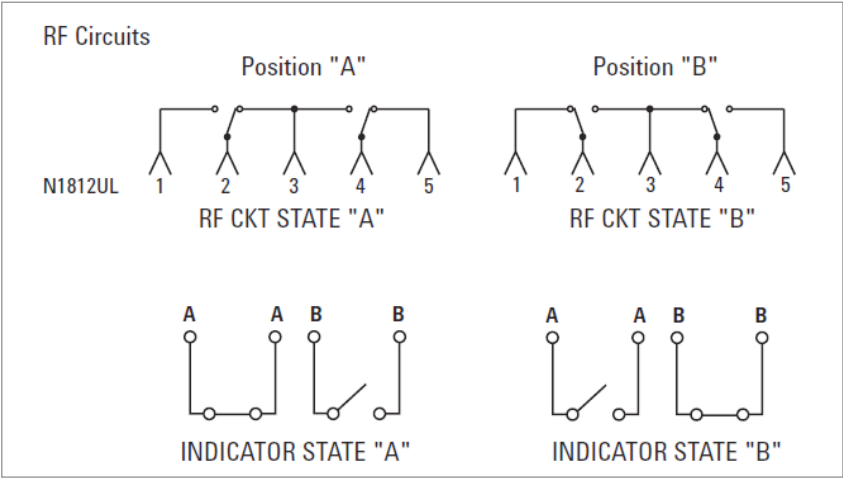

| Switch drive specifications N1810TL, N1811TL, N1812UL |                   |                        |      |         |      |       |
|---|-------------------|------------------------|------|---------|------|-------|
| Option  | Parameter         | Conditions             | Min  | Nominal | Max  | Units |
| 105   | Supply voltage    |                        | 4.5  | 5       | 7.0  | V     |
|   | Supply current    | Supply voltage = 5 V   |      | 600     |      | mA    |
| 115 <sup>1</sup>                                      | Supply voltage    |                        | 12.0 | 15      | 20.0 | V     |
|   | Supply current    | Supply voltage = 15 V  |      | 250     |      | mA    |
| 124 <sup>2</sup>                                      | Supply voltage    |                        | 20.0 | 24      | 32.0 | V     |
|   | Supply current    | Supply voltage = 24 V  |      | 150     |      | mA    |
| TTL drive specifications                              |                   |                        |      |         |      |       |
| Option  | Parameter         | Conditions             | Min  | Nominal | Max  | Units |
| 401   | High level input  |                        | 3.0  |         | 12.0 | V     |
|   | Low level input   |                        | 0.0  |         | 1.0  | V     |
|   | Max input current | Input voltage = 12.0 V |      |         | 1.0  | mA    |
|   |                   | Input voltage = 3.85 V |      | 0.25    | 0.5  | mA    |

| Driving the switch*  |   |                   |    |                                  |                 |
|--|---|-------------------|----|----------------------------------|-----------------|
| STD drive connect  |   | TTL drive connect |    | RF state                         | INDICATOR state |
| GND to ground  |   | GND to ground     |    |                                  |                 |
| A  | B   | A                 | B  |                                  |                 |
| GND  | OPEN  | Hi                | Lo | “A”                              | “A”             |
| OPEN   | GND   | Lo                | Hi | “B”                              | “B”             |
| GND  | GND   | Hi                | Hi | Indeterminate                    | NA              |
| OPEN   | OPEN  | Lo                | Lo | Switch remains at previous state | NA              |
| GND:   | +V - Vsupply (see switch drive specification table, this page)                  |                   |    |                                  |                 |
| OPEN*  | +V to +V - 1.5 volts  |                   |    |                                  |                 |
| Hi   | 3.0 V to 12.0 V   |                   |    |                                  |                 |
| Lo   | 0.0 V to 1.0 V Warning drive level below –0.25 V will damage TTL drive circuit! |                   |    |                                  |                 |
| * WARNING! Use adapter cable 11764-60011 with 87130A switch driver |   |                   |    |                                  |                 |
| WARNING! Minimum switch spacing 6.0 mm (0.25 inch)                 |   |                   |    |                                  |                 |

1. Option 115: Operating life: 5 million cycles minimum, except 1 million cycles minimum when driven at voltages 18-20 VDC.
2. Option 124: Operating life: 5 million cycles minimum, except 1 million cycles minimum when driven at voltages 28-32 VDC.

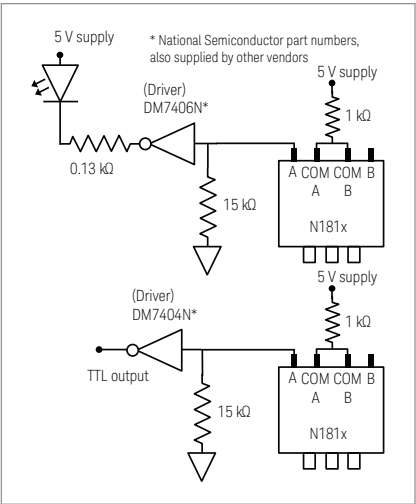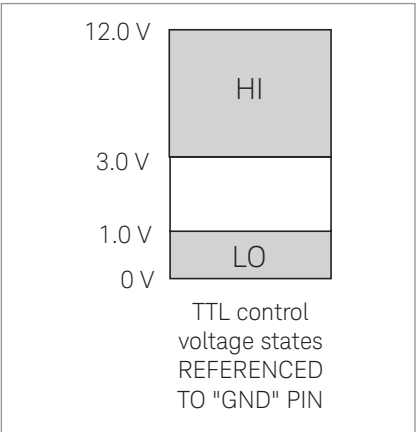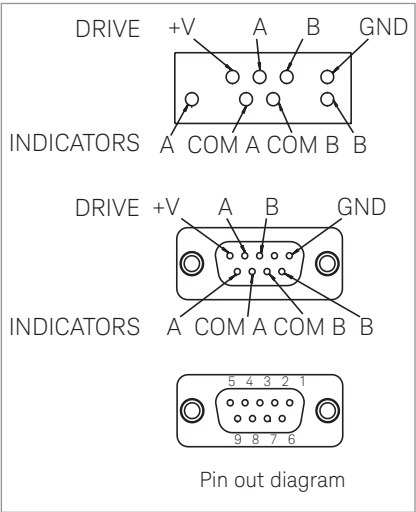



Recommended indicator circuit

Note: For option 402 (position indicator): To achieve maximum system stability, it is recommended to do a pre-cycling of minimum 100 cycles if the switch has been in storage or idling for an extended period of time.

## Supplemental Characteristics

### General operating characteristics – N181x series

| Switching speed | Repeatability     | Life <sup>1,2</sup> | Impedance |
|-----------------|-------------------|---------------------|-----------|
| < 15 ms         | 0.03 dB at 40 GHz | > 5 million cycles  | 50 Ω      |
|                 | 0.05 dB at 50 GHz |                     |           |
|                 | 0.08 dB at 67 GHz |                     |           |

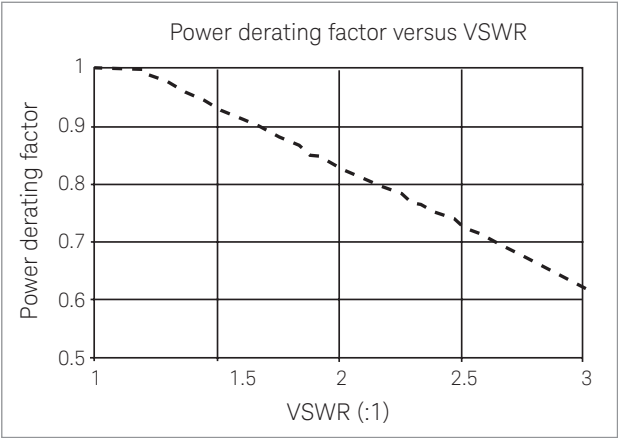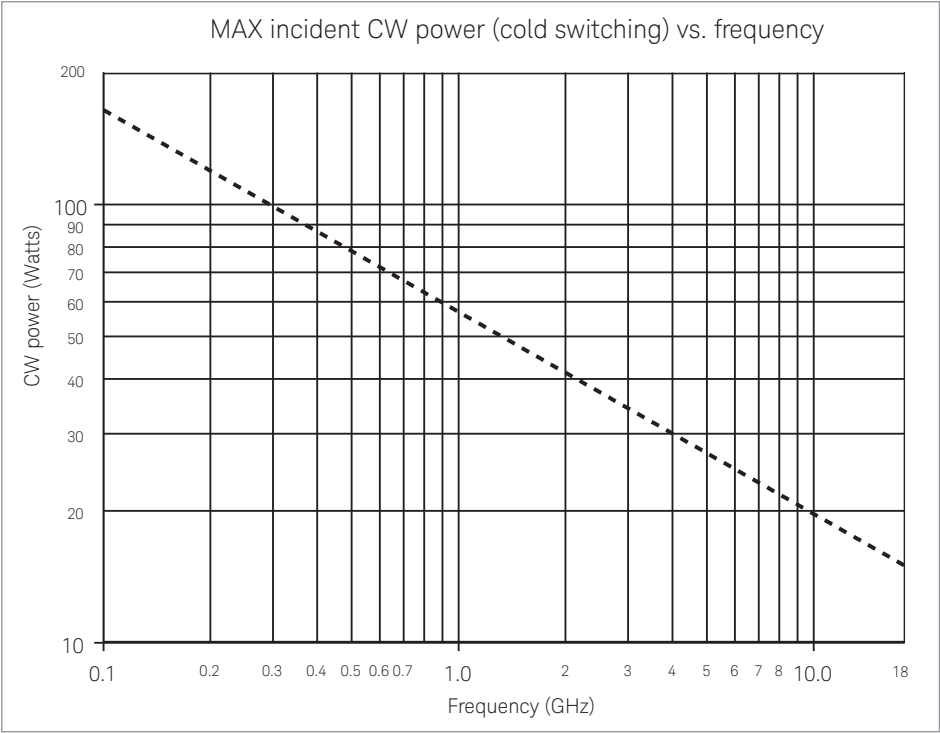

#### Reference conditions

- Cold switching only (NO hot switching)
- Ambient temperature of 75 °C or less<sup>3</sup>
- Sea level (0.88 derating at 15,000 ft.)
- Load VSWR < 1.2  
(see graph for derating above 1.2 VSWR)

1. Option 115: Operating life: 5 million cycles minimum, except 1 million cycles minimum when driven at voltages 18-20 VDC.  
2. Option 124: Operating life: 1 million cycles minimum.

## Environmental

The switch is designed to fully comply with Keysight Technologies' product operating environment specifications. The following summarizes the environmental specifications for these products (Class B1).

### Temperature<sup>1</sup>

|            |   |
|------------|---|
| Operating: | –25 to +75 °C   |
| Storage:   | –55 to +85 °C   |
| Cycling:   | –55 to +85 °C, 10 cycles per MIL-STD 202F, 170D, Condition A (modified) |

### Vibration

|            |  |
|------------|--|
| Operating: | 7 g, 5-2000 Hz at 0.25 in. p-p                               |
| Survival:  | 20 g, 20-2000 Hz at 0.06 in. p-p, 4 min/cycle, 4 cycles/axis |
| Random:    | 2.41 g (rms.) 10 min/axis                                    |
| Shock:     | Half sine: 500 g at 0.5 ms, 3 drops/direction, 18 total      |
| Operating: | 50 g at 6 ms, 6 directions                                   |

### Humidity

|            |  |
|------------|--|
| Operating: | 15 to 95 % relative humidity                       |
| Storage:   | 65 °C, 95 % RH, 10 days, MIL-STD 202F, Method 106E |

### Altitude

|            |   |
|------------|---|
| Operating: | 15,000 feet/4.6 km  |
| Storage:   | 50,000 feet/15.3 km, MIL-STD 202F, Method 105C, Condition B |


| Troubleshoot guide                     |  |                          |            |  |
|--|--|--------------------------|------------|--|
| Probable cause                         | Test   | Allowable range          |            | Remedy   |
|  |  | Low value                | High value |  |
| Not connected to supply                |  | See drive specifications |            | Connect +V to power supply                             |
| Supply not turned on                   |  |                          |            | Turn on power supply                                   |
| Supply voltage less than minimum       | Measure voltage from control pin to +V           | See drive specifications |            |  |
| Supply current low                     | Measure current draw with drive pin selected     | See drive specifications |            | Increase drive voltage or reduce drive line resistance |
| OPEN state voltage too low             | Measure voltage from control pin to +V           | (+V-1.5) volts           |            | +V volts   |
| Select lines not at ground (STD DRIVE) | Measure voltage from drive select pin to ground  |                          |            | Eliminate ground loops and lead high resistance        |
| TTL "LOW" voltage too high             | Measure voltage from ground pin to TTL drive pin | See drive specifications |            | Connect ground pin to ground                           |
| TTL "LOW" voltage < 0.0 volts          | Measure voltage from ground pin to TTL drive pin | See drive specifications |            | Eliminate ground loops                                 |
| TTL GND pin not grounded               |  |                          |            | Connect GND pin to ground                              |
| Driving switch with 87130A             |  |                          |            | Use adapter cable 11764-60011                          |

1. Option 301: Storage and cycling temperature: –55 °C to +65 °C Operating temperature: –25 °C to +65 °C  
 Option 105: Operating temperature: –5 °C to +75 °C  
 Option 115: Operating temperature: –15 °C to +75 °C



## Ordering Information

- Required: Specify one model number, one frequency range, one coil voltage, and one DC connector type (must select one of each)
- Optional: Specify RF performance enhancements and drive options (may select any, all, or none)

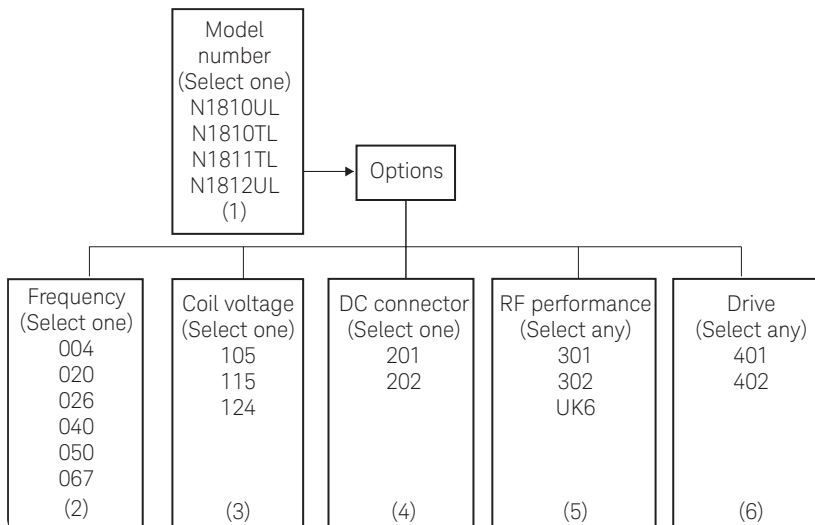

- Select a model to fit your application. (Required)  
N1810UL – Terminated latching 3-port  
N1810TL – Terminated latching 3-port  
N1811TL – Terminated latching 4-port  
N1812UL – Terminated latching 5-port
- Select a frequency range. (Required)  
004 – DC to 4 GHz  
020 – DC to 20 GHz  
026 – DC to 26.5 GHz  
040 – DC to 40 GHz  
050 – DC to 50 GHz  
067 – DC to 67 GHz
- Select a coil voltage level. (Required)  
105\* – 5 volts  
115 – 15 volts  
124 – 24 volts
- Select a DC connector type. (Required)  
201 – “D” subminiature 9 pin female  
202 – Solder lugs
- Select RF performance enhancements. (Optional)  
301 – Increased isolation  
302 – Reduced standing wave ratio and insertion loss  
UK6 – Calibration certificate with test data
- Select drive options. (Optional)  
401 – TTL/CMOS compatible 5 V drive  
402 – Position indicators

\* Includes options 402

## Ordering example

For an unterminated 5 port switch, operating up to 20 GHz, with 15 volt coils, D-sub connector, high isolation, and TTL, the order should look as follows: N1812UL Option 020 115 201 301 401.

Switch units beginning with the serial numbers listed below or higher have current interrupt built-in as a default.

- N1810UL-MY07244672
- N1810TL-MY07247927
- N1811TL-MY07244660
- N1812UL-MY07240668

## Related Literature

*Keysight Technologies Bench and System Switching Products*  
Literature Number 5989-9872EN

*Keysight RF and Microwave Switch Selection Guide*  
Literature Number 5989-6031EN

*Keysight 11713B/C Attenuator/Switch Drivers Configuration Guide*  
Literature Number 5989-7277EN


## Application Notes

*Power Handling Capability of Electromechanical Switches*  
Literature Number 5989-6032EN

*How Operating Life and Repeatability of Keysight's Electromechanical Switches Minimize System Uncertainty*  
Literature Number 5989-6085EN

## From Hewlett-Packard through Agilent to Keysight

For more than 75 years, we've been helping you unlock measurement insights. Our unique combination of hardware, software and people can help you reach your next breakthrough. **Unlocking measurement insights since 1939.**



## THE FUTURE

myKeysight

myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

### Three-Year Warranty

[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a full one-year warranty on many accessories, calibration devices, systems and custom products.

## Keysight Assurance Plans

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Infoline

[www.keysight.com/find/service](http://www.keysight.com/find/service)

Keysight Infoline

Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

## Keysight Channel Partners

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/switches](http://www.keysight.com/find/switches)

[www.keysight.com/find/mta](http://www.keysight.com/find/mta)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

## Americas

|               |                  |
|---------------|------------------|
| Canada        | (877) 894 4414   |
| Brazil        | 55 11 3351 7010  |
| Mexico        | 001 800 254 2440 |
| United States | (800) 829 4444   |

## Asia Pacific

|                    |                |
|--------------------|----------------|
| Australia          | 1 800 629 485  |
| China              | 800 810 0189   |
| Hong Kong          | 800 938 693    |
| India              | 1 800 11 2626  |
| Japan              | 0120 (421) 345 |
| Korea              | 080 769 0800   |
| Malaysia           | 1 800 888 848  |
| Singapore          | 1 800 375 8100 |
| Taiwan             | 0800 047 866   |
| Other AP Countries | (65) 6375 8100 |

## Europe &amp; Middle East

|                |               |
|----------------|---------------|
| Austria        | 0800 001122   |
| Belgium        | 0800 58580    |
| Finland        | 0800 523252   |
| France         | 0805 980333   |
| Germany        | 0800 6270999  |
| Ireland        | 1800 832700   |
| Israel         | 1 809 343051  |
| Italy          | 800 599100    |
| Luxembourg     | +32 800 58580 |
| Netherlands    | 0800 0233200  |
| Russia         | 8800 5009286  |
| Spain          | 800 000154    |
| Sweden         | 0200 882255   |
| Switzerland    | 0800 805353   |
|                | Opt. 1 (DE)   |
|                | Opt. 2 (FR)   |
|                | Opt. 3 (IT)   |
| United Kingdom | 0800 0260637  |

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
 (BP-02-10-16)

DEKRA Certified  
ISO9001 Quality Management System

[www.keysight.com/go/quality](http://www.keysight.com/go/quality)

Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2015  
Quality Management System



## Unlocking Measurement Insights

This information is subject to change without notice.  
© Keysight Technologies, 2013 - 2016  
Published in USA, March 22, 2016  
5968-9653E  
[www.keysight.com](http://www.keysight.com)

# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisanTG.com](mailto:sales@artisanTG.com) | [artisanTG.com](https://www.artisanTG.com)

