

Nemic-Lambda ICB165D  
**Power Supply Board**



© Artisan Technology Group

**\$350.00**

**In Stock**

**Qty Available: 1**

**Used and in Excellent Condition**

**Open Web Page**

<https://www.artisanng.com/97556-2>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

# Genesys™

**Programmable DC Power Supplies**

**750W /1500W in 1U**

**Built in RS-232 & RS-485 Interface**

**Parallel Current Summing**

**Optional Interfaces: USB**

**LXI Compliant LAN**

**IEEE488.2 SCPI Multi-Drop**

**Isolated Analog Interface**



## **Genesys™ Family**

**GEN H 750W Half Rack**

**GEN 1U 750/1500W Full Rack**

**GEN 2U 3.3/5kW**

**GEN 3U 10/15kW**

## **TDK-Lambda**

[www.us.tdk-lambda.com/hp](http://www.us.tdk-lambda.com/hp)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | [www.artisan-tg.com](http://www.artisan-tg.com)

*The Genesys™ family of programmable power supplies sets a new standard for flexible, reliable, AC/DC power systems in Test & Measurement, Industrial and Laboratory applications.*

## Features include:

- **High Power Density 750/1500W in 1U**
- **Wide Range Input (85 - 265Vac Continuous, single phase, 47/63Hz)**
- **Active Power Factor Correction (0.99 typical)**
- **Output Voltage up to 600V, Current up to 200A**
- **Built-in RS-232/RS-485 Interface**
- **Last Setting Memory; Front Panel Lockout**
- **Advanced Parallel reports total current up to four identical units**
- **Global Commands for Serial RS-232/RS-485 Interface**
- Reliable Encoders for Voltage and Current Adjustment
- Constant Voltage/Constant Current auto-crossover
- Parallel Operation with Active Current Sharing
- Independent Remote ON/OFF and Remote Enable/Disable
- External Analog Programming and Monitoring
- Reliable Modular and SMT Design
- 19" Rack Mounted ATE and OEM applications
- Optional Interfaces
  - Isolated Analog Programming and Monitoring
  - IEEE Multi-Drop - SCPI
  - LXI** Compliant LAN Interface
  - USB Interface
- Five Year Warranty
- Optional Isolated Analog Programming and Monitoring
- Optional IEEE 488.2 SCPI (GPIB) Interface

Worldwide Safety Agency Approvals; CE Mark for LVD and EMC Regulation



## Applications

Genesys™ power supplies are designed for demanding applications. Common controls are shared across all platforms.

### Test and Measurement

Last-Setting memory simplifies test design and requires no battery backup.

Built-in RS-232/RS-485 gives maximum system flexibility along with 0-5V and 0-10V, selectable analog programming.

Wide range of available outputs allows testing of many different devices.

### Semiconductor Processing

Equipment designers appreciate the wide range Input (85-265Vac) and numerous Outputs from which to select depending on application. Selectable Safe and Auto Re-start protects loads and process integrity.

Typical applications include Magnets, Filaments and Heaters.

### Aerospace and Satellite Testing

Complex systems use the complete Genesys™ Family: 1U 750W Half Rack, 1U 750W or 1500W Full-Rack, 2U 3.3kW and 3U 10/15kW. All are identical in Front Panel, Rear Panel Analog and Digital Interface Commands. A wide variety of outputs allows testing of many different devices.

### Laser Diode

OVP is directly set on Voltage Display, assuring accurate protection settings.

Current Limit Fold Back assures load is protected from current surges.

### Heater Supplies

Smooth, reliable encoders with selectable Fine and Coarse adjustment enhance Front Panel Control.

Remote Analog Programming is user selectable 0-5V or 0-10V and optional Isolated Programming/Monitoring Interfaces are also available.

### RF Amplifiers and Magnets

Robust design assures stable operation under a wide variety of loads.

High linearity in voltage and current mode.

## Front Panel Description



1. AC ON/OFF Switch
2. Air Intake allows zero stacking for maximum system flexibility and power density.
3. Reliable encoder controls Output Voltage and sets Address.
4. Volt Display shows Output Voltage and directly displays OVP, UVL and Address settings.
5. Reliable encoder controls Output Current, sets baudrate, and Advanced Parallel Mode
6. Current Display shows Output Current and displays baudrate.
7. Function/Status LEDs:
  - Alarm
  - Fine Control
  - Preview Settings
  - Foldback Mode
  - Remote Mode
  - Output On
8. Pushbuttons allow flexible user configuration
  - Coarse and fine Adjustment of Output Voltage/Current and Advanced Parallel Master or Slave select.
  - Preview settings and set Voltage/Current with Output OFF
  - Set OVP and UVL Limits
  - Set Current Foldback
  - Local/Remote Mode and select Address and Baudrate
  - Output ON/OFF and Auto-Start/Safe-Start Mode

## Rear Panel Description



1. Remote/Local Output Voltage Sense Connections.
2. DIP Switches select 0-5V or 0-10V Programming and other functions.
3. DB25 (Female) connector allows (Non-isolated) Analog Program and Monitor and other functions.
4. RS-485 OUT to other Genesys™ Power Supplies.
5. RS-232/RS-485 IN Remote Serial Programming.
6. Output Connections: Rugged busbars for up to 60V Output; Terminal block for Outputs >60V.
7. Exit air assures reliable operation when zero stacked.
8. Wide-Range Input 85-265VAC continuous, 47/63Hz with Active Power Factor Correction (0.99 typical)  
AC Input Connector: 750W (IEC320), 1500W (screw terminal-shown).
9. Optional Interface Position for IEEE488.2 SCPI (shown), Isolated Analog Interface, LAN Interface or USB Interface.

LAN Interface complies with **LXI** Class C Specification

**TDK-Lambda** | 2

# Genesys™ 750W/1500W Specifications

| 1.0 MODEL                       | GEN | 6-200 | 8-180 | 12.5-120 | 20-76 | 30-50 | 40-38 | 50-30 | 60-25 | 80-19 | 100-15 | 150-10 | 300-5 | 600-2.6 | 750W | 1500W |
|---------------------------------|-----|-------|-------|----------|-------|-------|-------|-------|-------|-------|--------|--------|-------|---------|------|-------|
| 1.Rated output voltage(*1)      | V   | 6     | 8     | 12.5     | 20    | 30    | 40    | 50    | 60    | 80    | 100    | 150    | 300   | 600     |      | X     |
| 2.Rated Output Current(*2)      | A   | 200   | 180   | 120      | 76    | 50    | 38    | 30    | 25    | 19    | 15     | 10     | 5     | 2.6     |      | X     |
| 3.Rated Output Power            | W   | 1200  | 1440  | 1500     | 1520  | 1500  | 1520  | 1500  | 1500  | 1520  | 1500   | 1500   | 1500  | 1560    |      | X     |
| 4.Efficiency at 100/200Vac (*3) | %   | 77/80 | 78/81 | 81/84    | 83/86 | 83/86 | 84/88 | 84/88 | 84/88 | 84/88 | 84/88  | 84/88  | 83/87 | 83/87   | X    | X     |

| 1.0 MODEL                   | GEN | 6-100 | 8-90 | 12.5-60 | 20-38 | 30-25 | 40-19 | --- | 60-12.5 | 80-9.5 | 100-7.5 | 150-5 | 300-2.5 | 600-1.3 | X |  |
|-----------------------------|-----|-------|------|---------|-------|-------|-------|-----|---------|--------|---------|-------|---------|---------|---|--|
| 1.Rated output voltage (*1) | V   | 6     | 8    | 12.5    | 20    | 30    | 40    | --- | 60      | 80     | 100     | 150   | 300     | 600     | X |  |
| 2.Rated Output Current (*2) | A   | 100   | 90   | 60      | 38    | 25    | 19    | --- | 12.5    | 9.5    | 7.5     | 5     | 2.5     | 1.3     | X |  |
| 3.Rated Output Power        | W   | 600   | 720  | 750     | 760   | 750   | 760   | --- | 750     | 760    | 750     | 750   | 750     | 780     | X |  |

## 1.1 CONSTANT VOLTAGE MODE

|                                                |        |                                                                                  |     |     |     |                                  |      |      |     |      |      |      |      |      |   |   |
|------------------------------------------------|--------|----------------------------------------------------------------------------------|-----|-----|-----|----------------------------------|------|------|-----|------|------|------|------|------|---|---|
| 1.Max.line regulation ( 0.01% of Vo+ 2mV )(*4) | mV     | 2.6                                                                              | 2.8 | 3.3 | 4   | 5                                | 6    | 7    | 8   | 10   | 12   | 17   | 32   | 62   | X | X |
| 2.Max load regulation ( 0.01% of Vo+2mV )(*5)  | mV     | 2.6                                                                              | 2.8 | 3.3 | 4   | 5                                | 6    | 7    | 8   | 10   | 12   | 17   | 32   | 62   | X | X |
| 3.Ripple and noise p-p 20MHz                   | mV     | 60                                                                               | 60  | 60  | 60  | 60                               | 60   | 60   | 60  | 80   | 80   | 100  | 120  | 300  | X | X |
| 4.Ripple r.m.s 5Hz~1MHz                        | mV     | 8                                                                                | 8   | 8   | 8   | 8                                | 8    | 8    | 8   | 8    | 8    | 10   | 20   | 60   | X | X |
| 5.Remote sense compensation/line               | V      | 1                                                                                | 1   | 1   | 1   | 1.5                              | 2    | 2    | 3   | 4    | 5    | 5    | 5    | 5    | X | X |
| 6.Temp. coefficient                            | PPM/°C | 100PPM/°C of rated output voltage, following 30 minutes warm up                  |     |     |     |                                  |      |      |     |      |      |      |      |      | X | X |
| 7.Up-prog. response time, 0~Vo Rated           | mS     | 80mS , N.L/F.L , resistive load                                                  |     |     |     | 150mS , N.L/F.L , resistive load |      |      |     | 250  |      |      |      |      | X | X |
| 8.Down-prog response time full-load            | mS     | 10                                                                               |     |     |     | 80                               |      |      |     | 150  |      |      |      | 250  | X | X |
| 9.Down-prog response time no-load              | mS     | 500                                                                              | 600 | 700 | 800 | 900                              | 1000 | 1100 | 100 | 1200 | 1500 | 2000 | 2500 | 4000 | X | X |
| 10.Transient response time (*8)                |        | Less than 1mSec for models up to and including 100V. 2msec for models above 100V |     |     |     |                                  |      |      |     |      |      |      |      |      | X | X |

## 1.2 CONSTANT CURRENT MODE

|                                              |        |                                                                   |     |     |      |     |      |     |      |      |      |     |      |      |   |   |
|----------------------------------------------|--------|-------------------------------------------------------------------|-----|-----|------|-----|------|-----|------|------|------|-----|------|------|---|---|
| 1.Max.line regulation (0.01% of Io+ 2mA)(*4) | mA     | 12                                                                | 11  | 8.0 | 5.8  | 4.5 | 3.9  | --- | 3.25 | 2.95 | 2.75 | 2.5 | 2.25 | 2.13 | X |   |
| 2.Max.load regulation (0.02% of Io+5mA)(*6)  | mA     | 25                                                                | 23  | 17  | 12.6 | 10  | 8.8  | --- | 7.5  | 6.9  | 6.5  | 6.0 | 5.5  | 5.26 | X |   |
| 3.Ripple r.m.s 5Hz~1MHz . (*7)               | mA     | 200                                                               | 180 | 120 | 76   | 63  | 48   | --- | 38   | 29   | 23   | 18  | 13   | 8    | X |   |
| 4.Max.line regulation (0.01% of Io+ 2mA)(*4) | mA     | 22                                                                | 20  | 14  | 9.6  | 7.0 | 5.8  | 5   | 4.5  | 3.9  | 3.5  | 3.0 | 2.5  | 2.26 |   | X |
| 5.Max.load regulation (0.02% of Io+5mA)(*6)  | mA     | 45                                                                | 41  | 29  | 20.2 | 15  | 12.6 | 11  | 10   | 8.8  | 8.0  | 7.0 | 6.0  | 5.52 |   | X |
| 6.Ripple r.m.s 5Hz~1MHz .(*7)                | mA     | 400                                                               | 360 | 240 | 152  | 125 | 95   | 85  | 75   | 57   | 45   | 35  | 25   | 12   |   | X |
| 7.Temp. coefficient                          | PPM/°C | 100PPM/°C from rated output voltage, following 30 minutes warm up |     |     |      |     |      |     |      |      |      |     |      |      | X | X |

## 1.3 PROTECTIVE FUNCTIONS

|                          |                                                                                        |   |   |
|--------------------------|----------------------------------------------------------------------------------------|---|---|
| 1. OCP                   | 0~105% Constant Current                                                                | X | X |
| 2. OCP Foldback          | Output shut down when power supply change from CV to CC. User selectable.              | X | X |
| 3. OVP type              | Inverter shut-down, manual reset by AC input recycle or by OUT button                  | X | X |
| 4. OVP trip point        | 0.5~7.5V 0.5~10V 1~15V 1~24V 2~36V 2~44V 5~57V 5~66V 5~88V 5~110V 5~165V 5~330V 5~660V | X | X |
| 5. Over Temp. Protection | User selectable , latched or non latched                                               | X | X |

## 1.4 ANALOG PROGRAMMING AND MONITORING

|                               |                                                                                            |   |   |
|-------------------------------|--------------------------------------------------------------------------------------------|---|---|
| 1.Vout Voltage Programming    | 0~100%, 0~5V or 0~10V, user select. Accuracy and linearity: +/-0.5% of rated Vout.         | X | X |
| 2.Iout Voltage Programming    | 0~100%, 0~5V or 0~10V, user select. Accuracy and linearity: +/-1% of rated Iout.           | X | X |
| 3.Vout Resistor Programming   | 0~100%, 0~5/10Kohm full scale, user select. Accuracy and linearity: +/-1% of rated Vout.   | X | X |
| 4.Iout Resistor Programming   | 0~100%, 0~5/10Kohm full scale, user select. Accuracy and linearity: +/-1.5% of rated Iout. | X | X |
| 5.On/Off control (rear panel) | By electrical. Voltage: 0~0.6V/2~15V, or dry contact ,user selectable logic                | X | X |
| 6.Output Current monitor      | 0~5V or 0~10V , accuracy:1% , user selectable                                              | X | X |
| 7.Output Voltage monitor      | 0~5V or 0~10V , accuracy:1% , user selectable                                              | X | X |
| 8.Power Supply OK signal      | TTL High=OK, 0V-Fail 500ohm impedance                                                      | X | X |
| 9. CV/CC indicator            | CV: TTL high (4~5V) source: 10mA, CC: TTL low (0~0.4V):10mA                                | X | X |
| 10. Enable/Disable            | Dry contact. Open:off , Short: on. Max. voltage at Enable/Disable in: 6V                   | X | X |

## 1.5 FRONT PANEL

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |   |   |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|
| 1.Control functions | Vout/ Iout manual adjust by separate encoders (coarse and fine adjustment selectable)<br>OVP/UVL manual adjust by Volt. Adjust encoder<br>AC on/off, Output on/off, Re-start modes (auto, safe), Foldback control (CV to CC), Go to local control<br>Address selection by Voltage (or current) adjust encoder. Number of addresses:31<br>RS232/485 and IEEE488.2 selection by IEEE enable switch and DIP switch<br>Baudrate selection: 1200,2400,4800,9600 and 19,200 | X | X |
| 2.Display           | Voltage 4 digits , accuracy: 0.5%+/-1 count<br>Current 4 digits, accuracy: 0.5%+/-1 count                                                                                                                                                                                                                                                                                                                                                                             | X | X |
| 3.Indications       | Voltage, Current, Alarm, Fine, Preview, Foldback, Local, Output On                                                                                                                                                                                                                                                                                                                                                                                                    | X | X |

## 1.6 Interface RS232&RS485 or Optional GPIB Interface

| Model                                              | V  | 6    | 8    | 12.5 | 20   | 30   | 40   | 50 | 60  | 80  | 100 | 150 | 300 | 600 | 750W | 1500W |
|----------------------------------------------------|----|------|------|------|------|------|------|----|-----|-----|-----|-----|-----|-----|------|-------|
| 1. Remote Voltage Programming (16 bit)             |    |      |      |      |      |      |      |    |     |     |     |     |     |     |      |       |
| Resolution (0.012% of Vo Rated)                    | mV | 0.72 | 0.96 | 1.50 | 2.40 | 3.60 | 4.80 | 6  | 7.2 | 9.6 | 12  | 18  | 36  | 72  | X    | X     |
| Accuracy (0.05%Vo Rated+0.05% of Vo Actual Output) | mV | 6.0  | 8.0  | 12.5 | 20   | 30   | 40   | 50 | 60  | 80  | 100 | 150 | 300 | 600 | X    | X     |

|                                                      |    |     |      |      |      |     |      |      |      |      |      |      |      |      |   |   |
|------------------------------------------------------|----|-----|------|------|------|-----|------|------|------|------|------|------|------|------|---|---|
| 2. Remote Current Programming (16 bit)               |    |     |      |      |      |     |      |      |      |      |      |      |      |      |   |   |
| Resolution (0.012% of Io Rated)                      | mA | 12  | 10.8 | 7.2  | 4.56 | 3.0 | 2.28 | ---  | 1.50 | 1.14 | 0.90 | 0.60 | 0.30 | 0.16 | X |   |
| Accuracy (0.1% of Io Rated+0.1% of Io Actual Output) | mA | 200 | 180  | 120  | 76   | 50  | 38   | ---  | 25   | 19   | 15   | 10   | 5.0  | 2.6  | X |   |
| Resolution (0.012% of Io Rated)                      | mA | 24  | 21.6 | 14.4 | 9.12 | 6.0 | 4.56 | 3.60 | 3.0  | 2.28 | 1.80 | 1.20 | 0.60 | 0.32 |   | X |
| Accuracy (0.1% of Io Rated+0.1% of Io Actual Output) | mA | 400 | 360  | 240  | 152  | 100 | 76   | 60   | 50   | 38   | 30   | 20   | 10   | 5.2  |   | X |

|                                                  |    |      |      |      |      |      |      |     |     |     |     |     |     |      |   |   |
|--------------------------------------------------|----|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|------|---|---|
| 3. Readback Voltage                              |    |      |      |      |      |      |      |     |     |     |     |     |     |      |   |   |
| Resolution (0.012% of Vo Rated)                  | mV | 0.72 | 0.96 | 1.50 | 2.40 | 3.60 | 4.80 | 6.0 | 7.2 | 9.6 | 12  | 18  | 36  | 72   | X | X |
| Accuracy (0.1%Vo Rated+0.1% of Vo Actual Output) | mV | 12   | 16   | 25   | 40   | 60   | 80   | 100 | 120 | 160 | 200 | 300 | 600 | 1200 | X | X |

|                                                      |    |     |      |      |      |     |      |      |      |      |      |      |      |      |   |   |
|------------------------------------------------------|----|-----|------|------|------|-----|------|------|------|------|------|------|------|------|---|---|
| 4. Readback Current                                  |    |     |      |      |      |     |      |      |      |      |      |      |      |      |   |   |
| Resolution (0.012% of Io Rated )                     | mA | 12  | 10.8 | 7.2  | 4.56 | 3.0 | 2.28 | ---  | 1.50 | 1.14 | 0.90 | 0.60 | 0.30 | 0.16 | X |   |
| Accuracy (0.3% of Io Rated+0.1% of Io Actual Output) | mA | 400 | 360  | 240  | 152  | 100 | 76   | ---  | 50   | 38   | 30   | 20   | 10   | 5.2  | X |   |
| Resolution (0.012% of Io Rated )                     | mA | 24  | 21.6 | 14.4 | 9.12 | 6   | 4.56 | 3.60 | 3.0  | 2.28 | 1.80 | 1.20 | 0.60 | 0.32 |   | X |
| Accuracy (0.3% of Io Rated+0.1% of Io Actual Output) | mA | 800 | 720  | 480  | 304  | 200 | 152  | 120  | 100  | 76   | 60   | 40   | 20   | 10.4 |   | X |

|                               |    |    |    |     |     |     |     |     |     |     |      |      |      |      |   |   |
|-------------------------------|----|----|----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|---|---|
| 5. OVP/UVL Programming        |    |    |    |     |     |     |     |     |     |     |      |      |      |      |   |   |
| Resolution (0.1% of Vo Rated) | mV | 6  | 8  | 12  | 20  | 30  | 40  | 50  | 60  | 80  | 100  | 150  | 300  | 600  | X | X |
| Accuracy (1% of Vo Rated)     | mV | 60 | 80 | 125 | 200 | 300 | 400 | 500 | 600 | 800 | 1000 | 1500 | 3000 | 6000 | X | X |

\*1: Minimum voltage is guaranteed to maximum 0.2% of Vo Rated.

\*3: At maximum output power.

\*5: From No-load to Full-load, constant input voltage.

\*2: Minimum current is guaranteed to maximum 0.4% of Io Rated

\*4: 85~132Vac or 170~265Vac, constant load.

\*6: For load voltage change, equal to the unit voltage rating, constant input voltage.

\*7: For 6V models the ripple is measured at 2~6V output voltage and full output current. For other models, the ripple is measured at 10~100% output voltage and full output current.

\*8: Time for the output voltage to recover within 0.5% of its rated for a load change 10~90% of rated output , Output set-point:10~100%.

Accuracy -Values have been calculated at Vo Rated & Io Rated



General Specifications Genesys™ 750W/1500W

2.1 INPUT CHARACTERISTICS

|                              |                                                                            |
|------------------------------|----------------------------------------------------------------------------|
| 1. Input voltage/freq. (*1)  | 85~265Vac continuous, 47~63Hz, single phase                                |
| 2. Power Factor              | 0.99 @100/200Vac, rated output power.                                      |
| 3. EN61000-3-2,3 compliance  | Complies with EN61000-3-2 class A and EN61000-3-3 at 20~100% output power. |
| 4. Input current 100/200Vac  | <b>750W</b> :10.5A / 5A, <b>1500W</b> :21A / 11A                           |
| 5. Inrush current 100/200Vac | <b>750W</b> :Less than 25A, <b>1500W</b> :Less than 50A                    |
| 6. Hold-up time              | More than 20mS , 100Vac , at 100% load.                                    |

2.2 POWER SUPPLY CONFIGURATION

|                       |                                                                                                |
|-----------------------|------------------------------------------------------------------------------------------------|
| 1. Parallel Operation | Up to 4 identical units in master/slave mode with parallel current summing (Advanced Parallel) |
| 2. Series Operation   | Up to 2 units. with external diodes. 600V Max to Chassis ground                                |

2.3 ENVIRONMENTAL CONDITIONS

|                       |                                                                                         |
|-----------------------|-----------------------------------------------------------------------------------------|
| 1. Operating temp     | 0~50 °C, 100% load.                                                                     |
| 2. Storage temp       | -20~70 °C                                                                               |
| 3. Operating humidity | 30~90% RH (non-condensing).                                                             |
| 4. Storage humidity   | 10~95% RH (non-condensing).                                                             |
| 5. Vibration          | MIL-810E, method 514.4 , test cond. I-3.3.1. The EUT is fixed to the vibrating surface. |
| 6. Shock              | Less than 20G , half sine , 11mSec. Unit is unpacked.                                   |
| 7. Altitude           | Operating: 10000ft (3000m) , Non operating: 40000ft (12000m).                           |

2.4 EMC

|                         |                                                   |
|-------------------------|---------------------------------------------------|
| 1.Applicable Standards: |                                                   |
| 2.ESD                   | IEC1000-4-2. Air-disch.-8KV, contact disch.-4KV   |
| 3.Fast transients       | IEC1000-4-4. 2KV                                  |
| 4.Surge immunity        | IEC1000-4-5. 1KV line to line, 2KV line to ground |
| 5.Conducted immunity    | IEC1000-4-6, 3V                                   |
| 6.Radiated immunity     | IEC1000-4-3, 3V/m                                 |
| 7.Conducted emission    | EN55022B,FCC part 15J-B,VCCI-2                    |
| 8.Radiated emission     | EN55022A,FCC part 15-A,VCCI-1                     |
| 9.Voltage dips          | EN61000-4-11                                      |
| 10. Conducted emission  | EN55022B, FCC part 15-B, VCCI-2.                  |
| 11. Radiated emission   | EN55022A, FCC part 15-A, VCCI-1.                  |

2.5 SAFETY

|                         |                                                                                                                                                                                                                                                                                      |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.Applicable standards: | <b>CE Mark, UL60950,EN60950 listed.</b> Vout<60V:Output is SELV , IEEE/Isolated analog are SELV.<br>60<Vout<400V: Output is hazardous, IEEE/Isolated analog are SELV.<br>400<Vout<600V:Output is hazardous, IEEE/Isolated analog are not SELV.                                       |
| 2.Withstand voltage     | Vout<60V models :Input-Outputs (SELV): 3.0KVrms 1min, Input-Ground: 2.0KVrms 1min.<br>60<Vout<600V models: Input-Haz. Output: 2.5KVrms 1min, Input-SELV: 3KVrms 1min.<br>Hazardous Output.-SELV: 1.9KVrms 1min, Hazardous Output-Ground:1.9KVrms 1min.<br>Input-Ground: 2KVrms 1min. |
| 3.Insulation resistance | More than 100Mohm at 25 °C , 70% RH, 500Vdc                                                                                                                                                                                                                                          |

2.6 MECHANICAL CONSTRUCTION


|                       |                                                                                                                    |
|-----------------------|--------------------------------------------------------------------------------------------------------------------|
| 1. Cooling            | Forced air flow: from front to rear. No ventilation holes at the top or bottom of the chassis; Variable fan speed. |
| 2. Dimensions (WxHxD) | W: 16.64in, H: 1.72in, D: 17.04in (excluding connectors, encoders, handles, etc.)                                  |
| 3. Weight             | <b>750W</b> : 7Kg (15 Lbs) <b>1500W</b> : 8.5Kg (18 Lbs)                                                           |
| 4. AC Input connector | 750W: IEC320 AC Inlet.<br>1500W: Screw terminal block, Phoenix P/N: FRONT-4-H-7.62 , with strain relief            |
| 5.Output connectors   | 6V to 60V models: Bus-bars (hole Ø 8.5mm). 80V to 600V models: Terminal block, Phoenix P/N: FRONT-4-H-7.62         |

2.7 RELIABILITY SPECS

|             |          |
|-------------|----------|
| 1. Warranty | 5 years. |
|-------------|----------|

\*1: For cases where conformance to various safety standards (UL, IEC etc.) is required, to be described as 100-240Vac (50/60Hz).

Outline Drawing Genesys™ 750W/1500W Units

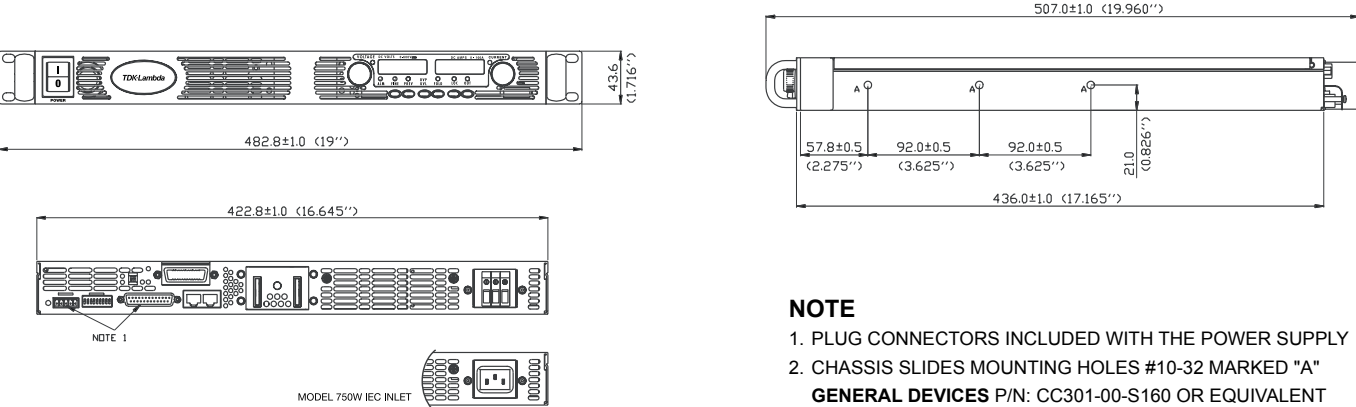


# Genesys™ Power Parallel and Series Configurations

## Parallel operation - Master/Slave:

Active current sharing allows up to four identical units to be connected in an auto-parallel configuration for four times the output power.

In Advanced Parallel Master/Slave Mode, total current is programmed and reported by the Master. Up to four supplies act as one.



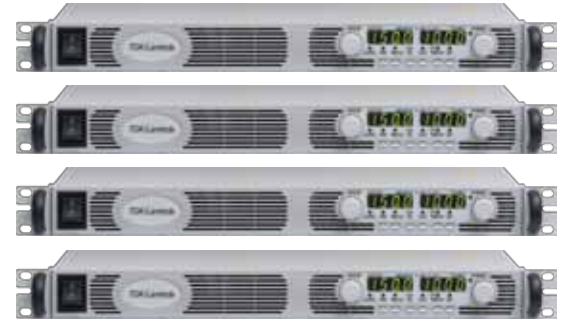


## Series operation

Up to two units may be connected in series to increase the output voltage or to provide bipolar output. (Max 600V to Chassis Ground).

## Remote Programming via RS-232 & RS-485 Interface

Standard Serial Interface allows daisy-chain control of up to 31 power supplies on the same communication bus with built-in RS-232 & RS-485 Interface with or without Multi-Drop option.

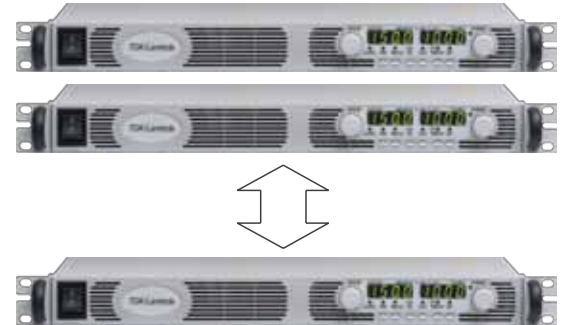

## Programming Options (Factory installed)

### New IEEE Multi-Drop Interface

P/N: IEMD

- Allows IEEE Master to control up to 30 (Multi-Drop equipped) slaves over RS-485 daisy-chain
- Only the Master needs be equipped with IEEE Interface
- IEEE 488.2 SCPI Compliant
- Program Voltage
- Measure Voltage
- Over Voltage setting and shutdown
- Error and Status Messages
- Program Current
- Measure Current
- Current Foldback shutdown

### New Multi-Drop Slave Option

P/N: MD

- Slaves need to be equipped with the MD Slave (RS-485) option

### Isolated Analog Programming

P/N: IS510

- Four Channels to Program and Monitor Voltage and Current.
- Isolation allows operation with floating references in harsh electrical environments.
- Choose between programming with Voltage or Current.
- Connection via removable terminal block: Phoenix MC1,5/8-ST-3.81.
- Voltage Programming, user-selectable 0-5V or 0-10V signal.
  - Power supply Voltage and Current Programming Accuracy  $\pm 1\%$
  - Power supply Voltage and Current Monitoring Accuracy  $\pm 1.5\%$
- Current Programming with 4-20mA signal.
  - Power supply Voltage and Current Programming Accuracy  $\pm 1\%$
  - Power supply Voltage and Current Monitoring Accuracy  $\pm 1.5\%$

P/N: IS420

### LAN Interface

### LXI Compliant to Class C

P/N: LAN

- Meets all LXI-C Requirements
- Address Viewable on Front Panel
- Fixed and Dynamic Addressing
- Fast Startup
- VISA & SCPI Compatible
- LAN Fault Indicators
- Auto-detects LAN Cross-over Cable
- Compatible with most standard Networks

### USB Interface

P/N: USB

- Allows Serial Connection to USB Port on computer
- Serial commands same as (standard) RS-232/RS-485 Interface

# Power Supply Identification / Accessories

## How to order

| <b>GEN</b>  | <b>600</b>              | - | <b>2.6</b>              | -                                                                     | -                                                                                                       |
|-------------|-------------------------|---|-------------------------|-----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Series Name | Output Voltage (0~600V) |   | Output Current (0~2.6A) | Factory Options<br>Option: IEMD<br>MD<br>IS510<br>IS420<br>LAN<br>USB | AC Cable option is 750W only<br>Region: E - Europe<br>J - Japan<br>I - Middle East<br>U - North America |

### Models 750/1500W

| Model       | Output Voltage VDC | Output Current (A) | Output Power (W) |
|-------------|--------------------|--------------------|------------------|
| GEN6-100    | 0~6V               | 0~100              | 600              |
| GEN6-200    |                    | 0~200              | 1200             |
| GEN8-90     |                    | 0~90               | 720              |
| GEN8-180    | 0~8V               | 0~180              | 1440             |
| GEN12.5-60  |                    | 0~60               | 750              |
| GEN12.5-120 | 0~12.5V            | 0~120              | 1500             |
| GEN20-38    |                    | 0~38               | 760              |
| GEN20-76    | 0~20V              | 0~76               | 1520             |
| GEN30-25    |                    | 0~25               | 750              |
| GEN30-50    | 0~30V              | 0~50               | 1500             |
| GEN40-19    |                    | 0~19               | 760              |
| GEN40-38    | 0~40V              | 0~38               | 1520             |

| Model      | Output Voltage VDC | Output Current (A) | Output Power (W) |
|------------|--------------------|--------------------|------------------|
| GEN50-30   | 0~50V              | 0~30               | 1500             |
| GEN60-12.5 | 0~60V              | 0~12.5             | 750              |
| GEN60-25   |                    | 0~25               | 1500             |
| GEN80-9.5  | 0~80V              | 0~9.5              | 760              |
| GEN80-19   |                    | 0~19               | 1520             |
| GEN100-7.5 | 0~100V             | 0~7.5              | 750              |
| GEN100-15  |                    | 0~15               | 1500             |
| GEN150-5   | 0~150V             | 0~5                | 750              |
| GEN150-10  |                    | 0~10               | 1500             |
| GEN300-2.5 | 0~300V             | 0~2.5              | 750              |
| GEN300-5   |                    | 0~5                | 1500             |
| GEN600-1.3 | 0~600V             | 0~1.3              | 780              |
| GEN600-2.6 |                    | 0~2.6              | 1560             |

### Factory option

RS-232/RS-485 Interface built-in Standard  
 GPIB (Multi-Drop Master) Interface  
 Multi-Drop Slave Interface  
 Voltage Programming Isolated Analog Interface  
 Current Programming Isolated Analog Interface  
 LAN Interface (Complies with **LXI** Class C)  
 USB Interface

### P/N

-  
 IEMD  
 MD  
 IS510  
 IS420  
 LAN  
 USB

### AC Cords sets (750W only)

| Region                 | Europe                                                                              | Japan                                                                               | Middle East                                                                          | North America                                                                         |
|------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Output Power           | 750W                                                                                | 750W                                                                                | 750W                                                                                 | 750W                                                                                  |
| AC Cords               | 10A/250 Vac L=2m                                                                    | 13A/125 Vac L=2m                                                                    | 10A/250 Vac L=2m                                                                     | 13A/125 Vac L=2m                                                                      |
| Wall Plug              | INT'L 7/VI                                                                          | IEC320-C13                                                                          | SI-32                                                                                | NEMA 5-15P                                                                            |
| Power Supply Connector | IEC320-C13                                                                          |                                                                                     | IEC320-C13                                                                           | IEC320-C13                                                                            |
|                        |  |  |  |  |
| Part Number            | P/N: GEN/E                                                                          | P/N: GEN/J                                                                          | P/N: GEN/I                                                                           | P/N : GEN/U                                                                           |

## Accessories

### 1. Communication cable

RS-232/RS-485 Cable is used to connect the power supply to the PC Controller.

| Mode                   | RS485                | RS232                | RS232                |
|------------------------|----------------------|----------------------|----------------------|
| PC Connector           | DB-9F                | DB-9F                | DB-25F               |
| Communication Cable    | Shield Ground L=2m   | Shield Ground L=2m   | FShield Ground L=2m  |
| Power Supply Connector | EIA/TIA-568A (RJ-45) | EIA/TIA-568A (RJ-45) | EIA/TIA-568A (RJ-45) |
| P/N                    | GEN/485-9            | GEN/232-9            | GEN/232-25           |

### 2. Serial link cable\*

Daisy-chain up to 31 Genesys™ power supplies.

| Mode   | Power Supply Connector | Communication Cable  | P/N      |
|--------|------------------------|----------------------|----------|
| RS-485 | EIA/TIA-568A (RJ-45)   | Shield Ground L=50cm | GEN/RJ45 |

\* Included with power supply



## USA

TDK-Lambda Americas Inc.  
405 Essex Rd. Neptune, NJ 07753  
Tel: +1-732-922-9300 Fax: +1-732-922-1441  
E-mail: sales@us.tdk-lambda.com  
www.us.tdk-lambda.com/hp

## CANADA

ACA TMetrix  
5805 Kennedy Road, Mississauga, Ontario, L4Z 2G3  
Tel: +1-800-665-7301 Fax: +1-905-890-1959  
Email: lambda@aca.ca  
tmetrix.com

## MEXICO

AcMax de Mexico  
39 Poniente 3515 Piso 5 Col. Las Animas  
Puebla, Pue. C.P. 72400  
Tel: 01-800-211-0060 / (222) 891-8484 Fax: 222-264-1445  
Email: info@acmax.mx, Web: www.acmax.mx

## BRAZIL

Suplitech  
Rua Sena Madureira 455, Belo Hte - 31340-000  
Tel: +55-31-3498 1177 Fax: +55-31-3441 0841  
www.suplitech.com.br

## UK

TDK-Lambda UK  
Kingsley Avenue  
Ilfracombe, Devon EX 34 8ES  
Tel: +44-1271-856666 Fax: +44-1271-864894  
E-mail: powersolutions@uk.tdk-lambda.com  
www.uk.tdk-lambda.com

## IRELAND

## FRANCE

TDK-Lambda France  
ZAC des Delaches, CS 41077  
9 rue Thuillere, 91978 Villebon Courtaboeuf  
Tel: +33 1 60 12 71 65 Fax: +33 1 60 12 71 66  
www.fr.tdk-lambda.com

## NETHERLANDS

## SPAIN

## GERMANY

TDK-Lambda Germany  
Karl-Bold-Str.40, D-77855 Achern  
Tel: +49-7841-666-0 Fax: +49-7841-500-0  
E-mail: info.germany@de.tdk-lambda.com  
www.de.tdk-lambda.com

## AUSTRIA

## SWITZERLAND

## ITALY

TDK-Lambda Italy  
Via dei Lavoratori 128/130  
IT 20092 Cinisello Balsamo (MI)  
Tel: +39-02-6129-3863 Fax: +39-02-6129-0900  
E-mail: info.italia@it.tdk-lambda.com  
www.it.tdk-lambda.com

## SCANDINAVIA

## BALTICS

TDK-Lambda Germany  
Karl-Bold-Str.40, D-77855 Achern  
Tel: +49-7841-666-0 Fax: +49-7841-500-0  
E-mail: info.germany@de.tdk-lambda.com  
www.de.tdk-lambda.com

## JAPAN

TDK-Lambda Corporation  
International Sales Division,  
3-9-1, Shibaura, Minato-ku,  
Tokyo 108-0023  
Tel: +81 3-6852-7136 Fax: +81 3-6852-7148  
E-mail: t.morimoto@jp.tdk-lambda.com  
www.jp.tdk-lambda.com

## CHINA

TDK-Lambda Shanghai Office  
28F, Xingyuan Technology Building No.418, Guiping Road,  
Shanghai, 200233 P.R. CHINA  
Tel: +86-21-6485-0777 Fax: +86-21-6485-0666  
www.cn.tdk-lambda.com

TDK-Lambda Beijing Office  
Room 12B11-12B12, Unit 7 DACHENG SQUARE,  
No.28 Xuanwumenxi Street, Xuanwu District Beijing,  
100053, P.R. CHINA  
Tel: +86-10-6310-4872 Fax: +86-10-6310-4874  
www.cn.tdk-lambda.com

TDK-Lambda Hong Kong Office  
1 / F. SAE Technology Centre, 6 science Park East Avenue,  
HongKong Science Park, Shatin, NT.,  
Tel: +852-23766658 Fax: +852-23172150  
www.cn.tdk-lambda.com

## KOREA

TDK-Lambda Corporation  
6F Songok Bldg. 4-1 Soonae-Dong  
Pundang-Gu, Songnam-Shi Kyonggi-Do, 463-020  
Tel: +82-2-556-1171 Fax: +82-2-555-2706  
www.tdk-lambda.co.kr

## MALAYSIA

TDK-Lambda Malaysia  
Lot 709, Nilai Industrial Estate  
71800 Nilai, Negeri Sembilan  
Tel: +60-6-799-1130 Fax: +60-6-799-3277  
www.my.tdk-lambda.com

## SINGAPORE

TDK-Lambda Singapore  
1008 Toa Payoh North # 06-01/08  
Singapore 318996  
Tel: +65-6251-7211 Fax: +65-6250-9171  
www.sg.tdk-lambda.com

## PHILIPPINES

## THAILAND

## INDIA

TDK-Lambda India  
#526, Ground Floor, 10th Main, 7th Cross,  
Jeevanbhimannagar, Bangalore 560 075,  
Karnataka, India  
Tel : +91-80-43550500 Fax : +91-80-43550501  
www.in.tdk-lambda.com

## ISRAEL

## RUSSIA

TDK-Lambda Ltd. Israel  
Kibbutz Givat Hashlosha Tel-Aviv 48800  
Tel: +972-3-9024-333 Fax: +972-3-9024-777  
E-mail: info@tdk-lambda.co.il  
www.tdk-lambda.co.il



TDK-Lambda Americas Inc. 405 Essex Road, Neptune, NJ 07753 USA  
Tel: +1 732 922 9300 Fax: +1 732 922 1441  
www.us.tdk-lambda.com/hp

# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](https://www.artisanng.com)

