ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *ABB / HC Power HCT21-C1019* at our website: ***Click HERE***

HCT21 SERIES
2000W Hi-Reliability MOSFET Switchers

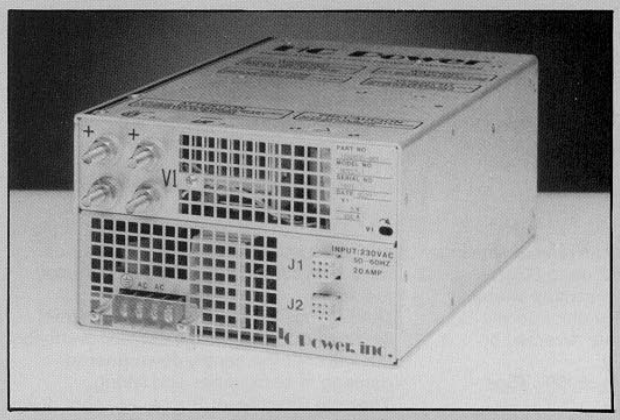


- 3 Phase Power Factor Correction
- .92 Power Factor
- Power MOSFET Design
- Current Mode Control
- Unique Two-Stage Current Limit
- Absolute Current Sharing
- No Minimum Load Required

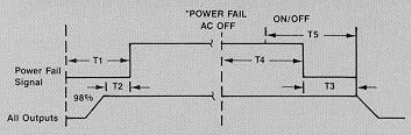

T1 <0.5 Sec
T2 >10 MSec
T3 >5.0 MSec
T4 ≥ 20 MSec
T5 <5.0 MSec after application of remote ON/OFF Control or Overtemp

Power fail sink current = 50 MA. Source current from 3.3K pull up resistor to +5V if desired.

*Power fail signal is floating (open collector and emitter thru an optical coupler) and can be referenced as desired.

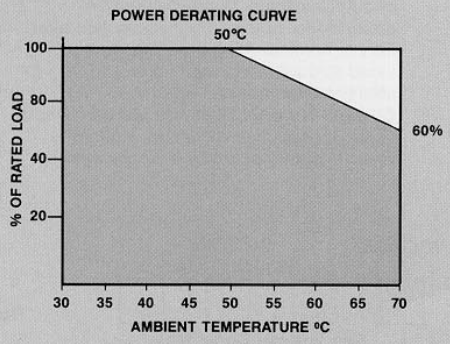

Dedicated to the design & manufacture of high power switchers.

HCT21 SERIES			2000 WATTS, SINGLE OUTPUT	
OUTPUTS	MAIN 1 VDC@A	V2 VDC@A	V3 VDC@A	V4 VDC@A
SINGLE	2 @ 400 3.3 @ 400 4.5 @ 400 5 @ 400 5.2 @ 380 12 @ 167 15 @ 134 18 @ 111 24 @ 84 28 @ 72 36 @ 56 48 @ 42	N/A	N/A	N/A

All specifications and data subject to change without notice.

HC Power, inc.

©Copyright 1992, HC Power, Inc.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

HCT21 SERIES SPECIFICATIONS

INPUT SPECIFICATIONS
AC Input Range: 180-264 VAC, 47-63 Hz, three phase.
Power Factor: .92 typical (.90 minimum at 1/2 load or greater.)
Inrush current: Limited to 40A RMS maximum for 20 milliseconds.
Fusing: All units are fused internally.
Line Transient: Meets ANSI C62.41 (Formerly IEEE-587-1980).

OUTPUT SPECIFICATIONS
Output Power: 2000 watts.
Number of Outputs: 1. (See table)*.
Voltage Adjust Range: ± 10%
Load Regulation: 0.2% no load to full load.
Line Regulation: 0.2% over full input range.
Ripple and Noise: 1% or 50 mV, whichever is greater, when measured at the power supply terminals with a 20 MHz scope.
Hold Up Time: The outputs will remain in regulation for 20 milliseconds after loss of nominal AC power.
Turn On Delay: Under full load conditions the output will be in regulation in less than 500 milliseconds.

Transient Response: The output will recover to 1% regulation within *100* microseconds from a step load change of 25%. No overshoot or undershoot at turn-on or turn-off.
Output Polarity: The output is floating and may be referenced as desired by the user.
Minimum Load: *No* minimum loading is required.

LOGIC AND CONTROL
Remote Sense: Output has remote sensing which will compensate for up to 500 MV load cable loss. Output is sensed internally if a sense line is open. No damage will result if the sense lines are reversed or shorted.
Remote Margin: ± 3% to ± 10%. (See installation instructions.)
Remote Inhibit: Standard.
AC Power Fail Warning: A logic signal is provided at least 5 milliseconds before loss of output voltage. Signal will not be activated for at least 20 milliseconds after loss of nominal AC power. Signal is provided through an opto-coupler and may be referenced as desired.
Current Sharing: Standard feature. Outputs of similar supplies will share within 5% when interconnected by a single wire.

Current Monitor: Calibrated voltage proportional to the output current of V1. 1V (± 5%) at full load.
DC-OK: Optional Form "C" relay is activated when the output drops 5% below nominal. (10% for 2V outputs).


PROTECTION
Over Voltage Protection: Standard. If the output exceeds the nominal voltage by 20-30%, the OVP circuit will be activated and will turn the output off. AC input or remote on/off must be recycled to restart the supply.
Over Current: Unique two-stage current limit circuit allows for momentary overloads but will shut the supply down prior to damage to backplanes and wiring.
Thermal Shutdown: Supply will shut down if the internal temperature reaches an unsafe operating level. Restart is automatic when the supply returns to the normal operating range.
Reverse Polarity: Output protected against reverse voltage up to the maximum current rating.

ORDERING INFORMATION

Model **HCT21** – [ ] – [ ] [ ] [ ]
VOLTAGE V1 (See Voltage Code Table) — OPTIONS (In Alpha Order)

Option Codes: D = DC-OK
M = Power Supply OK
R = Reverse airflow.


Note: HC POWER can configure power supplies for your specific requirements. Please contact the factory.

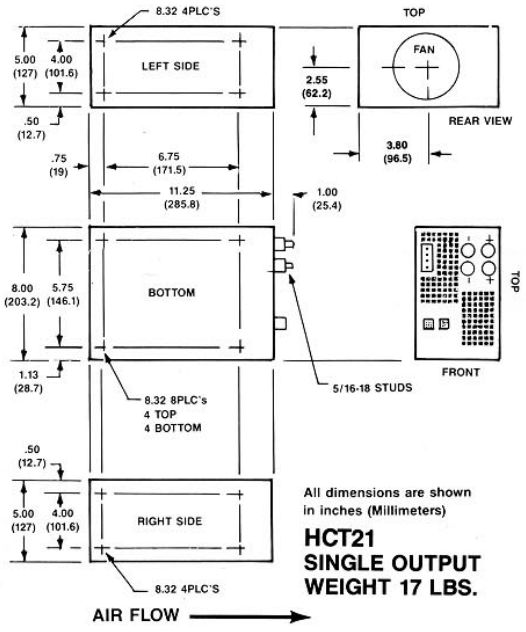


All dimensions are shown in inches (Millimeters)

HCT21
SINGLE OUTPUT
WEIGHT 17 LBS.

VOLTAGE CODE TABLE			
0 = 2 Volts	1 = 5 Volts	3 = 15 Volts	6 = 28 Volts
E = 3.3 Volts	H = 5.2 Volts	4 = 18 Volts	7 = 36 Volts
G = 4.5 Volts	2 = 12 Volts	5 = 24 Volts	8 = 48 Volts



J1-1 = V1 + sense
J1-2 = V1 margin
J1-3 = +5V reference
J1-4 = V1 – sense
J1-5 = Power fail RTN
J1-6 = Remote ON/OFF
J1-7 = Remote ON/Off pull up
J1-8 = Power fail
J1-9 = Power fail pull up



J2-1 =
J2-2 = V1 current monitor (+)
J2-3 = V1 current monitor (–)
J2-4 =
J2-5 = V1 current share
J2-6 =
J2-7 = +5V logic (50 MA)
J2-8 =
J2-9 = N/C

MOLEX P/N 03-06-1091
MOLEX MATING P/N 03-06-2092
MOLEX MALE PINS P/N 02-06-2103

HC Power, inc.
17032 Armstrong Avenue, Irvine, CA 92714-5716 • Phone: (714) 261-2200 • FAX (714) 261-6584

Printed in USA

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP