



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗


### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

## PSU/RGU

CLEI: SIPUBBBB\_\_

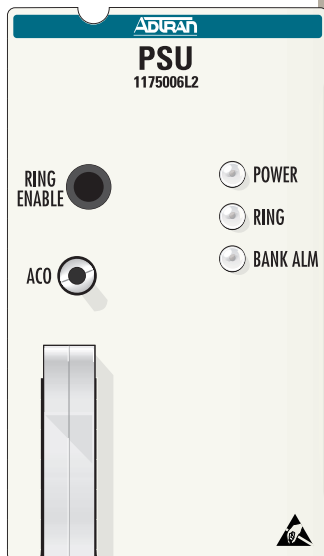

## TURN UP STEPS

- 1 Unpack the Total Access 750 PSU card and inspect for damage. If damage is apparent, refer to your carrier or supplier for remedy.
- 2 Insert PSU card into Total Access 750 chassis slot marked PSU. To insert, hold the PSU card by the faceplate while supporting the bottom edge of the card. Align the card edges with the guide grooves in the Total Access 750 chassis. Insert into chassis until the edge card connector seats firmly into the chassis backplane. Lock the unit in place by pushing in on the locking lever.

## COMPLIANCE CODES

This product is intended to be installed in products providing a Type "B" or "E" enclosure, and in a Restricted Access Location.

Code	Input	Output
Power Code (PC)	F	C
Telecommunication Code (TC)	-	-
Installation Code (IC)	A	-

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by ADTRAN could void the user's authority to operate this equipment.

## STATUS LEDs

- |                   |                                  |          |                                                   |
|-------------------|----------------------------------|----------|---------------------------------------------------|
| <b>POWER</b>      | <input checked="" type="radio"/> | On       | Power on                                          |
| <b>RING</b>       | <input checked="" type="radio"/> | On       | Ring enabled                                      |
|                   | <input type="radio"/>            | Off      | Ring disabled                                     |
| <b>BANK ALARM</b> | <input checked="" type="radio"/> | On       | Alarm condition                                   |
|                   | <input type="radio"/>            | Off      | Normal operation                                  |
|                   | *                                | Flashing | Alarm acknowledged by pressing the ACO pushbutton |

## ALARM CUT-OFF (ACO) PUSHBUTTON

- Depress to disable any audible bank alarms.

*Note: The ACO pushbutton does not override power failure alarms*

### Alarm Notification

Alarm Condition	Relays Activated
Local Alarm	MJR, MJVR
Remote Alarm	MJR, MJVR
AIS Alarm	MJR, MJVR
PSU Power Fuse Fails	MJR, MJVR, -48ALM
Power Failure Alarm	MJR, MJVR
Alarms ACO Deactivates	MJR

### Warning:

*Ring Voltage is hazardous! Disable Ring Voltage from the Total Access 750/850 by pressing the Ring Enable switch and ensuring that the Ring LED is OFF prior to performing open chassis or wiring operation.*

## WARRANTY

Warranty for Carrier Networks products manufactured by ADTRAN and supplied under Buyer's order for use in the U.S. is ten (10) years. For a complete copy of ADTRAN's U.S. Carrier Networks Equipment Warranty: (877) 457-5007, Document 414.





## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)