ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent 10895A* at our website: ***Click HERE***

Agilent
High Performance Laser Interferometer Positioning for VMEbus Systems

Product Overview

Agilent 10895A Laser Axis Board
Agilent 10896B Laser Compensation Board
Agilent 10897B High Resolution Laser Axis Board
Agilent 10898A High Resolution Dual Laser Axis Board
Agilent E1708A Remote Dynamic Receiver
Agilent E1709A Remote High Performance Receiver

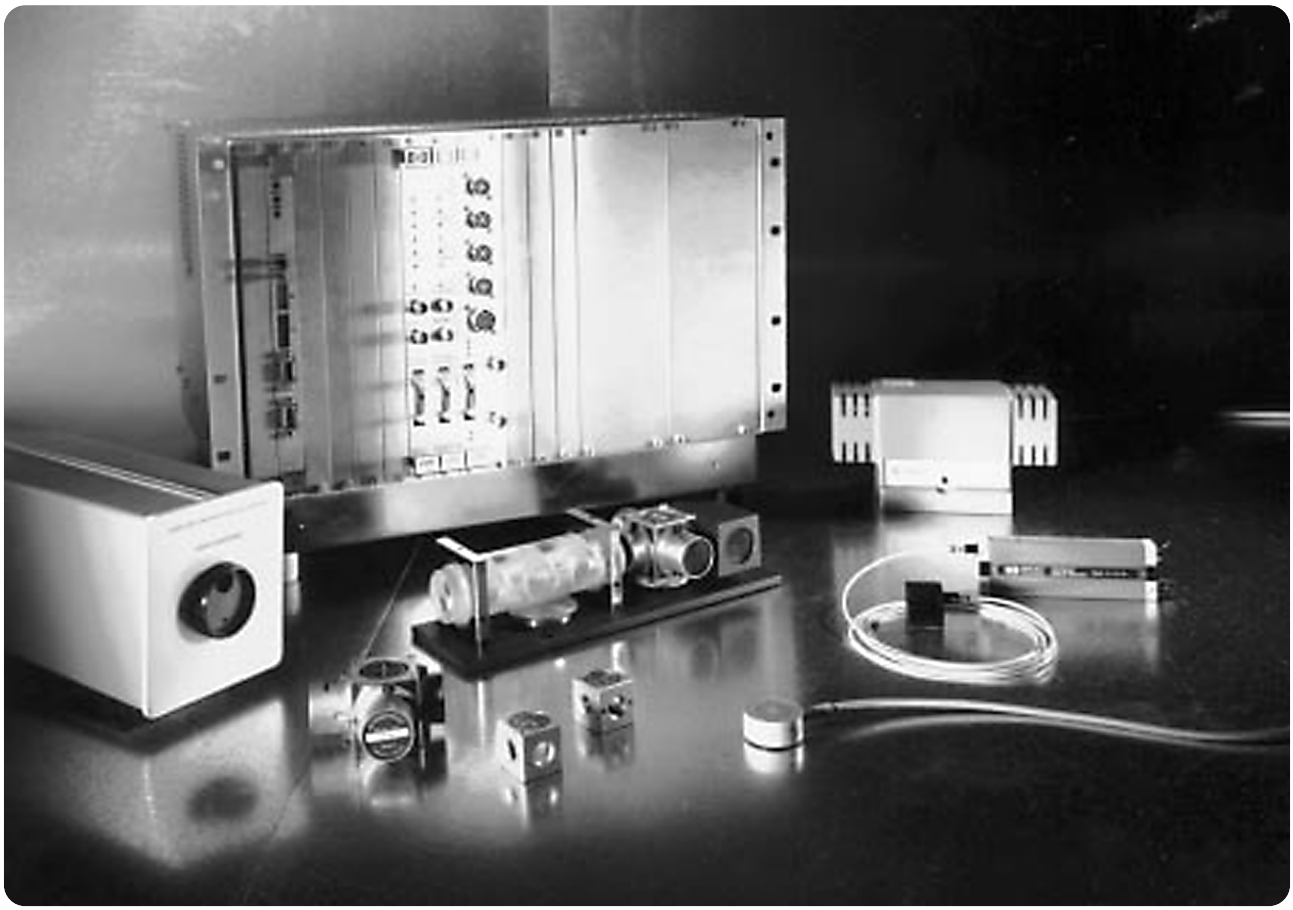

Agilent Technologies

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Flexible System Design Components

- **Laser Axis Boards**
- **Environmental Compensation**
- **Dynamic Receivers**

Agilent Technologies offers the most complete and highest performance laser interferometry electronics available for the 32-bit industry standard backplane, the VMEbus. Products include two laser axis boards that measure the movement of a system, a very flexible laser compensation board that accounts for environmental factors affecting the measurement, and a specialized receiver intended for the most demanding sub-nanometer resolution measurements of moving systems. Typical applications for a VMEbus-based positioning system are IC manufacturing equipment (wafer steppers, step and scan tools, and E-beam lithography systems), precision machine tools, and custom stages. The precision and accuracy of position measurements are vital to the performance of these systems. A laser interferometer positioning system, when built into these types of equipment, measures the position and controls the motion of the platform with more accuracy than any other available method.

Performance Features

- Resolution up to 0.3 nm depending upon the optics and electronics selected
- Target velocities up to 500 mm/s with plane mirror interferometers or 1000 mm/s with linear interferometers
- Up to 10 MHz data update and transfer rates
- Flexible methods for compensating errors due to environmental effects
- Industry standard VMEbus electronics to simplify system design

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Product Summary

Agilent 10895A Laser Axis Board (see page 4)

- Register programmed position measurement board for VMEbus
- Position may be read over the VMEbus or via hardware outputs
- Multiple axis capability

Agilent 10896B Laser Compensation Board (see page 6)

Improves system accuracy by compensating for changes in wavelength of light (WOL) and for changes induced by thermal expansion.

- Two WOL compensation methods:
  a) Sensor to measure temperature and pressure of air and account for humidity for automatic calculation of WOL correction
  b) Direct measurement of changes in WOL using an Agilent 10717A Wavelength Tracker
- Supports up to four material temperature sensors to compensate for thermal expansion

Agilent 10897B High Resolution Laser Axis Board (see page 8)

- Offers same features as 10895A Laser Axis Board
- Improves measurement resolution (up to 0.3 nm with a high-resolution interferometer)
- Allows measurement of systems moving at higher speed (up to 1 m/s with linear interferometers)
- Dramatically reduces data age uncertainty allowing extremely accurate measurement and control of moving systems
- Flexible cabling for rapid system design

Agilent 10898A High Resolution Dual Laser Axis Board (see page 10)

- Two high resolution axis measurement capacity on one board
- Resolution up to 0.31 nm
- 2.7 m/s plane mirror slew rate capability
- Sub-nanosecond variable data age
- 5 MHz dual-channel data transfer

Agilent E1708A Remote Dynamic Receiver and E1709A remote High Performance Receiver (see page 12 and 13)

- Targeted for applications that require subnanometer measurement resolution of systems in motion
- Doubles the number of axes per application
- Accurate displacement measurements at 2 m/s with linear optics (1 m/s with plane mirror optics)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 10895A Laser Axis Board

- **Agilent's first VME Axis Board**
- **High reliability**


Fast and Easy Data Access

The 10895A is a register-programmed position axis board that provides a 32-bit position word in fractional wavelengths. The position word is readable over the VMEbus and available from a real-time hardware output. The 10895A's standard VMEbus interface makes controlling the board easy and high speed data sampling possible.

For open-loop applications the position word can be read over the VMEbus from a control processor. For closed-loop applications the position word can also be read over the VMEbus from a control processor and then a software difference equation can be used to produce a motor drive signal. Or a custom VMEbus servo board can be designed that reads the real-time position hardware output directly from the P2 connector of the 10895A. The custom VMEbus servo board then processes the position information using a difference equation and produces a motor drive signal.

Speed System Integration

The 10895A Laser Axis Board is a 6U-size board that complies electrically and mechanically with Revision C.1 of the VMEbus specifications. Measurement input signals to the 10895A can be either through its front panel or through the board's VMEbus P2 connector. For a multiaxis system, a multiaxis interconnect cable is available as an option.

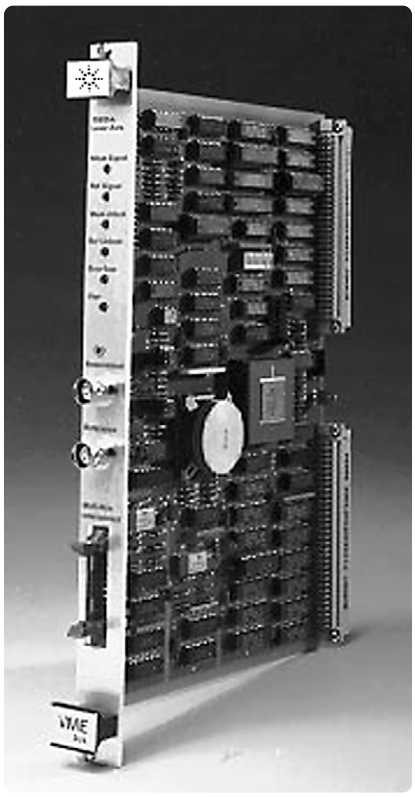

Improve system reliability by using the Agilent 10895A, which has demonstrated a Mean Time Between Failures of more than 400,000 hours.

The 10895A uses the Agilent 10790A/B/C Receiver Cable and 10791A/B/C Laser Head Cable. Operation of the laser axis board is straightforward, and the operating manual provides complete thorough documentation. Installation of the laser head and optics is covered in the Laser and Optics User's Manual, available with the laser head as Option AV4. Like all VMEbus laser electronics from Agilent, the 10895A has a three-year warranty.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

VMEbus Position Output

Data Format

Units: fractions of a wavelength
2's Complement: 32-bit parallel binary
Positive Logic
Least Significant Bit (or one count) equals resolution

Data Rate Over Backplane

>100 kHz

Data Age and Sample Ambiguity

After a sample operation, the value in the position register will reflect an actual position that occurred 0.1 to 1.4 µs before the sample operation was initiated.

Sample Delay

The position register may be read 1.5 µs after a sample operation.

P2 Connector Hardware Position Output

Data Format

Units: fractions of a wavelength
2's Complement: 32-bit parallel binary
Positive Logic
Least Significant Bit (or one count) equals resolution

Data Update Rate

5517A: 1.5–2.0 MHz
5517B: 1.9–2.4 MHz
5517C: 2.4–3.0 MHz
(Hardware included to synchronize to slower clocks)

Data Age

5517A: 2.1–4.1 µs
5517B: 1.8–3.3 µs
5517C: 1.5–2.7 µs

Data Age is dependent on the laser head reference signal (split-frequency) and on knowing exactly when, in relation to the rising edge of the Error Clock, the Position Error lines are sampled—call this time ΔT.

$$\text{Data Age} = 0.34\ \mu s + \Delta T\ \mu s + \frac{4.0 \pm 0.5}{\text{Reference (in MHz)}}\ \mu s$$

Additionally, the Data Age may vary up to 0.1 µs typically and up to 0.25 µs in a worst-case situation as a result of the reference frequency varying over time.

General Information

VME Compliance

Complies with VME
Specification Rev. C.1
6U size
A16 Data Transfer Cycles
A24 Data Transfer Cycles
D16 Data Transfer Cycles
D32 Data Transfer Cycles
D08 (O) Interrupt Acknowledge Cycles

Power Requirements

5 Vdc +0.25 V/–0.125 V at less than 2.8 A

Cooling Requirements

19 linear meters (60 linear feet) per minute minimum for 0–40°C operation
76 linear meters (250 linear feet) per minute minimum for 0–55°C operation

Cables

10790A/B/C Receiver Cable
10791A/B/C Laser Head Cable

Axis Cabling:

Specify	for
Option 002	2 axis system
Option 003	3 axis system
Option 004	4 axis system
Option 005	5 axis system
Option 006	6 axis system

Weight: 0.45 kg (1 lb)

System Performance with the Agilent 10895A


			Maximum Axis Velocity*		
			Laser Head		
Optics	**Resolution**	**Range**	**5517A**	**5517B**	**5517C**
Linear or Single Beam	λ/64 or 10.0 nm (0.4 µ in)	±10.6 m (34.8 ft.)	406 mm/sec (16 in/sec)	508 mm/sec (20 in/sec)	711 mm/sec (28 in/sec)
Plane Mirror	λ/128 or 5.0 nm (0.2 µ in)	±5.3 m (17.4 ft.)	203 mm/sec (8 in/sec)	254 mm/sec (10 in/sec)	356 mm/sec (14 in/sec)
High Resolution	λ/256 or 2.5 nm (0.1 µ in)	±2.65 m (8.7 ft.)	102 mm/sec (4 in/sec)	127 mm/sec (5 in/sec)	178 mm/sec (7 in/sec)

* Maximum axis velocity depends on the combination of laser head and optics used for the axis.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 10896B Laser Compensation Board

- **Calculate absolute wavelength of light**
- **Monitor changes in wavelength of light**
- **Monitor stage temperature effects**

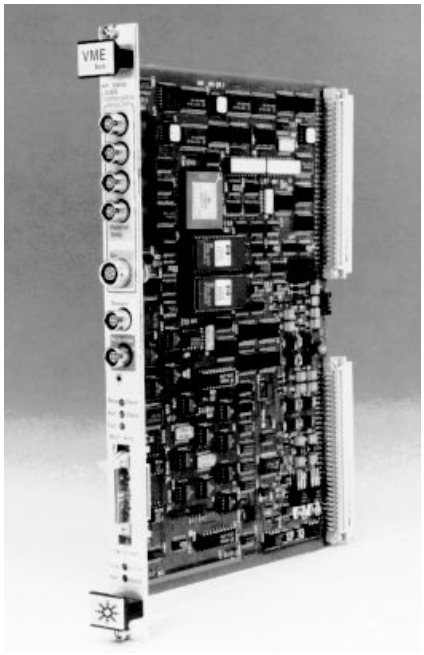

Improve system accuracy and repeatability using Agilent 10896B VMEbus laser compensation electronics.

Compensating for environmental effects increases system accuracy

Every laser-interferometer positioning system depends on the laser's wavelength of light (WOL) as its basic scale length. However, in air the laser's WOL depends on the air's index of refraction, which is a function of air temperature, pressure, relative humidity, and gas composition. The 10896B Laser Compensation Board can be used with both the 10897B High Resolution Laser Axis Board and the 10895A Laser Axis Board to increase the accuracy and repeatability of the laser-interferometer positioning system by compensating for the changes in WOL due to changes in your system's operating environment.

The 10896B can perform WOL compensation in different ways. For all compensation schemes, the 10896B's firmware automatically produces a compensation number that adjusts the position measurements of all axes in the system.

For greatest accuracy and repeatability, a 10717A Wavelength Tracker can be used to provide measurement repeatability up to ±0.14 parts per million (ppm). This technique uses an additional laser axis and tracks changes in the air's index of refraction.

Another technique uses environmental sensors to measure the values of air temperature and pressure and account for ambient humidity. The 10896B then uses these values to calculate the appropriate WOL compensation number using Edlen's equation.

The 10751C/D Air Sensor can be used to provide an accuracy up to ±1.4 ppm. Alternatively, you can use your own environmental sensors to send information to the 10896B. The 10896B also allows you to compensate for thermal expansion of objects under control by measuring their temperature and correcting back to a standard temperature. This allows you to further improve positioning accuracy by compensating for all environmental effects. Again, you have a choice of material temperature sensors. You can use sensors purchased from Agilent (the 10757D/ E/F Material Temperature Sensor) or your own temperature sensors.

The 10896B is a single-width front panel, 6U-size board. It uses advanced surface mount technology to provide reliable, compact electronics. Like all VMEbus laser electronics from Agilent, the 10896B has a three-year warranty.

The 10896B supports a wavelength tracker, an air sensor, and up to four temperature sensors. Any of the four temperature sensor inputs can be programmed for use with custom sensors. For design flexibility, the sensor input signals can be routed to the front panel or the board's VMEbus P2 connector.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

Environmental Sensors

10717A Wavelength Tracker
10751C/D Air Sensor
10757D/E/F Material Temperature Sensor (up to four)

Resolution

Wavelength Tracker: 5 nm
Analog Sensor Inputs: 76.3 mV

Backplane I/O Characteristics

All backplane I/O signals are TTL compatible. Refer to the Agilent 10896B manual for further details.

Sensor inputs: ±2.5 volts

General Information

VME Compliance

Complies with VME Specification Rev. C.1
Single width
6U size

A16 Data Transfer Cycles
A24 Data Transfer Cycles
D08 (OE) Data Transfer Cycles
D16 Data Transfer Cycles
D08 (O) Interrupt Acknowledge Cycles

Compensation

Environment:
Pressure: 760 mm ±25 mm Hg
Relative Humidity: 50% ±10%
Temperature: as shown

	Measurement Accuracy*		
	±0.1°C	**±1.0°C**	**±5.0°C**
No compensation (@20°C)**	±9.0 ppm	±9.9 ppm	±14.0 ppm
10751C/D Air Sensor (@20°C and 10886A)	±1.5 ppm	±1.6 ppm (typical)	±1.7 ppm
Wavelength Tracking Compensation*	±0.15 ppm	±0.19 ppm	±0.44 ppm
Measurement in Vacuum	±0.1 ppm	±0.1 ppm	±0.1 ppm
Measurement in Vacuum with factory Calibration of Laser Head to MIL STD 45662	±0.02 ppm	±0.02 ppm	±0.02 ppm

*These accuracy specifications include the laser head term, but exclude electronics accuracy and interferometer nonlinearity terms.
**No compensation means that no correction in compensation number occurs during environmental changes.
***System accuracy equals these values (measurement repeatability) for a calibrated laser head plus accuracy of initial compensation value.

Power Requirements

+5 Vdc +0.25 V/–0.125 V
at less than 2.8 A
+12 Vdc +0.6 V/–0.36 V
at less than 0.4 A
–12 Vdc –0.6 V/+0.36 V
at less than 0.4 A

Cooling Requirements

19 linear meters (60 linear feet) per minute minimum for 0–40°C operation
76 linear meters (250 linear feet) per minute minimum for 0–55°C operation

Cables (if system includes 10717A):

10880A/B/C Receiver Cable
10881A/B/C/D/E/F Laser Head Cable

Axis Cabling (if system includes 10717A):

Specify	**for**
Option 002	2 axis system
Option 003	3 axis system
Option 004	4 axis system
Option 005	5 axis system
Option 006	6 axis system

Weight: 0.45 kg (1 lb)


Ordering Information

For ordering information please see the Price List.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 10897B High Resolution Laser Axis Board

- **Highest resolution**
- **10 MHz data transfer**
- **Low variable data age**

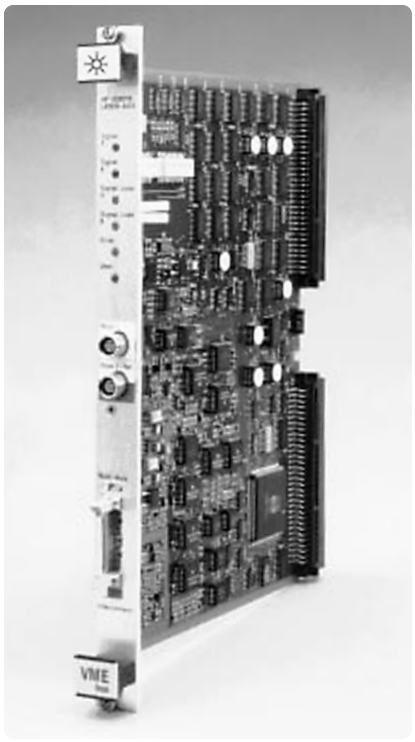

Get the highest positioning accuracy and repeatability available with the Agilent 10897B High Resolution Laser Axis Board for VMEbus.

High Performance for Advanced Applications

The new 10897B High Resolution Laser Axis Board provides the highest performance ever offered by Agilent Technologies. The improved position resolution—compared to previous laser systems—and low noise offer the ultimate positioning repeatability and accuracy for advanced products such as IC fabrication equipment. The Agilent 10897B provides measurement resolution up to λ/2048, or 0.3 nm (3 Angstroms), the highest resolution commercially available.

The 10897B is tested at frequencies equivalent to 700 mm/s plane mirror slew rates, double that of the 10897A. To provide unsurpassed positioning accuracy for dynamic measurements, the 10897B provides dramatically reduced data age ambiguity compared with previous Agilent systems. Data age ambiguity, the unknown variation in data age, has been reduced to less than 1 ns. This provides high accuracy when compensating moving systems for the delay between the position measurement and the time the position information is available. This improved dynamic accuracy is especially important for E-beam machines and step and scan IC fabrication cameras.

The 10897B contains an onboard, low-pass filter which may be enabled to provide more stable operation in low signal-tonoise conditions. This filter is programmable to provide the most stable positioning for your specific application. The 10897B High Resolution Laser Axis Board is a register-programmed position axis board that provides a 36-bit position word in fractional wavelengths. The position word is readable over the VMEbus and is also available from a real-time hardware output on the A and C rows of the P2 connector. The 10897B offers very high data rates to provide high bandwidth, high-performance closed-loop positioning for critical applications.

Flexible VMEbus Electronics Speed System Integration

The 10897B High Resolution Laser Axis Board is a 6U-size board that complies electrically and mechanically with Revision C.1 of the VMEbus specifications. The 10897B's standard VMEbus interface speeds system integration, saving valuable time and money. The heart of the 10897B is a proprietary, CMOS IC specifically designed for this application. Surface mount technology is used to provide a compact, reliable design. Like all VMEbus laser electronics from Agilent, the 10897B has a three-year warranty.

To further simplify and speed system layout, the 10897B also offers programmable signal routing. Cable routing is flexible; the reference and measurement signals can come from either the front panel connectors, the rear P2 connector, or the multiaxis interconnect cable. The 10897B uses the Agilent 10880A/B/C Receiver Cable and 10881A/B/C/D/E/F Laser Head Cable.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

VMEbus Position Output

Data Format

Units: fractions of a wavelength
2's Complement: choose any 32 of 35 bits to read
Positive Logic
Least Significant Bit (or one count) equals resolution

Data Rate Over Backplane

>100 kHz

Sample Data Age and Delay

Fixed: After a synchronous sample operation, the value in the position register will reflect the actual position that occurred approximately X ns before the sample operation was initiated. There are two user-selectable values of X, 290 ns and 790 ns.

Variable (typically)

<800 ps over the full power supply voltage specification, and <60 ps/°C.

Delay

When X=290 ns is selected, the position data is available to be read on the VMEbus 600 ns after the sampling operation. For X=790 ns, position data is available on the VMEbus 100 ns after the sampling operation.

P2 Connector Hardware Position Output

Data Format

Units: fractions of a wavelength
2's Complement: 36-bit parallel binary
Positive Logic
Least Significant Bit (or one count) equals resolution

Data Update Rate

10 MHz (Hardware included to synchronize to slower clocks)

Data Age

Fixed: There is a 1190 ±20 ns time lag between actual position and the position at the hardware output lines (located on rows A and C of P2 connector).

Variable (typically)

<800 ps over the full power supply voltage specification, and <60 ps/°C.

General Information

VME Compliance

Complies with VME Specification Rev. C.1
6U size
A16 Data Transfer Cycles
D16 Data Transfer Cycles
A24 Data Transfer Cycles
D32 Data Transfer Cycles
D08 (O) Interrupt Acknowledge Cycles

Power Requirements

5 Vdc +0.25 V/–0.125 V at less than 3.5 A
+12 V ±0.5 V at less than 0.1 A
–12 V ±0.5 V at less than 0.025 A

Cooling Requirements

19 linear meters (60 linear feet) per minute min. for 0–40°C operation
76 linear meters (250 linear feet) per minute min. for 0–55°C operation

Cables

10880A/B/C Receiver Cable
10881A/B/C/D/E/F Laser Head Cable

Axis Cabling:

Specify	for
Option 002	2 axis system
Option 003	3 axis system
Option 004	4 axis system
Option 005	5 axis system
Option 006	6 axis system
Option 007	7 axis system

Weight: 0.45 kg (1 lb)

System Performance with the Agilent 10897B


			Maximum Axis Velocity*			
			Laser Head			
Optics	**Resolution**	**Range**	**5517A**	**5517B**	**5517C**	**5517D†**
Linear or Single Beam	λ/512 or 1.2 nm (0.05 µ in)	±21.2 m (69.9 ft.)	406 mm/s (16 in/s)	508 mm/s (20 in/s)	711 mm/s (28 in/s)	1000 mm/s (39.4 in/s)
Plane Mirror	λ/1024 or 0.6 nm (0.025 µ in)	±10.6 m (34.8 ft.)	203 mm/s (8 in/s)	254 mm/s (10 in/s)	356 mm/s (14 in/s)	500 mm/s (19.7 in/s)
High Resolution	λ/2048 or 0.3 nm (0.012 µ in)	±5.3 m (17.4 ft.)	102 mm/s (4 in/s)	127 mm/s (5 in/s)	178 mm/s (7 in/s)	250 mm/s (9.84 in/s)

* Maximum axis velocity depends on the combination of laser head and optics used for the axis.
† Agilent 10780C or 10780F receivers used at this velocity must have serial prefix 3546 or higher.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 10898A High Resolution Dual Laser Axis Board

- **Resolution to 0.31 nm**
- **2.7 m/s plane mirror slew rate capability**
- **Sub-nanosecond variable data age**
- **5 MHz dual-channel data transfer**

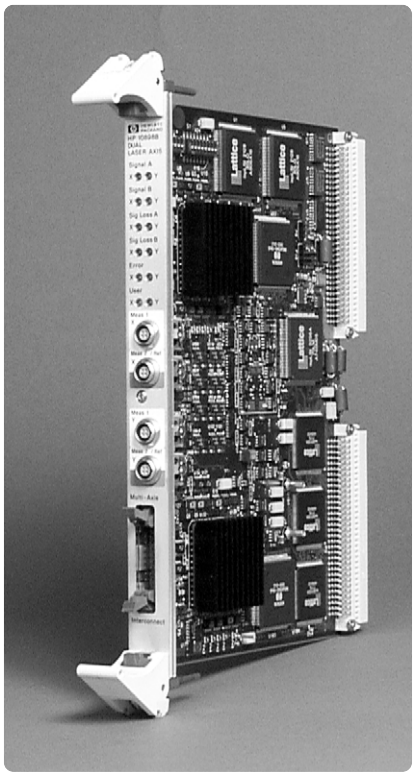

Dual Axis VME Board for Advanced Applications

The Agilent 10898A Dual Laser Axis Board provides the same resolution of the 10897B High Resolution Laser Axis Board with increased slew rates and reduced noise. The increased stage velocity limits and low noise compared to previous laser systems offer the premium positioning repeatability and accuracy for advanced products such as IC fabrication equipment. Like its predecessor the 10897B, the 10898A provides measurement resolution to (/2048 (0.3 nm) with the high resolution plane mirror interferometer.

The 10898A is tested at frequencies equivalent to 2700 mm/s plane mirror slew rates. Both the 10897B and 10898A provide superior dynamic positioning measurements accuracy as required for e-beam and step-and-scan semiconductor exposure systems. The dynamic positioning accuracy has been improved by reducing the variable data-age to less than 1 nanosecond for most applications. Systems can compensate for data-age, the constant time lag between triggering a measurement and receiving the data, but not for variable data-age, the portion that changes and translates directly into stage position error. For example, a stage moving at 500 mm/s with 800 ps of variable data age has a minimum 0.4 nm position error due to variable data age.

The 10897B and the 10898A have a low-pass filter with programmable coefficients that may be enabled to provide optimal operation in low signal-to-noise conditions.

The 10898A Dual Laser Axis Board provides a 35-bit position word in fractional wavelengths. The position word is available over the VMEbus and from a real-time hardware output on the A and C rows of the P2 connector. The 10898A offers high data rates for wide bandwidth, high-performance closed-loop applications. also offers solutions to get the high-speed multi-axis position data into your DSP engine for precision positioning.

Flexible VMEbus Electronics Speed System Integration

The 10898A Dual Laser Axis Board is a 6U-size board that complies electrically and mechanically with Revision C.1 of the VMEbus specifications. The 10898A's standard VMEbus interface speeds system integration, saving valuable time and money. The heart of the 10898A are proprietary bipolar and CMOS ICs specifically designed for high-precision dynamic closed-loop measurements. Surface mount technology is used to provide a compact, reliable design. Like all VMEbus laser electronics, the 10898A has a three-year warranty. To further simplify and speed system layout, the 10898A also offers programmable signal routing. Cable routing is flexible; the reference and measurement signals can come from either the front panel connectors, or the multi-axis interconnect cable.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

VMEbus Position Output

Data Format

Units: fractions of a wavelength
2's Complement: choose any 32 of 35 bits to read.
Positive Logic.
Least Significant Bit (or one count) equals resolution

Data Rate Over Backplane

100 kHz (minimum) VMEbus cycle rate

Sample Data Age and Delay

Fixed With respect to the rising edge of the 10 MHz P2 clock pin immediately after assertion of one of the asynchronous sample pins of P2, the value in the position register will reflect the actual position that occurred approximately N ns before. N= 262 ns or 762 ns, user selectable.

Variable (typical) <800 ps over the full power supply voltage specification and <40 ps/°C.

Delay

When N=262 ns is selected, the position data is available to be read on the VMEbus 600 ns after the sampling operation. For N=762 ns, position data is available on the VMEbus 100 ns after the sampling operation.

P2 Connector Hardware Position Output

Data Format

Units: fractions of a wavelength 2's Complement: 36-bit parallel binary.
Positive Logic.
Least Significant Bit (or one count) equals resolution.

Data Update Rate

10 MHz using a single channel, 5 MHz using both channels
Hardware included to synchronize to slower clocks.

Data Age

Fixed There is 1062 ns +/- 1 ns time lag between position information at Meas1 and Meas2/Ref connectors and the digital data at the P2 hardware output lines.

Variable (typical) <800 ps over the full power supply voltage specification, and <40 ps/°C.

General Information

VME Compliance

VMEbus Specification
Electrical Rev. C.1
Mechanical 6U size, VME64X
A16 Data Transfer Cycles
D16 Data Transfer Cycles
A24 Data Transfer Cycles
D32 Data Transfer Cycles
D08 (O) Interrupt Acknowledge Cycles

Power Requirements

5 Vdc +0.25 V/-0.125 V,
< 4.5 A
+12 V ±0.5 V, < 0.2 A

Operating Temperature

0-40°C with 19 linear meters (60 linear feet) per minute minimum for cooling.

Recommended Cables

N1250A/B Receiver Cable with N1251A/B Laser Head Cable

Axis Cabling

Specify	for
Option 002	2 board group
Option 003	3 board group
Option 004	4 board group
Option 005	5 board group
Option 006	6 board group
Option 007	7 board group

For board groups >7, consult factory

High-speed Data Handling

Consult factory for multi-axis high-speed data handling.

Documentation option Option 101 (Operating Manual- English)
Weight: 0.45 kg (1 lb)

System Performance with the Agilent 10898A

			Maximum Axis Velocity*				
			Laser Head				
Optics	**Resolution**	**Range**	**5517A**	**5517B**	**5517C**	**5517D†**	**10898A Maximum**
Linear or Single Beam	λ/512 or 1.2 nm (0.05 µ in)	±21.2 m (69.9 ft.)	406 mm/s (16 in/s)	508 mm/s (20 in/s)	711 mm/s (28 in/s)	1000 mm/s (39.4 in/s)	5400 mm/s
Plane Mirror	λ/1024 or 0.6 nm (0.025 µ in)	±10.6 m (34.8 ft.)	203 mm/s (8 in/s)	254 mm/s (10 in/s)	356 mm/s (14 in/s)	500 mm/s (19.7 in/s)	2700 mm/s
High Resolution	λ/2048 or 0.3 nm (0.012 µ in)	±5.3 m (17.4 ft.)	102 mm/s (4 in/s)	127 mm/s (5 in/s)	178 mm/s (7 in/s)	250 mm/s (9.84 in/s)	1350 mm/s

* Maximum axis velocity depends on the combination of laser head, optics, receiver and electronics used for the axis.
Consult with you local Agilent Field engineer to optimize the Agilent system configuration for your application.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent E1708A Remote Dynamic Receiver

- **For use with the Agilent 10897B**
- **For moving systems**

The E1708A Dynamic Receiver is designed for use in the most demanding applications requiring sub-nanometer resolution measurements of systems in motion. The receiver extends the performance of the 10897B High Resolution Laser Axis Board for VMEbus by providing system performance consistent with the high resolution and low variable data age of the 10897B.

The E1708A uses an optical fiber to transport the beam from a remote sensor assembly to the electronics. The E1708A improves measurement accuracy and repeatability by enabling you to mount heat dissipating electronics away from the measurement area. The fiber optic cable also allows mounting design flexibility and easier access to the receiver attenuation and squelch adjustments.

As the Doppler shift caused by motion of the system stage changes the measurement frequency, the E1708A ensures minimal phase processing errors. The receiver also provides immunity to errors induced by changes in measurement signal power level.



Agilent E1707A and E1708A Dynamic Receivers provide more accurate positioning data for moving systems.

Specifications

Optical Input

Dynamic Range
10:1

Sensitivity
2.2 µW (E1708A with 2-m cable,
5 µW with 10-m fiber cable)

Alignment Tolerances
Roll: ±3°
Pitch: ±1°
Yaw: ±1°

The E1708A is self-aligning when the remote sensor is mounted to the following optics: Agilent 10715A, 10716A, 10717A, 10719A, 10721A, 10735A, or 10736A.

Electrical Output

Output Signal
Differential square wave at Dopplershifted frequency (100 kHz to 7.2 MHz)

Fixed Data Delay: 86 ns (typical)*
0.15 ns/°C (typical)

Errors due to frequency variations and 3:1 amplitude variations:*
±1.2 nm for linear optics
±0.6 nm plane mirror optics
±0.3 nm for high resolution optics

Signal Strength Monitor
0–8 volts proportional to optical input signal

General Information

Power Requirements
15 Vdc ±1 V at less than 250 mA

Heat Dissipation
0.0 W for remote sensor
3.8 W typical for receiver

Temperature Range
0–40°C operating

Fiber-Optic Cable Length
2 m standard
10 m maximum

Weight
170 g (6.0 oz) for E1708A
26 g (0.9 oz) for remote sensor with 2-m cable

*For input signal power
<150 µW for E1707A
<200 µW for E1708A

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent E1709A
Remote High Performance Receiver


- **0.2 mw sensitivity for increased axes count**
- **2 meter/s slew rate capability for increased stage speeds**
- **Errors limited to ±1LSB over entire frequency range and up to 25:1 amplitude range**

The E1709A Remote High Performance Receiver is for use in the most demanding applications requiring sub-nanometer measurement resolution of systems in motion.

The E1709A has up to 11 x the sensitivity of its predecessor, the E1708A, enabling you to more than double the number of axes for your application.

This receiver also has more than double the bandwidth of the E1708A enabling accurate displacement measurements at 2 m/s with linear optics (1 m/s with plane mirror optics).

The measurement signal frequency changes as the stage velocity changes. The E1709A ensures minimal phase processing errors as the frequency changes. The receiver also provides immunity to errors induced by changes in measurement signal power that occur due to small pitch, roll and yaw movements during stage motion. These features help provide the most accurate measurements under system motion. See the 10898A or 10897B datasheets for axis-board information.

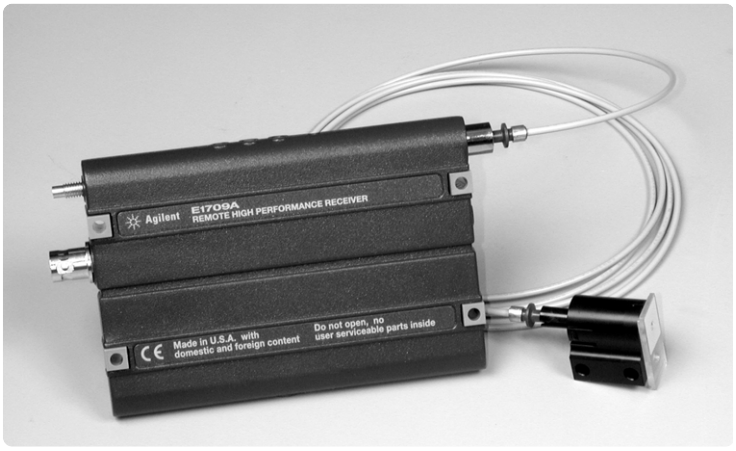

E1709A with Option 010

Specifications

Optical Input

Sensitivity (with option 010)

Beam Overlap	90%	50%	20%	10%
ac µw	0.20	0.26	0.46	0.80

Maximum Input
5 mW (Max sensitivity), 50 mW (Max attenuation)

Alignment Tolerance:
Roll: + 3°
Pitch/Yaw: + 1°
El709A is self-aligning when remote sensor is mounted to the following optics: Agilent 10715A, 10716A, 10717A, 10719A, 10721A, 10735A, or 10736A.

Electrical Output

Output Signal
Differential square wave at Doppler-shifted frequency, 100 kHz to 15.5 MHz (slew rates to 1 m/s with plane mirror optics)

Fixed Data Delay
33.2 ns (typical)
0.015 ns/°C (typical)

Errors due to frequency and amplitude variations*
± 1.2 nm for linear optics
± 0.6 nm plane mirror optics
± 0.3 nm for high res. Optics
* Up to maximum input, see above.

Signal Strength Monitor
0-10 volts proportional to optical input signal

General Information

Power Requirements
15 Vdc ± 1 V at less than 267 mA

Heat Dissipation
0 W for remote sensor
4 W typical for receiver

Temperature Range
0-40°C operating

Fiber-Optic Cable Lengths
(sold separately)
2 m plastic (option 010)
Consult factory for glass fiber or different lengths

Weight
190 g (6.7 oz.) for E1709A
26 g (0.9 oz.) for remote sensor with 2-m plastic cable

Recommended Cables

High Performance Receiver Cables
N1250A 5 meters
N1250B 10 meters
Use N1251A or B Laser head cable when using N1250A or B.

Options

010 2 m fiber and remote sensor (same as E1706A)
101 Operating Manual - English

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Comparison of Agilent E1708A/E1709A Receivers

Characteristic	E1709A Receiver	E1708A Receiver
Dynamic Range	25:1 to 6:1, depending on the AC/DC ratio	10:1
Sensitivity	.20 -.80 µW (depending on the AC/DC ratio), with 2 meter plastic cable	2.2 µW (E1708A with 2-meter fiber optic cable) 5 µW (10780F with 10-meter fiber optic cable)
Alignment Tolerance	For plastic fiber optic cable (Option 010) Roll: ±3˚ Pitch: ±1˚ Yaw: ±1˚ Agilent remote sensor is self-aligning with some interferometers.	For plastic fiber optic cable Roll: ±3˚ Pitch: ±1˚ Yaw: ±1˚ Agilent remote sensor is self-aligning with some interferometers.
Output Signal Frequency (Differential square wave at Doppler-shifted frequency)	100 kHz to 15.5 MHz (slew rates to 1 m/s with plane mirror optics)	100 kHz to 7.2 MHz (slew rate to 500 mm/s with plane mirror optics)
Fixed Data Delay (typical)*	33.2 ns (typical) 0.01 ns/˚C	86 ns
Errors due to frequency variations at fixed temperature*	For 25:1 to 6:1 input amplitude variations and frequency range of 100 kHz to 15.5 MHz < ±1.2 nm for linear optics < ±0.6 nm for plane mirror optics < ±0.3 nm for high resolution optics	For 3:1 input amplitude variations and frequency range of 100 kHz to 7.2 MHz < ±1.2 nm for linear optics < ±0.6 nm for plane mirror optics < ±0.3 nm for high resolution optics
Signal Strength Monitor	0 to 10 volts output, proportional to optical input signal power	0 to 8 volts output, proportional to optical input signal power
Power Requirements	15 Vdc ±1V at less than 267 mA	15 Vdc ±1V at less than 250 mA
Heat Dissipation	0.0 W for remote sensor 4.0 W typical for receiver	0.0 W for remote sensor 3.8 W typical for receiver
Temperature Range	0 to 40˚ C operating	0 to 40˚ C operating
Fiber-Optic Cable Length	Option 010: 2m (plastic) Contact Agilent for longer fiber optic cables.	2 m standard (plastic) Contact Agilent for longer fiber optic cables.
Weight	Receiver body:190 g Option 010: Remote sensor with 2 m cable: 26 g	Receiver body:170 g, Remote sensor with 2 m cable: 26 g
Dimensions	Height: 78.1 mm (3.075 in) Width: 115.6 mm (4.552 in) Depth: 19.8 mm (0.780 in)	Height: 78.1 mm (3.075 in) Width: 115.6 mm (4.552 in) Depth: 19.8 mm (0.780 in)
Dimensions (receiver body, mounting area)	4 holes at corners of a rectangle 40.0 mm (1.575 in) high 108.0 mm (4.250 in) wide, centered on receiver body centerline	4 holes at corners of a rectangle 40.0 mm (1.575 in) high 108.0 mm (4.250 in) wide, centered on receiver body centerline

* For ac input signal power:
E1708A: <200 µW
E1709A: <50 µW


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Configuring Your Laser System

Contact your local Agilent Technologies sales office for assistance in selecting the components needed for your application. The basic steps in configuring a system are:

First, determine your system specifications (accuracy, speed, resolution, number of axes).

Then select optics, electronics, laser head, and wavelength compensation components to meet your system requirements.

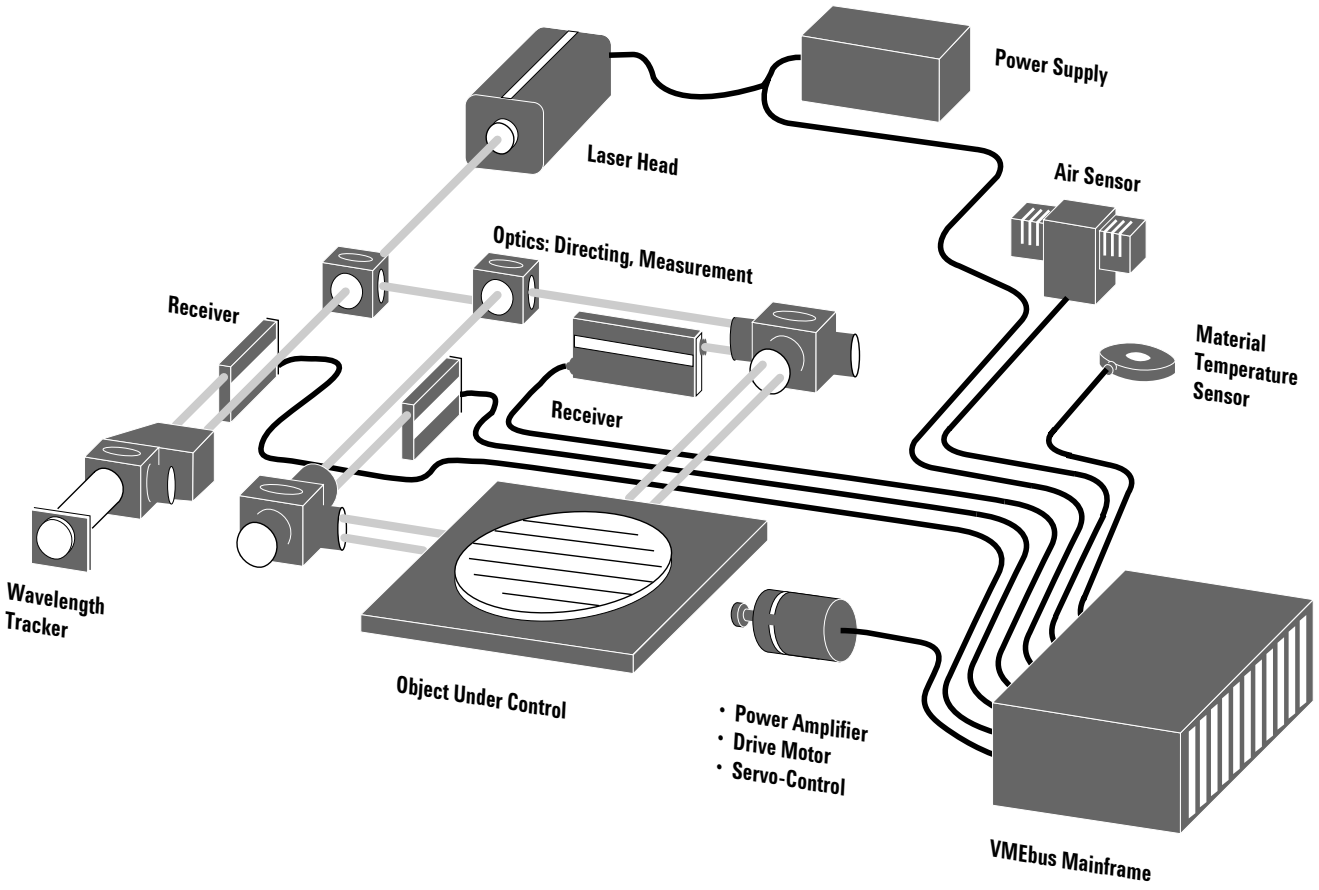

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent Technologies' Test and Measurement Support, Services, and Assistance
Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise
Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage
Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test and measurement needs

Online assistance:

www.agilent.com/find/assist

Phone or Fax:

United States:
(tel) 1 800 452 4844

Canada:
(tel) 1 877 894 4414
(fax) (905) 282-6495

China:
(tel) 800-810-0189
(fax) 1-0800-650-0121

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82-2) 2004-5004
(fax) (82-2) 2004-5115

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:
(tel) 080-004-7866
(fax) (886-2) 2545-6723

Other Asia Pacific Countries:
(tel) (65) 375-8100
(fax) (65) 836-0252
Email: tm_asia@agilent.com

Product specifications and descriptions in this document subject to change without notice.

Copyright © 1996-2001 Agilent Technologies, Inc.
Printed in USA, June 20, 2001
5965-1569E

Agilent Technologies

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP