ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Aaeon SBC-410* at our website: *Click HERE*

Our Products

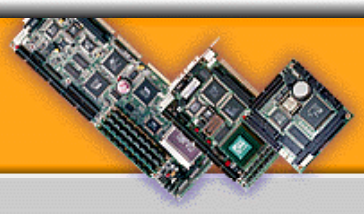

- News & Events
- Our Products
- Application & FAQ
- Support & Service
- About AAEON
- Worldwide Partners
- Job Opportunities
- Write Us



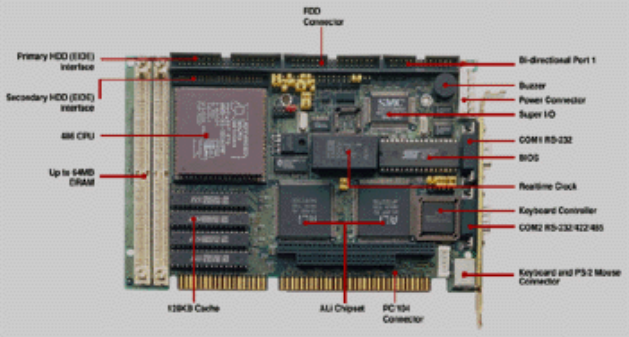

SBC-410

486 Half-size CPU Card

Features

- **Supports 486DX2/DX4/DX5, 5X86-133 CPUs**
- **Build-in 128KB L2 cache, up to 512KB**
- **System memory supports up to 64MB EDO DRAM**
- **Supports four enhanced IDE hard disk drives, two floppy drives**

Specifications

CPU	80486DX2/DX4/DX5, 5x86-133 MHz
BIOS	AMI Flash BIOS
Chipset	ALi M1487/1489
Bus interface	ISA Bus
System memory	1MB to 64MB, two 72-pin SIMM sockets. Supports FDD and FP DRAM.
Shadow RAM memory	Supports system and video BIOS shadow of up to 256KB in 32KB blocks.
DMA channels	7
Interrupt levels	15

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Enhanced IDE	Supports up to four IDE devices (ATA-2 bus) large hard disk drives or other enhanced IDE devices. Supports mode 3 and mode 4 hard disks (minimum data transfer rate of 11.1MB/sec).
FDD interface	Supports up to two floppy disk drives, 5.25" (360KB and 1.2MB) and/or 3.5?(720KB, 1.44 MB and 2.88MB).
Parallel port	One bi-directional parallel port. Supports SPP, ECP, and EPP.
Serial ports	One RS-232 and one RS-232/422/485 serial ports, jumper selectable. Both with 16C550 UARTs with 16-byte FIFO buffer.
Keyboard/mouse connector	6-pin mini-DIN keyboard and PS/2 mouse connector is located on the mounting bracket for easy access. An onboard keyboard 5-pin header connector is also available .
Watchdog timer	Can generate a system reset, IRQ15 or NMI. The time interval is software selectable from 2 sec to 128 min, 1 sec/step.
Power management	I/O peripheral devices support power saving and doze/standby/suspend modes. APM1.1 compliant.
PC/104 connector	104-pin connector for a 16-bit bus.
Power supply voltage	Single +5V (4.75V to 5.25V)
Max. power requiremen	+5V @ 2.5A
Operating temperature	32º to 140ºF(0º to 60ºC)
Board size	7.3"(L) x 4.8"(W) (185 mm x 122 mm)
Weight	0.23 kg

ISO 9001 Certification

ISO14001 Certification

CE

UL

FCC



Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP