

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent 86106A* at our website: ***Click HERE***

Probing High-speed Signals with the Agilent 86100 Series of Wide-bandwidth Sampling Oscilloscopes

Product Note 86100-6

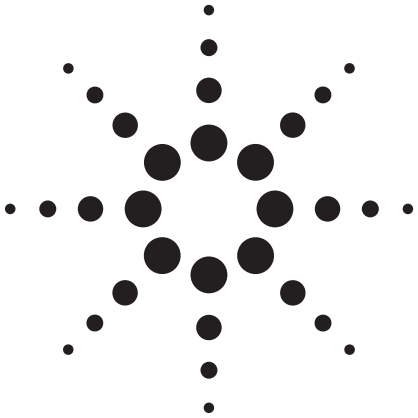

The high bandwidth and low noise of equivalent-time sampling oscilloscopes provide precise displays of high-speed signals. Historically, if the signal could not be routed to the oscilloscope through a high-quality cable, thus requiring the use of a probe, accurate measurements became difficult to achieve. Three important measurement accessories help make probe based measurements both simple and accurate for the Agilent 86100 Wide Bandwidth Oscilloscope:

- Agilent 113X, 115X, and 116X series of high performance probes with up to 13 GHz of bandwidth
- Agilent N1022A probe adapter
- Agilent 83496A clock recovery module



Agilent Technologies

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Probes

Agilent offers a wide variety of probes with the bandwidth and connectivity required for high-speed waveform analysis. These include differential and single-ended probes with solder in, socketed, SMA, and browsing probe heads offering variable spacing probe tips for today's high-density IC's and circuit boards. Typical bandwidths are available from 1.5 to 13 GHz (9/05). All probes have a flat frequency response over the entire probe bandwidth to eliminate distortion and frequency-dependent loading effects.

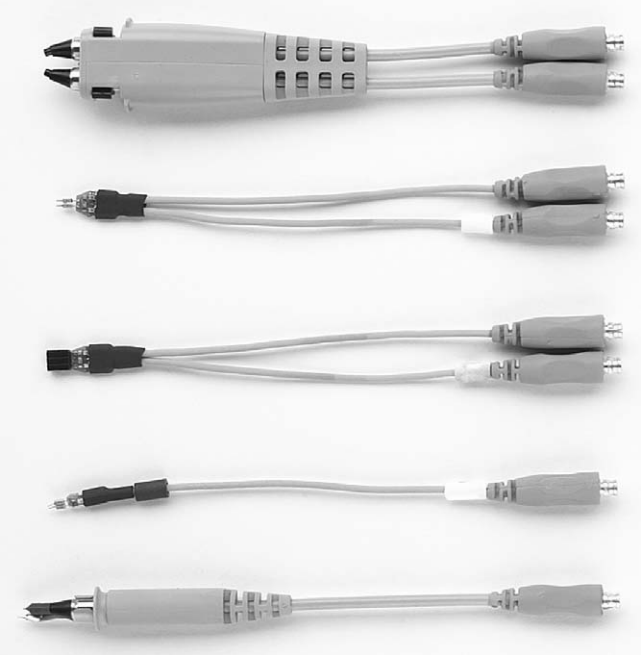


Figure 1: infiniimax probes

Connecting the probe to the oscilloscope

The precision 3.5 mm connector used for the electrical channels of several 86100 plug-in modules is not directly compatible with the standard probe interface of Agilent real-time sampling oscilloscopes. This problem is solved with the N1022A Probe Adapter. The N1022A Probe Adapter provides power, calibration, and a high-integrity signal path between the probe and the 861XX series plug-in module. The interface of the probe amplifier section attaches to one side of the adapter. The other side of the probe adapter is an instrumentation grade 3.5 mm connector that attaches to the bulkhead male 3.5 mm connector of the electrical channel of the oscilloscope plug-in module. For power and identification, an interface cable from the probe adapter attaches to the probe power port of the oscilloscope plug-in.

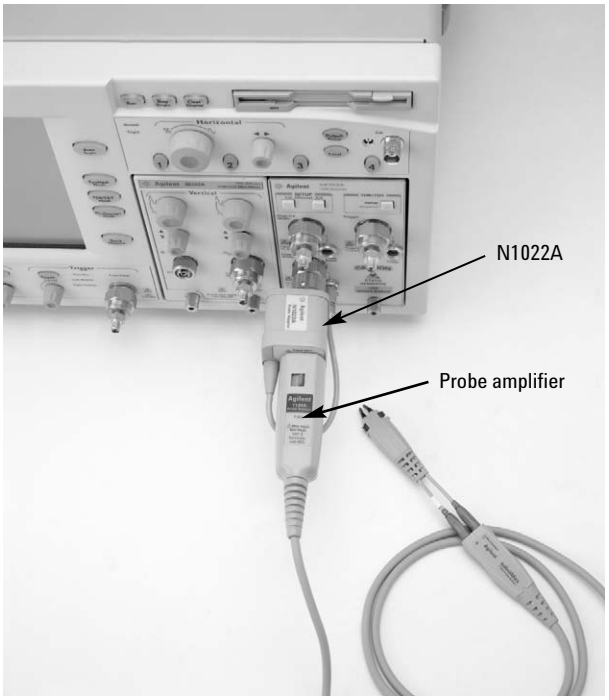


Figure 2: Connecting a probe through the N1022A adapter

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

The N1022A is directly compatible with the following modules:

86101A	86102A and U
86103A and B	86105A
86106A	86112A
83481A	83483A
83485A	83486A
83487A	54751A
54753A	54754A

The following plug-in modules have 2.4 mm compatible connectors. The 85130-60010 2.4 mm (f) to 3.5 mm bulkhead adapter is required in addition to the N1022A:

86106A	86106B
86109A	86109B
86116A	86116B
86117A	86118A
83484A	

(For non-oscilloscope applications, a type 'N' (m) to 3.5 mm bulkhead adapter (N1022-60014) is available. There is also a 3.5 mm (f) to 3.5 mm bulkhead adapter (85052-60034)).

The following plug-in modules do not have built-in probe power supplies. The Agilent 1143 power supply is used to provide probe power through the N1022A. (In this configuration an automatic gain and offset calibration is not available. A manual gain calibration can be performed to account for probe attenuation and signal splitting). The 01143-61602 probe power extension cable may be useful to allow the 1143 power supply to be located over 1 meter away from the oscilloscope or other instrument.

86105B
86105C
86116B
86117A
86118A

The 86100 oscilloscope mainframe has built-in calibration routines (except as noted above) to compensate for probe attenuation and offset to allow a direct display of the actual signal levels found at the probe tip. Very high frequency and small pitch probes such as the N5381A 12 GHz solder-in probe head are difficult to connect to the 86100 BNC calibration connector. The E2655B Deskew and Performance Verification fixture is recommended.

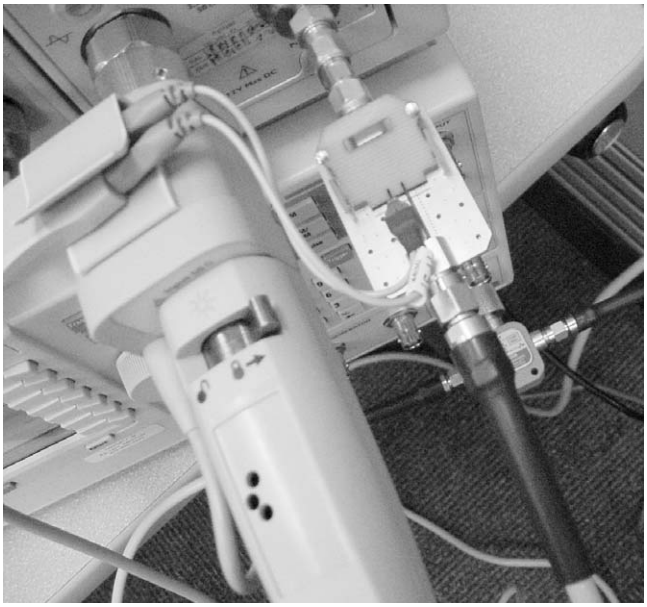


Figure 3: The E2655B Deskew and Performance Verification fixture allows for easy probe calibration with the 86100 DCA

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Triggering the oscilloscope with a clock extracted from the probed signal

Sampling oscilloscopes are different from real-time oscilloscopes in that they require a triggering signal other than the test signal itself. The triggering signal is often a clock that is synchronous to the signal under test. In a probing scenario, a separate system clock for triggering may not be present. When the necessary synchronous 'trigger' is not available, one solution is to derive a clock from the data being measured. This process is performed with the 83496A clock recovery module.

The N1022A and appropriate probe are connected to the 83496A input port where the signal is evenly split within the module (see Figure 4). Half is used for clock extraction; the other half is routed to the 83496A front panel and then connected to the input channel of the adjacent plug-in module. The 83496 will derive a clock from the data. The recovered clock signal rate is divided by eight and routed internally in the 86100 mainframe. The full rate clock or user selected rate divided clock is available at the 83496A front panel and can be useful as a trigger for eye diagram analysis when data pattern lengths are multiples of two. (A divided trigger with an even divisor yields an incomplete eye, see Product Note 86100-5). Above 7.1 Gb/s, the front panel recovered clock has a minimum divide ratio of two. The 83496A option 100 requires at least 150 mVpp at its input port to accurately perform clock extraction. If a 10:1 probe is used (such as the 1134A), the signal level at the probe tip must be greater than 1.5 Vpp. If a 3.45:1 probe is used (such as the 1169A), the signal level at the probe tip must be greater than 500 mVpp. Note however, that a proper probe calibration will compensate for both the probe attenuation and signal splitting within the 83496 and provide an accurate display of signal levels on the oscilloscope screen. (83496A option 101, without internal splitters, requires half the input signal of 83496A option 100 for clock extraction. Any signal splitting outside the module must be considered when determining system limits.)

The 83496A clock recovery module can derive a clock from NRZ signals with rates as low as 50 MB/s, as high as 13.5 Gb/s, and any rate between, providing the ultimate in flexibility and value. (As of 9/05 the data rate must be entered into the 83496 to allow it to properly synchronize to the signal being probed). As low as 300 femtoseconds rms, the residual jitter of the output clock is virtually negligible, allowing accurate measurements of very low levels of signal jitter. The 83496 can be configured with a tunable loop bandwidth. This critical feature allows the module to be operated as a "golden PLL" with the optimal loop bandwidth for whatever standard/data rate is being tested. Loop bandwidth will control what spectrum of jitter is observed and what is tracked out from eye-mask and jitter tests. For example, low frequency jitter can be removed, which is usually of low importance since system receivers easily tolerate it. Testing with an optimal loop bandwidth assures that good parts do not appear to be bad, and bad parts do not appear to be good. For more information on the use of clock recovery loop bandwidth, refer to product note 86100-5 "Triggering Wide-bandwidth Sampling Oscilloscopes for Accurate Displays of High-speed Digital Communications Waveforms".

The following configurations for the 83496A are available:

Option 100: Electrical differential or single-ended clock recovery 50 Mb/s to 7.1 Gb/s. The input signal is internally split and ~50% routed back out to the measurement channel of the adjacent plug-in module. When measuring differential signals, the most convenient technique is to use a differential probe tip, rather than provide two input signals to the 83496A. The probe provides a single-ended signal to the 83496/861XX channel representative of the difference between the signals at the two probe tips. The 83496A Option 101 electrical/optical clock recovery module is not recommended for probing as it does not have an internal signal divider. It can be used, but requires an external power divider that precludes the installation of the N1022A on the front of the clock recovery module. A complicated adapter scheme is required. See below.


Special Option 101-H05: This special option version of the electrical/optical clock recovery module integrates the signal splitting within the module. Use for electrical signals is similar to Option 100. No special adapters other than the N1022A are required.

Option 200: Increase operating range to 50 Mb/s to 13.5 Gb/s. Available for either Option 100 or Option 101 configurations. When measuring clocks, rates from 25 MHz to 7.75 GHz are allowed.

Option 300: Add golden PLL (tunable loop bandwidth capability). Loop bandwidth is tunable from 30 KHz to over 10 MHz. (Without Option 300, the loop bandwidth can be configured at two discrete settings, dependent upon data rate).

Option 200 and 300 can also be added at a later date. The module must be returned to an Agilent service center for the upgrade.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

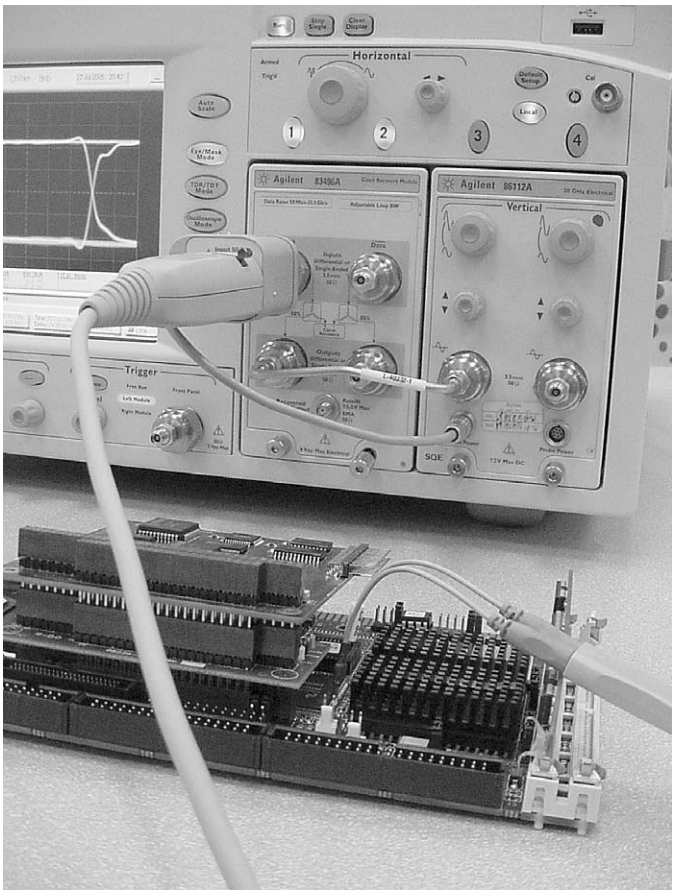

Probe calibration procedures

The 86100 DCA has a built-in calibration process to compensate for probe attenuation and offsets. The probe calibration is achieved by attaching the probe tip to a known DC signal that is available from the oscilloscope mainframe. The process is **Calibration/All calibrations/CH 'X' Probe compensation** (for the channel the 83496 output is routed to.).

For probe compensation with plug-in modules that do not include a probe supply outlet (86105B, 86105C, 86117A, 86118A) the calibration procedure is similar. However, if there is a voltage offset, it must be compensated for manually (**Setup/Channels/Channel X/Advanced** with the attenuation factor adjusted to account for signal loss in splitting and/or probe voltage division).

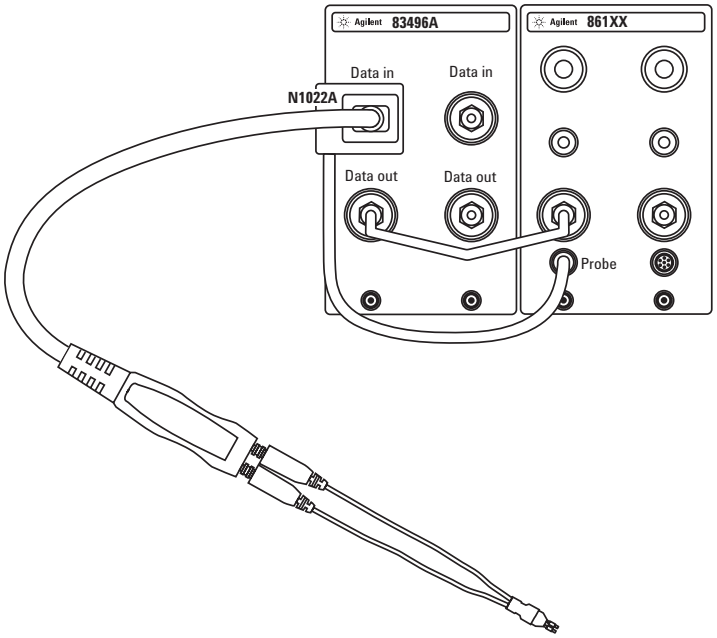



Figure 4: Connector scheme using the 83496A and N1022A

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Probing configuration when using the optical/electrical configuration of the 83496A (Option 101)

The primary usage of the 83496A Option 101 is for extracting clocks from optical signals. However, electrical inputs are provided to derive a clock from an electrical signal. Unlike 83496A Option 100 or special Option 101-H05, there are no internal dividers to tap the electrical signal and pass it to a measurement channel. If an electrical signal is to provide a trigger and be simultaneously observed, it must be divided before entering the 83496.

In a probing scenario, the chain of adapters required to connect a probe and probe adapter becomes complex including the N1022A probe adapter, an N1022A-60014 bulkhead to N adapter, an 11636A N-type power divider, a second N1022-60014 bulkhead to N adapter, and a 1250-1250 N to SMA adapter. Although the 01143-61602 probe power extension cable is long at 1.5 meters in length, it may be useful to provide some flexibility in assembling the adapter chain and connecting the N1022A to the adjacent plug-in channel probe power.

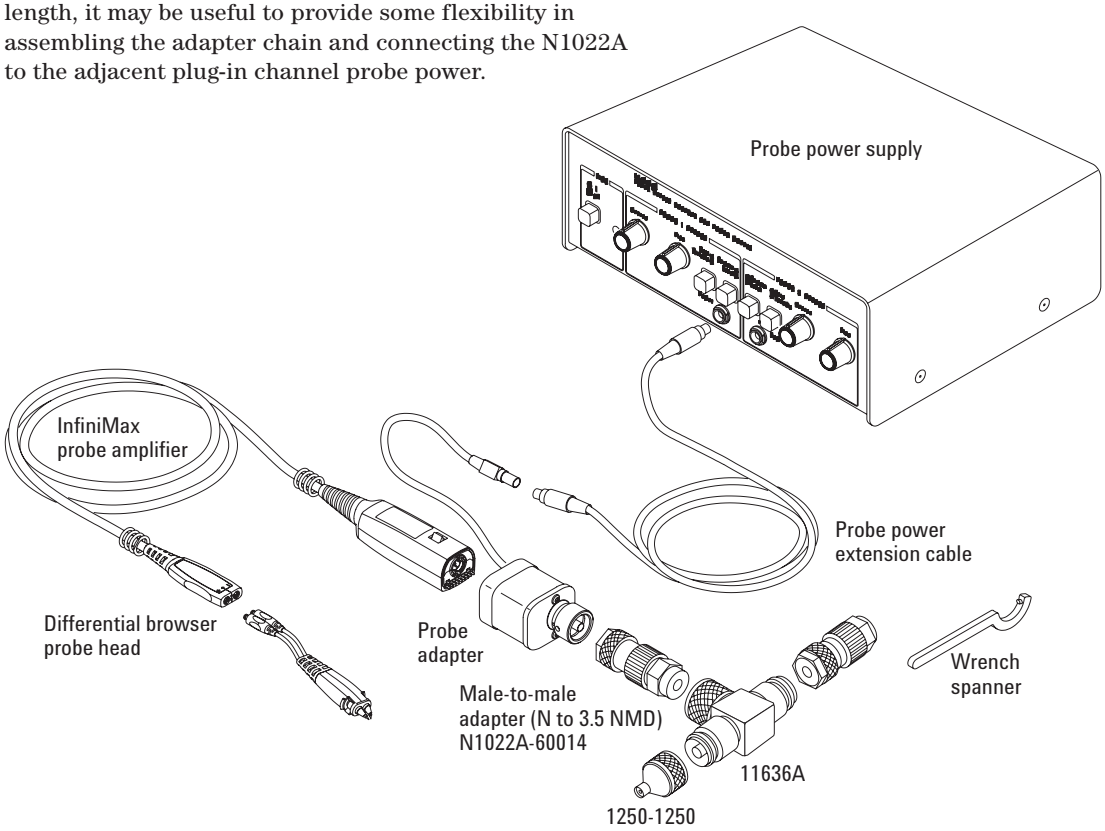

Adapting and splitting signals for probing and clock extraction with the 83496A option 101

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

www.agilent.com
www.agilent.com/find/dca

Agilent Technologies' Test and Measurement Support, Services, and Assistance
Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise
Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

Your Advantage
Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.



Agilent Open

www.agilent.com/find/open
Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

United States:
(tel) 800 829 4444
(fax) 800 829 4433
Canada:
(tel) 877 894 4414
(fax) 800 746 4866
China:
(tel) 800 810 0189
(fax) 800 820 2816
Europe:
(tel) 31 20 547 2111
Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840
Korea:
(tel) (080) 769 0800
(fax) (080)769 0900
Latin America:
(tel) (305) 269 7500
Taiwan:
(tel) 0800 047 866
(fax) 0800 286 331
Other Asia Pacific Countries:
(tel) (65) 6375 8100
(fax) (65) 6755 0042
Email: tm_ap@agilent.com
Contacts revised: 05/27/05

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus



Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2005

Printed in USA, October 24, 2005
5989-3854EN



Agilent Technologies

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP