ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent 89441A* at our website: *Click HERE*

Agilent 89441A

Vector Signal Analyzer dc to 2.65 GHz

Data Sheet

Definitions

Analog demodulation mode = Measurements with AM, PM, and FM demodulation capabilities.

Baseband = dc to 10 MHz measurements.

Baseband time = Time-domain measurements selected by setting start frequency to exactly 0 Hz or choosing full span in 0 to 10 MHz measurements.

dBc = dB relative to input signal level.

dBfs = dB relative to full scale amplitude range setting. Full scale is approximately 2 dB below ADC overload.

FS or fs = Full scale; synonymous with amplitude range or input range.

RBW = Resolution bandwidth.

RF = 2 MHz to 2.65 GHz measurements.

Scalar mode = Measurements with only frequency-domain analysis available. Frequency spans up to 2648 MHz.

SNR = Signal to noise ratio.

Vector mode = Measurements with frequency- and time-domain capabilities. Frequency spans up to 10 MHz in baseband, and 7 MHz for RF analysis (8 MHz with Option 89441A-AYH).

Zoom time = Time-domain measurements selected by setting frequency parameters using center frequency and span values.

Introduction

Specifications describe warranted performance over the temperature range of 0° to 45°C (except where noted) and include a 30-minute warm-up from ambient conditions, automatic calibrations enabled, auto-zero on, time domain calibration off, and anti-alias filter in, unless noted otherwise. Supplemental characteristics identified as “typical” or “characteristic” provide useful information by giving non-warranted performance parameters. Typical performance is applicable from 20° to 30°C. When enabled, automatic calibrations are periodically performed to compensate for the effects of temperature and time sensitivities. During the calibration, no signals > 0 dBm should be connected to the front panel inputs.

Feature summary

Frequency

dc to 2.650 GHz
51 to 3201 points
Center frequency signal-tracking

Instrument modes

Scalar (frequency-domain only)
Vector (amplitude and phase information in frequency and time domain and also time gating)
Analog demodulation (AM/FM/PM)

Sweep types

Continuous
Single
Manual

Agilent Technologies

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – feature summary

Triggering
Free run
Input channel
IF channel
Internal source
GPIB
Trigger holdoff
External
External arm
Programmable polarity and level
Pre and post delay

Averaging
Video
Video exponential
Time
Time exponential
Peak hold
Simultaneous display of instantaneous and average spectrum

Source types
CW
Random noise
Periodic chirp
Arbitrary (up to 8192 points)

Input
One channel
Second 10 MHz input channel (optional)
Auto-ranging (baseband only)
Overload indicators
50/75/1M Ω BNC (dc to 10 MHz)
50 Ω Type-N, 75 Ω with minimum-loss pad (2 MHz to 2650 MHz)

Resolution/window shapes
1-3-10 bandwidth steps
Arbitrary RBW
Windows: Flat-top (high amplitude accuracy), Gaussian-top (high dynamic range), Hanning (high frequency resolution), Uniform
Detectors: normal, positive peak, sample

Measurement data
Spectrum
PSD
Main time
Gate time
Math function
Data register
Auto correlation
Time capture
Frequency response, coherence, cross spectrum, and cross correlation (with second 10 MHz input channel)
Instantaneous spectrum

Data format
Log magnitude
Linear magnitude
Phase (wrap or unwrap)
Real part
Imaginary part
Group delay
Log/linear x-axis

Trace math

Display

1, 2, or 4 grids
1 to 4 traces displayed (single or overlay)
Auto-scaling
Color (user definable)
User trace title and information
Graticule on/off
Data label blanking
X-axis scaling
Instrument/Measurement state displays
External monitor

Markers
Marker search: Peak, next peak, next peak right, next peak, left, minimum
Marker to: Center frequency, reference level, start frequency, stop frequency
Offset markers
Couple markers between traces
Marker functions: Peak track, frequency counter, band power (frequency, time, or demodulation results), peak/average statistics

Memory and data-storage
Disk devices
Nonvolatile RAM disk (100 Kbyte)
Volatile RAM disk (up to 20 Mbyte)
90 mm (3.5-inch) 1.44 Mbyte flexible disk (LIF or MS-DOS® formats)
External GPIB disk
Disk format and file delete, rename, and copy
Nonvolatile clock with time/date
Save/recall of: Trace data, instrument states, trace math functions, Instrument BASIC program, time-capture buffers

Online help
Hard copy output
GPIB/HPGL plotters
GPIB/RS-232/parallel printers
Plot to file
Time stamp
Single-plot spooling

Interfaces
GPIB (IEEE 488.1 and 488.2)
External reference in/out
External PC-style keyboard
Active probe power
RS-232 (one port)
Centronics
LAN and second GPIB

Standard data format utilities

Optional features
Second 10 MHz input channel (Option 89441A-AY7)
Extend time capture to 1 MSample (Option 89441A-AY9)
Internal RF source (Option 89441A-AY8)
Instrument BASIC (Option 89441A-1C2)
Vector modulation analysis (Option 89441A-AYA)
Digital video modulation analysis (Option 89441A-AYH)
Waterfall and spectrogram (Option 89441A-AYB)
Advanced LAN support (Option 89441A-UG7)
3GPP W-CDMA analysis, includes code domain power (Option 89441A-080)
W-CDMA code domain power for exper. sys. (Option 89441A-B73)
ARIB 1.0-1.2 W-CDMA analysis (Option 89441A-B79)
Enhanced data rates for GSM evol. (EDGE) (Option 89441A-B7A)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – RF

RF specifications apply with the receiver mode set to "RF section (2–2650 MHz)."

Frequency

Frequency tuning

Frequency range	2 MHz to 2650 MHz
Frequency span	
Scalar mode	1 Hz to 2648 MHz
Vector mode	1 Hz to 7 MHz (8 MHz with Option 89441A-AYH)
Center frequency tuning resolution	0.001 Hz
Number of frequency points/span	51 to 3201

Signal track (when enabled) keeps the largest measured signal at the center frequency.

Frequency accuracy (with standard high-precision frequency reference)

Frequency accuracy is the sum of initial accuracy, aging, and temperature drift.

Initial accuracy	±0.1 ppm
Aging	±0.015 ppm/month
Temperature drift	±0.005 ppm (0° to 55°C)


Frequency counter

The frequency counter operates in scalar or vector mode.

Frequency counter accuracy:
Total accuracy is the sum of the frequency counter's basic accuracy and the instrument's frequency accuracy.

Conditions/exceptions:

- Signal-to-noise ratio within resolution bandwidth, 20 dB minimum
- Marker within ½ resolution bandwidth of peak
- Unspecified for uniform window and resolution bandwidth < 5 Hz

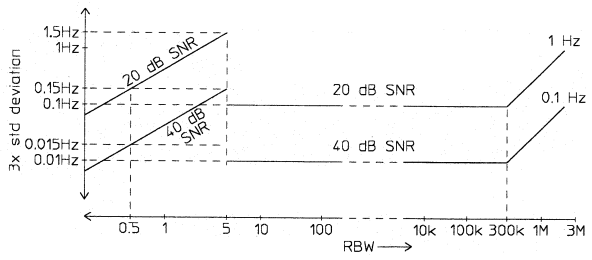

Frequency counter basic accuracy

Stability (spectral purity) (with standard high-precision frequency reference or equivalent with ≥ 5 dBm level)

Phase noise (absolute and residual):

$F_{in} \leq 200$ MHz

100 Hz offset	< –103 dBc/Hz
1 kHz offset	< –112 dBc/Hz
≥ 10 kHz offset	< –116 dBc/Hz

200 MHz ≤ F_{in} ≤ 1 GHz


100 Hz offset	< –96 dBc/Hz
1 kHz offset	< –104 dBc/Hz
≥ 10 kHz offset	< –116 dBc/Hz

1 GHz ≤ F_{in} ≤ 2650 MHz

100 Hz offset	< –87 dBc/Hz
1 kHz offset	< –97 dBc/Hz
≥ 10 kHz offset	< –116 dBc/Hz

LO spurious sidebands

Offset > 1 kHz	< –75 dBc
Offset ≤ 1 kHz	
$f_{in} \leq 2$ GHz	< –70 dBc
$f_{in} > 2$ GHz	< –68 dBc

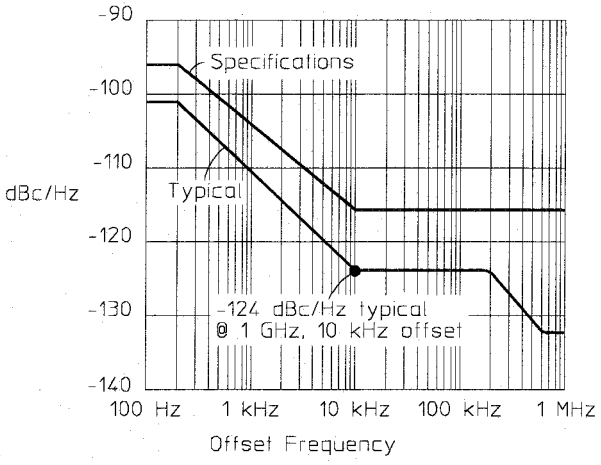

Spectral purity at 1 GHz

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – RF

Resolution bandwidth

Range 312.5 µHz to 3 MHz in 1, 3, 10 sequence or arbitrary user-definable bandwidth

Note: In scalar mode, the minimum resolution bandwidth is 312.5 µHz and the maximum resolution bandwidth is a function of span. In vector mode, the minimum resolution bandwidth is a function of span and the number of frequency points, and the maximum resolution bandwidth is a function of span only.

Window	Selectivity[1]	Passband flatness	Sideband level
Flat-top	2.45:1	+ 0, –0.01 dB	–95 dBc
Gaussian-top	4.0:1	+ 0, –0.68 dB	–125 dBc
Hanning	9.1:1	+ 0, –1.5 dB	–32 dBc
Uniform	716:1	+ 0, –4 dB	–13 dBc

1. Shape factor or ratio of –60 dB to –3 dB bandwidths.

Amplitude

Input range –50 dBm to +25 dBm (5 dB steps)

Maximum safe input power

- Average continuous power: +25 dBm (300 mW)
- DC voltage: 25 V

A/D overload level (typical): > 1.5 dB above range

Input port

Input channels: 1

- VSWR
  - Range ≥ – 20 dBm: 1.6:1 (12.7 dB return loss)
  - Range ≤ –25 dBm: 1.8:1 (11 dB return loss)

Impedance: 50 Ω (75 Ω with minimum-loss pad Option 89441A-1D7)

Connector: Type-N

Amplitude accuracy

Accuracy specifications apply with flat-top window selected. Amplitude accuracy is the sum of absolute full-scale accuracy and amplitude linearity.

Absolute full-scale accuracy (with signal level equal to range)

	20° – 30°C	0° – 55°C
≥ –25 dBm range	±1 dB (0.5 dB typical)	±2 dB
≤ –30 dBm range	±1.5 dB (0.5 dB typical)	±3 dB

Amplitude linearity

- 0 to –30 dBfs: < 0.10 dB
- –30 to –50 dBfs: < 0.15 dB
- –50 to –70 dBfs: < 0.20 dB

In vector mode, relative level accuracy within a single span is the sum of vector mode frequency response and amplitude linearity.

Vector mode frequency response (relative to the center frequency): ±0.4 dB

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – RF

Dynamic range

Dynamic range indicates the amplitude range that is free of erroneous signals within the measurement bandwidth.

Harmonic distortion (with a single full scale signal at the input)

≥ –25 dBm range	< –75 dBc
≤ –30 dBm range	< –54 dBc

Third-order intermodulation distortion (with two input tones at 6 dB below full scale and ≥ 10 MHz) < –75 dBc

General spurious (with input signal level equal to range and input frequency ≤ 2650 MHz)

For spans ≤ 1.5 MHz and for offset frequencies ≤ .5 MHz from input signal	< –75 dBc
For all spans and offsets	<–70 dBc[1]

Residual responses (50 Ω input) <–80 dBfs

Input noise density (50 Ω input, vector mode or scalar mode with sample detector)[2]

	20°– 30°C	0° – 55°C
≥ –25 dBm range	< –115 dBfs/Hz	< –112 dBfs/Hz
≤ –30 dBm range	< –110 dBfs/Hz	< –109 dBfs/Hz
Sensitivity[2]		
–50 dBm range	< –160 dBm/Hz	< –159 dBm/Hz

Phase (vector mode)

Phase specifications apply with flat-top window selected.

Deviation from linear phase (relative to best fit line with peak signal level within 6 dB of full scale): ±5 deg

Time (vector mode)

Time-sample resolution = 1/(k*span(Hz)) [second]; where k = 1.28 for zoom time.

Main time length = (number of frequency points – 1) ÷ span (Hz) [second]; for resolution bandwidth in arbitrary and auto-coupled mode.

Amplitude accuracy (for a sine wave in the measurement passband, time-domain calibrations on, range ≥ –25 dBm)

20° – 30°C	±12% full scale (±6% typical)
0° – 55°C	±26% full scale

Sample error rate for zoom time (typical)

Error threshold: 10^{-8} times/sample 5% full scale

Sample error rate reflects the probability of an error greater than the error threshold occurring in one time sample.

1. < -60 dBc for RF (2-2650 MHz)-wide (Option 89441A-AYH)
2. Add 4 dB for RF (2-2650 MHz)-wide (Option 89441A-AYH)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – RF

Analog demodulation

Demodulation specifications apply with demodulation mode selected and time-domain calibration on.

AM, PM, or FM demodulation. Auto carrier locking is available with PM or FM demodulators and the carrier value determined is a displayable marker function.

Demodulator bandwidth (determined by selected measurement span)

Maximum bandwidth 7 MHz (typical)

AM demodulation (typical performance)

Accuracy	±1%
Dynamic range	60 dB (100%) for a pure AM signal
Cross demodulation	< 0.3% AM on an FM signal with 10 kHz modulation, 200 kHz deviation

PM demodulation (typical performance)

Accuracy	±3 degrees
Dynamic range	60 dB (rad) for a pure PM signal
Cross demodulation	< 1 degree PM on an AM signal with 80% modulation

FM demodulation (typical performance)

Accuracy	±1% of span
Dynamic range	60 dB (Hz) for a pure FM signal
Cross demodulation	< 0.5% of span FM on an AM signal with 80% modulation

Trigger

Trigger types

Scalar mode	Free run, internal source, GPIB, external (each measurement step requires a separate trigger)
Vector mode	Free run, IF channel, internal source, GPIB, external

Pre-trigger delay range (see time specifications for sample resolution)

One channel	64 Ksamples (1 Msample with extended time capture, Option 89441A-AY9)
Two channels (requires second 10 MHz input, Option 89441A-AY7)	32 Ksamples (0.5 Msample with extended time capture, Option 89441A-AY9)

Post-trigger delay range (see time specifications for sample resolution)	2 Gsample

Trigger holdoff

When enabled, each measurement requires two trigger events. The first event starts a holdoff timer. After the specified holdoff time, a subsequent trigger event will initiate a measurement.

Holdoff resolution	2.5 µs
Holdoff range	2.5 µs to 41 s

IF trigger (characteristics only)

Used to trigger only on in-band energy, where the trigger bandwidth is determined by the measurement span (rounded to the next higher $10^7/2^n$ [Hz]).

Amplitude resolution	< 1 dB
Amplitude ranges	+1 to –70 dBfs. Usable range will become limited by the total integrated noise in the measurement span.
IF trigger hysterysis	< 4 dB

External trigger (positive and negative slope)

Level accuracy	±0.5 V
Range	±5 V
Input impedance	10 kΩ (typical)

External arm

Level accuracy	±0.5 V

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Range	±5 V
Input impedance	10 kΩ (typical)

Source (requires internal RF source Option 89441A-AY8)

Source types[1] (vector mode): CW (fixed sine), random noise, periodic chirp, arbitrary

Frequency

Range	2 MHz to 2650 MHz
Maximum offset from center frequency	3.5 MHz

Amplitude (fixed sine source type)

Amplitude range	–40 dBm to +13 dBm
Typical maximum amplitude (overdrive is available using direct numeric entry)	+17 dBm
Amplitude resolution	0.1 dB

Amplitude accuracy (source level ≤ 13 dBm)

Source amplitude accuracy is the sum of absolute accuracy at the center frequency (zero offset frequency) and the IF flatness.

	20° – 30°C	0°– 55°C
Absolute accuracy at the center frequency	±1.2 dB	±3.5 dB
IF flatness (relative to center frequency)	±1dB	±1.5 dB
IF Flatness with |offset frequency| ≤ 500 kHz		±0.3 dB

Dynamic range (source level ≤ 0 dBm)

Harmonic distortion	< –40 dBc
Non-harmonic spurious (within measurement bandwidth)	< –40 dBc
Average noise level (for offsets > 1 MHz from the carrier and carrier frequency > 100 MHz. For offsets < 1 MHz, add the LO phase noise.)	< –120 dBc/Hz
Crosstalk (source-to-receiver, source level ≤ 0 dBm)	–80 dBfs

Source port

VSWR	
Level ≤ –10 dBm	1.8:1 (11 dB return loss)
Impedance	50 Ω (75 Ω with optional minimum-loss pad)
Connector	Type-N

1. See baseband section for random noise, periodic chirp, and arbitrary source characteristics.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – baseband

Baseband specifications apply with the receiver mode set to “IF section (0–10 MHz)” or “RF section (0–10 MHz)” unless noted otherwise. Specifications noted as “IF section only” apply with the receiver mode set to “IF section (0–10 MHz)” and the input signal connected directly to the IF section’s channel 1 or channel 2 input.

Frequency

Frequency tuning (characteristic only)

Frequency range	dc to 10 MHz
Frequency span	1.0 Hz to 10 MHz
Center frequency tuning resolution	0.001 Hz
Number of frequency points/span	51 to 3201

Signal track (when enabled) keeps the largest measured signal at the center frequency.

Frequency accuracy

Same as the RF specifications.

Frequency counter

Same as the RF specifications.

Stability (spectral purity)

Absolute and residual phase noise, F_{in} = 10 MHz (with standard high precision frequency reference or equivalent)

100 Hz offset	< –106 dBc/Hz
1 kHz offset	< –110 dBc/Hz
≥ 10 kHz offset	< –120 dBc/Hz

Phase noise decreases with decreasing input frequency by 20 $\log_{10}(F_{in}/10\ MHz)$ dB

Resolution bandwidth

Same as the RF specifications.

Amplitude

Input range (characteristic only) (2 dB steps)

50 Ω input	–30 dBm to +24 dBm
75 Ω input	–31.761 dBm to +22.239 dB
1 MⓍ input	–30 dBm to +28 dBm

(referenced to 50 Ω)

Maximum safe input power

50 Ω/75 Ω input	+27 dBm
1 MΩ input	20 V peak

Auto-ranging (characteristic only)

Up-only, up-down, single, off

Input port

Input channels	1 (second 10 MHz input channel optional)
Return loss (IF section only)	
50 Ω input	> 25 dB
75 Ω input	> 20 dB
Coupling	dc/ac (ac coupling attenuation < 3 dB at 3 Hz)
Input impedance (IF section only)	50/75 Ω, 1 MΩ ±2% (< 80 pF shunt capacitance)
Connector	BNC (RF section: type-N)

Amplitude accuracy

Accuracy specifications apply with flat-top window selected. Amplitude accuracy is the sum of absolute full-scale accuracy and amplitude linearity.

Absolute full-scale accuracy (IF section only, with signal level equal to range)	±0.5 dB
Amplitude linearity	
0 to –30 dBfs	< 0.10 dB
–30 to –50 dBfs	< 0.15 dB
–50 to –70 dBfs	< 0.20 dB
Residual dc (50 Ω)	< –25 dBfs

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – baseband

Dynamic range


Dynamic range indicates the amplitude range that is free of erroneous signals within the measurement bandwidth.

Harmonic distortion (with a single full scale signal at the input)

2nd	< –75 dBc (–80 dBc typical)
3rd, 4th, 5th	< –75 dBc (–85 dBc typical)

Intermodulation distortion (with two input tones at 6 dB below full scale)

Second-order	< –75 dBc (–80 dBc typical)
Third-order	< –75 dBc (–85 dBc typical)

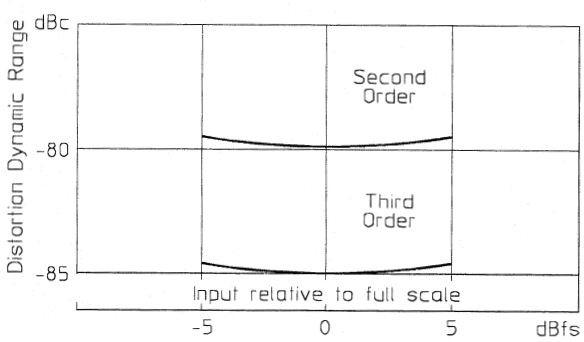

Typical harmonic and intermodulation distortion

Residual (spurious) responses (IF section only) (50 Ω input and front panel connections to RF section disconnected)

Frequencies < 1 MHz	< –75 dBfs or < –100 dBm whichever is greater
Frequencies ≥ 1 MHz	< –80 dBfs

Alias responses (for a single out-of-band tone at full scale) < –80 dBfs

Input noise density (50 Ω input, vector mode or scalar mode with sample detector)

1 kHz to 40 kHz	< –101 dBfs/Hz
40 kHz to 10 MHz	< –114 dBfs/Hz (–118 dBfs/Hz typical)

Sensitivity (–30 dBm range, 50 ⊗ input, vector mode or scalar mode with sample detector)

1 kHz to 40 kHz	< –13l dBm/Hz
40 kHz to 10 MHz	< –144 dBm/Hz (–148 dBm/Hz typical)

Crosstalk (source-to-input or channel-to-channel, 50 Ω terminations) < –85 dBfs

Phase (vector mode)

Phase specifications apply with flat-top window selected.

Deviation from linear phase (relative to best fit line with peak signal level within 6 dB of full scale) ±5 degrees

Time (vector mode)

Time-sample resolution = 1/(k*span(Hz)) [second]; where k = 1.28 for zoom time, 2.56 for baseband time measurements.

Main time length = (number of frequency points – 1) ÷ span (Hz) [second]; for resolution bandwidth in arbitrary and auto-coupled mode.

Amplitude accuracy (IF section only) (for a sinewave in the measurement passband, time-domain calibrations on) ±5% full scale

Sample error rate for zoom time (typical)

Error threshold: 10^{-8} times/sample
5% full scale

Sample error rate reflects the probability of an error greater than the error threshold occurring in one time sample.

Analog channel-to-channel time skew (IF section only) (time-domain calibrations on,both channels on the same range) < 1 ns

Analog demodulation

Same as RF analog demodulation specifications except as noted below.

Demodulator bandwidth (determined by selected measurement span)

Maximum bandwidth 10 MHz (typical)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – baseband

Two-channel

The second 10 MHz input channel (Option 89441A-AY7) provides additional measurements, including frequency response, coherence, cross spectrum, and cross correlation. These measurements are made by comparing a signal on channel two to a signal on channel one or to a demodulated signal on the RF input.

Channel match	±0.25 dB, ±2.0 degrees

(IF section only, at the center of the frequency bins, dc coupled, 16 rms averages, frequency response, full scale inputs, both inputs on the same range. Exclude the first 5 bins of the dc response.)

Trigger

Same as RF trigger specifications with the following additional specifications.

Input channel trigger (positive and negative slope)

Level accuracy	±10% full scale
Range	±110% full scale
Resolution	Full scale/116 (typical)

Source (with output filter on)

Source types

Scalar mode	CW (fixed sine), arbitrary
Vector mode	CW, random noise, periodic chirp, arbitrary

Random noise source % of energy in-band (Span = 10 MHz/2^N, N = 1 to 24)	> 70%
Periodic chirp source % of energy in-band	> 85%

Frequency

Frequency range	dc to 10 MHz
Frequency resolution	25 µHz

Amplitude

Source level

CW and random noise	–110 dBm to +23.979 dBm (50 Ω), 5.0 Vpk maximum
Periodic chirp and arbitrary	–110 dBm to + 19.542 dBm (50 Ω), 3.0 Vpk maximum
DC offset	±3.42 V maximum (resolution and range of programmable dc offset is dependent on source amplitude)

Amplitude accuracy (50 Ω, fixed sine)
(IF section only)

–46 dBm to +24 dBm	±1.0 dB
–56 dBm to –46 dBm	±2.0 dB

Harmonic and other spurious products (fixed sine, 0 V dc offset)

dc to 10 kHz	< –55 dBc
10 kHz to 5 MHz	< –40 dBc
5 MHz to 10 MHz	< –33 dBc

Source port

Return loss (IF section only)	> 20 dB
Source impedance	50/75 Ω

Arbitrary source characteristics

The arbitrary source repetitively outputs data stored in a data register. The data register may contain a single time record or, with Option 89441A-AYB, a trace buffer. The time length of the register depends on the time-sample resolution for the span entered when the data register was saved or created. See time specifications for time-sample resolution details.

Arbitrary source length

Single time record	Up to 4096 complex or 8192 real points.
Trace buffer (Requires Option 89441A-AYB)	Up to 16,384 real or complex points. Some configurations allow up to 32,768 real or complex points (see the *Operator's Guide* for details)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – general

Safety and environmental

Safety standards	CSA certified for electronic test and measurement equipment per CSA C22.2, No. 231
This product is designed for compliance to	UL1244 and IEC348, 1978
Acoustics	LpA < 55 dB typical at 25°C ambient (temperature controlled fan to reduce noise output)
Temperature	
Operating	0° to 45°C
Internal disk operations	4° to 40°C
Storage (no disk in drive)	–20° to 60°C
Humidity, non-condensing	
Operating	10% to 85% at 40°C
Internal disk operations	20% to 80% at 30°C
Storage (no disk in drive)	10% to 85% at 40°C
Altitude	
Operating (above 2285 m [7,500 ft], derate operating temperature by –3.6°C/1000 m [–1.1°C/1000 ft])	4600 m (15,000 ft)
Storage	4600 m (15,000 ft)
Calibration interval	1 year
Warm-up time	30 minutes
Power requirements	
115 VAC operation	
IF section	90 – 140 Vrms, 47 – 440 Hz
RF section	90 – 140 Vrms, 47 – 63 Hz
230 VAC operation	198 – 264 Vrms, 47 – 63 Hz
Maximum power dissipation	
IF section	750 VA
RF section	275 VA

IEC 801-3 (radiated immunity) performance degradation may occur at severity level 2.

Physical

Weight	IF section	21 kg (46 lb)
	RF section	25 kg (55 lb)
Dimensions		
IF section	Height	230 mm (9.1 in)
	Width	426 mm (16.7 in)
	Depth	530 mm (20.9 in)
RF section	Height	187 mm (7.4 in)
	Width	426 mm (16.7 in)
	Depth	525 mm (20.7 in)

Real time bandwidth (characteristics only)

Real-time bandwidth is the maximum frequency span that can be continually analyzed without missing any time segment of the input signal.

Frequency spans of $10^7/2^n$ Hz, arbitrary auto-coupled resolution bandwidth, markers off, one display trace with calculations off on other traces, and maximum frequency points equal to number of frequency points.

Averaging off

Single-channel vector mode (log magnitude spectrum measurement data, 1601 frequency points, channel 2 off, averaging off)	78.125 kHz, 60 updates/second
Two-channel vector mode (requires second 10 MHz input channel, Option 89441A-AY7) (Log magnitude frequency response measurement data, 801 frequency points, averaging off)	39.0625 kHz, 60 updates/second

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – general

Averaging

Single-channel vector mode averaging (log magnitude spectrum measurement data, 1601 frequency points, channel 2 off)

Fast average	78.125 kHz
Displayed	78.125 kHz, 48 updates/second

Two-channel vector mode averaging (requires second 10 MHz input channel, Option 89441A-AY7) (Log magnitude frequency response measurement data, 801 frequency points)

Fast average	39.0625 kHz
Displayed	39.0625 kHz, 48 updates/second

Demodulation

Single-channel analog demodulation mode (log magnitude spectrum measurement data, 1601 frequency points, time cal off, channel 2 off, averaging off)

AM demodulation	39.0625 KHz
FM demodulation	19.53125 kHz
PM demodulation	9.765625 kHz

Measurement speed

Display update speed (vector mode with full span, one or two channels, 401 frequency points, no averaging, markers off, single trace with calculations off on other traces, log magnitude spectrum, frequency spans of $10^7/2^n$ Hz): 57/second

Averaging (characteristics only)

Number of averages	1 to 99,999
Overlap averaging	0% to 99.99%
Average types	
Scalar mode	rms (video), rms (video) exponential, peak hold
Vector mode	rms (video), rms (video) exponential, time, time exponential, peak hold

Fast averaging allows averaging a user-defined number of measurements without updating the displayed result. This provides faster averaging results for most measurements.

Gating (characteristics only)

Time-selective, frequency-domain analysis can be performed on any input or analog demodulated time-domain data. When gating is enabled, markers appear on the time data; gate length and delay can be set directly. Independent gate delays can be set for each input channel. See time specifications for main time length and time resolution details.

Gate length

Maximum: Main time length

Minimum: Approximately window shape ÷ (0.3 x span Hz)) [seconds]; where window shape (ws) and minimum gate length for a 10 MHz zoom time span are (for 10 MHz baseband time spans subtract 39.0625 ns):

Window	ws	Minimum gate length
Flat-top	3.819	1.328125 µs
Gaussian-top	2.215	781.25 ns
Hanning	1.5	546.875 ns
Uniform	1.0	390.625 ns

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – general

Time-capture (characteristics only)

Direct capture of input waveforms can be accomplished with spans of 10 MHz/2^n Hz. See time specifications for time-sample resolution details.

Time capture memory: 64 Ksample; 1 Msample (Option 89441A-AY9)

Benchmarks: For a one-channel, zoom time measurement (for baseband time, halve the time), 64 Ksample captures from 5.12 ms in a 10 MHz span to over 11.9 hours in a 1.19 Hz span. The optional 1 Msample captures from 81.92 ms in a 10 MHz span to over 190 hours in a 1.19 Hz span. Memory is shared if two channels are enabled, therefore length of capture is half as long.

Band power marker (characteristics only)

Markers can be placed on any time, frequency, or demodulated trace for direct computation of band power, rms square root (of power), C/N, and C/N_O, within the selected portion of the data.

Peak/average statistics

Peak and peak-to-average statistics can be enabled on main time, gate time, IQ measured time (Option 89441A-AYA), IQ reference time (Option 89441A-AYA), and math functions involving these trace types. Average power and peak statistics are computed using all samples in the active trace. Each successive trace adds additional samples to the calculations.

Displayed results	average power peak power peak/average ratio number of samples
Peak percent	90% – 99.99%. Setting can be changed at any time during or after the measurement
Signal characteristics	
Peak power range	+13 dB relative to average power of the first time record
Average power range	±3 dB relative to average power of the first time record

Display (characteristic only)

Trace formats	One to four traces on one, two, or four grids or a quad display
Other displays	On-line help text, view state
Number of colors	User-definable palette
Display points/trace	401

User-definable trace titles and information:

X-axis scaling	Allows expanded views of portions of the trace information
Display blanking	Data or full display
Graticule on/off	
Center	±5 mm referenced to bezel opening

Dimensions	
Height	107 ±5 mm
Width	154 ±5 mm
Diagonal	187.2 mm (7.4 in)

Status indicators

Overload, half range, external trigger, source on/off, trigger, pause, active trace, remote, talk, listen, SRQ.

External PC-style keyboard interface

Compatible with PC-style 101-key keyboard, male DIN5 to PS2 type mini-DIN6 pin female adapter required for some keyboards.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – general

Interfaces (characteristics only)

Active probe power	+15 Vdc, –13 Vdc; 150 mA maximum, compatible with active probes
Sync out	Active low TTL level signal synchronous with source output of periodic chirps and arbitrary blocks up to 8192 samples.

External reference in/out IF section

External reference input	Locks to a 1, 2, 5, or 10 MHz (±10 ppm) with a level > 0 dBm
External reference output	Output the same frequency as the external reference input at level of > 0 dBm into a 50 Ω load.

External reference in/out RF section

External reference input	Locks to a 1, 2, 5, or 10 MHz (±10 ppm) with a level > 0 dBm (use ≥ 5 dBm for optimum phase noise performance).
External reference output	Outputs 10 MHz at > 0 dBm (+6 dBm typical) into a 50 Ω load.

GPIB

Implementation of IEEE Std 488.1 and 488.2
SH1, AH1, T6, TE0, 1A, LE0, SR1, RL1, PP0, DC1, DT1, Cl, C2, C3, C12, E2

Benchmark characteristics (typical transfer rate of 401 frequency-point traces)

Scalar	25 traces/second
Vector	20 traces/second

RS-232	Serial port (9-pin) for connection to printer
Centronics	Parallel port for connection to a printer

External monitor output

Format	Analog plug-compatible with 30.15 kHz multi-sync monitors
Impedance	75 Ω
Level	0 to 0.7 V
Display rate	57.43 Hz
Horizontal refresh rate	30.15 kHz
Horizontal lines	400

LAN I/O

LAN support: Ethernet (IEEE 802.3) TCP/IP

IAN interface: ThinLAN (BNC connector) or AUI
Program interface: Send and receive GPIB programming codes, status bytes, and measurement results in ASCII and/or binary format.

GPIB I/O

Secondary GPIB port: Per IEEE Std 488.1 and 488.2
Functions: Controller-only; accessible from IBASIC program or front panel commands.

Peripherals

Plot/print

Direct plotting and black-and-white printing to parallel (Centronics), serial (RS-232), and GPIB graphics printers and plotters. Printers supported include the HP LaserJet, HP PaintJet, HP ThinkJet, HP DeskJet, and HP QuietJet. Single-plot spooling allows instrument operation while printing or plotting a single display.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – general

Memory and data storage

Disk devices

Nonvolatile RAM disk	100 Kbyte
Volatile RAM disk	21 Mbyte that can be partitioned between measurement, Instrument BASIC program space and RAM. Volatile RAM also supports memory of waterfalls and spectrograms with Option 89441A-AYB.
Internal 90 mm (3.5-inch) flexible disk (LIF or MS-DOS® formats)	1.44 Mbyte
External disk	GPIB interface

Disk format and file delete, rename and copy

Nonvolatile clock with time/date

Save/recall can be used to store trace data, instrument states, trace math functions, Instrument BASIC programs, and time-capture buffers.

Benchmarks (typical disk space requirements for different file types)

Trace data (401 points)	6.2 Kbyte
Instrument state	12.3 Kbyte
Trace math	2 Kbyte
Time-capture buffers (32 Ksamples)	271 Kbyte

Trace math

Operands	measurement data, data register, constant, other trace math functions, jw
Operations	+, –, *, /, cross correlation, conjugate, magnitude, phase, real, imaginary, square root, FFT, inverse FFF, natural logarithm, exponential

Trace math can be used to manipulate data on each measurement. Uses include user-units correction and normalization.

Marker functions

Peak signal track, frequency counter, band power, peak/average statistics.

Standard data format utilities

Included on three 90 mm (3.5-inch) 1.44 Mbyte flexible disks. The utilities run in MS-DOS® 2.1 or greater on an IBM PC (AT or higher) or compatible. The utilities include conversions to standard data format (SDF), PC displays of data and instrument state information, and utilities for conversion to PC-MATLAB, MATRIX$_x$, data set 58, and ACSII formats.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – options

Vector modulation analysis — Option 89441A-AYA

Supported modulation formats

The vector modulation analysis option supports both single modulated carriers and separate baseband I-Q signals. The optional second 10 MHz input channel is required for baseband I and Q analysis.

Carrier types	Continuous and pulsed/burst (such as TDMA)
Modulation formats	2 level FSK (including GFSK) 4 level FSK MSK (including GMSK) QAM implementations of: BPSK QPSK OQPSK, DQPSK, π/4DQPSK 8PSK, 16QAM, 32QAM
Default parameter settings	NADC, PDC (JDC), GSM, PHS, DECT, CDPD, TETRA, CDMA Base, CDMA Mobile

Filtering

All filters are computed to 20 symbols in length.

Filter types	Raised cosine Square-root raised cosine IS-95 compatible Gaussian None Rectangular Low pass
User-selectable filter parameters	Alpha/BT continuously adjustable from 0.05 to 100
User-defined filters	User-defined impulse response, fixed 20 points/symbol Maximum 20 symbols in length or 401 points

Frequency and symbol rate

Receiver mode	Information bandwidth
chl + j*ch2	≤ 20 MHz[1]
0 – 10 MHz	≤ 10 MHz
2 – 2650 MHz	≤ 7 MHz
2 – 2650 MHz - wide	≤ 8 MHz (Option 89441A-AYH only)

1. Two-channel measurements such as chl + j*ch2 require Option 89441A-AY7 second 10 MHz input channel.

Symbol rate

Symbol Rate is limited only by the information bandwidth

Symbol rate = (Bits/Second) / (Bits/Second)

Where bits/symbol is determined by the modulation type.
Example: For the raised-cosine filter:

Max symbol rate ≤ (Information bandwidth / (1 + a))

Measurement results (formats other than FSK)

Display update rate

Conditions: NADC preset, 50 kHz span, result length 150 symbols, 1 point/symbol. IQ envelope triggering and data synchronization off.

Update rate	> 2 per second (characteristic only)
I-Q measured	Time, spectrum (Filtered, carrier locked, symbol locked)
I-Q reference	Time, spectrum (Ideal, computed from detected symbols)
I-Q error vs. time	Magnitude, phase (I-Q measured vs. reference)
Error vector	Time, spectrum (Vector error of computed vs. reference)
Symbol table + error summary	Error vector magnitude is computed at symbol times only

Measurement results (FSK)

FSK measured	Time, spectrum
FSK reference	Time, spectrum
Carrier error	Magnitude
FSK error	Time, spectrum

Display formats

The following trace formats are available for measured data and computed ideal reference data, with complete marker and scaling capabilities and automatic grid line adjustment to ideal symbol or constellation states.

Polar diagrams

Constellation: Samples displayed only at symbol times
Vector: Display of trajectory between symbol times with 1 to 20 points/symbol

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

I or Q vs time
- Eye diagrams: Adjustable from 0.1 to 10 symbols
- Trellis diagrams: Adjustable from 0.1 to 10 symbols

Continuous error vector magnitude vs. time

Continuous I or Q vs. time

Error summary (formats other than FSK)
- Measured rms and peak values of the following:
  - Error vector magnitude
  - Magnitude error
  - Phase error
- Frequency error (carrier offset frequency)
- I-Q offset
- Amplitude droop (formats other than QAM)
- SNR (QAM formats)

Error summary (FSK)
- Measured rms and peak values of the following:
  - FSK error
  - Magnitude error
- Carrier offset frequency
- Deviation

Detected bits (symbol table)
- Binary bits are displayed and grouped by symbols. Multiple pages can be scrolled for viewing large data blocks. Symbol marker (current symbol shown as inverse video) is coupled to measurement trace displays to identify states with corresponding bits. For formats other than FSK and MSK, bits are user-definable for absolute states or differential transitions. Note: Synchronization words are required to resolve carrier phase ambiguity on non-differential modulation formats.

Accuracy (formats other than FSK and IS-95 CDMA)
Conditions: Specifications apply from 20° to 30°C, for a full-scale signal fully contained in the selected measurement span, random data sequence, instrument receiver mode of IF 0–10 MHz or RF 2–2650 MHz, range ≥ –25 dBm, start frequency ≥ 15% of span, alpha/BT ≥ 0.3[1], and symbol rate ≥ 1 kHz. For symbol rates less than 1 kHz, accuracy may be limited by phase noise.

Residual errors (result length = 150 symbols, averages = 10)

Error vector magnitude	
Freq span < 100 kHz	0.3% rms
Freq span ≤ 1 MHz	0.5% rms
Freq span > 1 MHz	1.0% rms
Magnitude error	
Freq span ≤ 100 kHz	0.3% rms
Freq span ≤ 1 MHz	0.5% rms
Freq span > 1 MHz	1.0% rms
Phase error (for modulation formats with equal symbol amplitudes)	
Freq span ≤ 100 kHz	0.17° rms
Freq span ≤ 1 MHz	0.34° rms
Freq span > 1 MHz	0.57° rms
Frequency error (Added to frequency accuracy if applicable)	Symbol rate/500,000
Origin/I-Q Offset	–60 dB

Accuracy (2 FSK and 4 FSK)
Residual errors, typical:
4 FSK or 2 FSK, symbol rate = 3.2 kHz, deviation = 4.8 kHz, instrument receiver mode of IF 0–10 MHz or RF 2–2650 MHz, 50 kHz span, full-scale signal, range ≥ –25 dBm, result length = 150, averages = 10, tenth-order Bessel filtering with 3 dB bandwidth = 3.9 kHz.[2]

FSK error	0.5% rms
Magnitude error	0.3% rms
Deviation	±0.3% rms (14 Hz)
Carrier frequency offset (Added to frequency accuracy if applicable)	±0.3% of deviation

DECT preset (2 FSK symbol rate = 1.152 MHz, BT = 0.5) 288 kHz deviation, instrument receiver mode of IF 0–10 MHz or RF 2–2650 MHz, 4 MHz span, full-scale signal, result length = 150, averages = 10.

FSK error	1.5% rms
Magnitude error	1.0% rms
Deviation	±1.0% rms (2.88 kHz)
Carrier frequency offset (Added to frequency accuracy if applicable)	±0.5% of deviation

1. 0.3 ≤ alpha ≤ 0. 7 for Offset QPSK
2. Note: For error analysis, a Gaussian reference filter with BT = 1.22 is used to approximate the tenth-order Bessel filter.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – options

Accuracy (IS-95 CDMA)

CDMA Base or CDMA Mobile preset, instrument mode of IF (0 – 10 MHz) or RF (2 – 2650 MHz), 2.6 MHz span, full scale signal, result length = 200, averages = 10.

Residual Errors

Error vector magnitude	1% rms
Magnitude error	1% rms
Phase error	0.57° rms
Frequency error	10 Hz
(Added to frequency accuracy if applicable)	
Origin I/Q offset	–60 dB

Signal acquisition

Note: Signal acquisition does not require an external carrier or symbol clock

Data block length
- Adjustable up to 4096 samples
- Examples:
- 4096 symbols at 1 point/symbol
- 409 samples at 10 points/symbol

Symbol clock — Internally generated

Carrier lock — Internally locked

Triggering
- Single/continuous
- External
- Internal source
- Pulse search (searches data block for beginning of TDMA burst, and performs analysis over selected burst length)

Data synchronization
- User-selected synchronization words
- Arbitrary bit patterns up to 30 symbols long, at any position in a continuous or TDMA burst and measurement result. Up to 6 words can be defined.

Arbitrary waveform source

RAM-based arbitrary waveforms

Waveform registers	Maximum 6
Waveform length	4096 complex points each (16,384 with Option 89441A-AYB)

Residual accuracy, typical

Examples

π/4DQPSK, 24.3 ksymbols/second, a = 0.35	EVM ≤ 0.7% rms
GMSK, 270.833 ksymbols/second, BT= 0.30	EVM ≤ 1.0% rms

Adaptive equalization

This option equalizes the digitally modulated signal to remove effects of linear distortion (such as unflatness and group delay) in a modulation quality measurement.

Equalizer performance is a function of the filter design (e.g., length, convergence, taps/symbol) and the quality of the signal being equalized.

Equalizer

Decision-directed, LMS, feed-forward equalization with adjustable convergence rate.

Filter length	3–99 symbols, adjustable
Filter taps	1, 2, 4, 5, 10, or 20 taps/symbol

Measurement results

Equalizer impulse response
Channel frequency response

Supported modulation formats

MSK, BPSK, QPSK, OQPSK, DQPSK, π/4DQPSK, 8 PSK, 16 QAM, 32 QAM, 64 QAM, 256 QAM, 8 VSB, 16 VSB

Digital video modulation analysis—Option 89441A-AYH

(requires Option 89441A-AYA)

This option extends the capabilities of the vector modulation analysis Option 89441A-AYA by adding modulation formats used for digital video transmission. Except where noted, all of the standard capabilities of Option 89441A-AYA are provided for the new modulation formats.

Supported modulation formats

Additional modulation formats	8 and 16VSB 16, 32, 64 and 256QAM 16, 32, and 64QAM (differentially encoded per DVB standard)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Agilent 89441A technical data – options

Frequency span
The (2–2650 MHz)-wide receiver mode increases the maximum allowable vector frequency span to 8 MHz. Specifications for this mode are in the RF specification section.

Maximum symbol rate
Option 89441A-AYH analyzes vector modulated signals up to a maximum symbol rate determined by the information bandwidth of the receiver mode and the excess bandwidth factor (a) of the input signal, according to:

Max symbol rate ≤ Information bandwidth / (1 + a)

(Note: the maximum symbol rate is doubled for VSB signals.)

Receiver mode	Information bandwidth
chl + j*ch2	≤ 20 MHz[1]
0 – 10 MHz	≤ 10 MHz
2 – 2650 MHz normal	≤ 7 MHz
2 – 2650 MHz wide	≤ 8 MHz
External	≤ 10 MHz[1]

Example: For a 64QAM signal (a = 0.15), the maximum symbol rate for the (2–2650 MHz)-wide receiver is 8 MHz/(1.15) = 6.96 Msymbols/second.

Measurement results and display formats
Identical to Option 89441A-AYA measurement results and display formats except for the following changes to the error summary display:

VSB pilot level is shown, in dB relative to nominal.
For VSB formats, SNR is calculated from the real part of the error vector only.
For DVB formats, EVM is calculated without removing IQ offset.

Accuracy
Residual errors (typical)
8VSB or 16VSB, symbol rate = 10.762 MHz, a = 0.115, instrument receiver mode of IF 0–10 MHz or RF 2–2650 MHz, 7 MHz span, full-scale signal, range ≥ –25 dBm, result length = 800, averages = 10.

Residual EVM ≤ 1.5% (SNR ≥ 36 dB)

16, 32, 64 or 256 QAM, symbol rate = 6.9 MHz, χ = 0.15, instrument receiver mode of IF 0–10 MHz or RF 2–2650 MHz-wide, 8 MHz span, full-scale signal, range ≥ –25 dBrn, result length = 800, averages = 10.

Residual EVM ≤ 1.0% (SNR ≥ 40 dB)

1. Downconverter dependent

Filtering
All Option 89441A-AYA filter types are supported except user-defined filters for VSB analysis. Filters are calculated to 40 symbols in length.

Triggering and synchronization
All Option 89441A-AYA signal acquisition features are supported except pulse and sync word search for VSB analysis.

Waterfall and spectrogram — Option 89441A-AYB

Waterfall

Types	Vertical and skewed, Azimuth adjustable 0 to ±45 Normal and hidden line With or without baseline.
Adjustable parameters	Trace height Buffer depth Elevation Threshold

Spectrogram

Types	Color, normal, and reversed monochrome, normal, and reversed User color maps (2 total)
Adjustable parameters	Number of colors Enhancement (color-amplitude weighting) Threshold

Trace select
When a waterfall or spectrogram measurement is paused or completed, any trace in the trace buffer can be selected by trace number or by z-axis value. The marker values and marker functions apply to the selected trace.

Z-axis value
The z-axis value is the time the trace data was acquired relative to the start of the measure ment. The z-axis value of the selected trace is displayed as part of the marker readout.

Display update rate: 30 to 60/second, typical

Memory required (characteristic only)
Displays occupy memory at the rate of 175 traces/Mbyte (for traces of 401 frequency points). A full screen of 307 traces will require 2.25 Mbytes of free memory.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Advanced LAN support — Option 89441A-UG7

Remote X11 display (characteristic only)

Update rate: > 20 per second, depending on workstation performance and LAN activity.
X11 R4 compatible
X-terminals, UNIX workstations, PC with X-server software
Display: 640 x 480 pixel minimum resolution required; 1024 x 768 recommended.

FTP data (characteristic only)

Traces A, B, C, D
Data registers D1-D6
Time capture buffer
Disk files (RAM, NVRAM, floppy disk)
Analyzer display plot/print



Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.

Agilent Technologies' Test and Measurement Support, Services, and Assistance
Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise
Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage
Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test and measurement needs.

Online assistance:
www.agilent.com/find/assist

Phone or Fax

United States:
(tel) 800 452 4844

Canada:
(tel) 877 894 4414
(fax) 905 282 6495

China:
(tel) 800 810 0189
(fax) 800 820 2816

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:
(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:
(tel) (65) 6375 8100
(fax) (65) 6836 0252
Email: tm_asia@agilent.com

Product specifications and descriptions in this document subject to change without notice.

MS-DOS is a US registered trademark of Microsoft Corporation.
Matlab is a product of The Math Works.
$Matrix_x$ is a product of Integrated Systems, Inc.

© Agilent Technologies, Inc. 2002
Printed in USA, June 6, 2002
5965-5425E



Agilent Technologies

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP