ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent E1367A* at our website: *Click HERE*


STEP Dionysos Job: 210%XXXX5460-0001 5965-5609E Comp: 04-28-00 Time: 11:12 OP: NN

Agilent E1367A

Dual 1x4, 75 Ω RF Multiplexer

Data Sheet

- **1-Slot, B-size, register based**
- **Two 1x4 multiplexers**
- **Up to 1.3 GHz signals switched**
- **BNC connectors**
- **Off-channels terminated**
- **Tree-switched configuration provides high isolation**

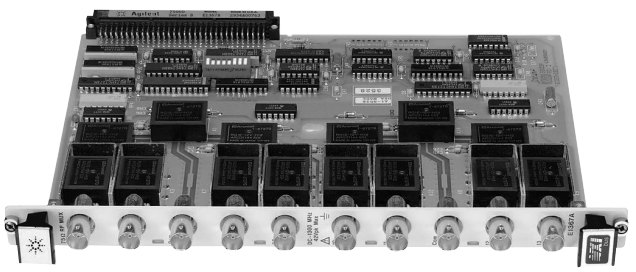

Agilent E1367A

Description

The Agilent E1367A 75 Ω RF Multiplexer is a **B-size, 1-slot, register-based VXI module.** It is the ideal choice for video and telecommunications applications. The E1367A is identical to the E1366A, except that the E1366A has a 50 Ω characteristic impedance.

Switching consists of connecting a channel to its common terminal. The E1367A can easily be used with SCPI commands to scan multiple channels, where each channel is switched to its common, one at a time. When open (disconnected from common), each channel is connected to a 75 Ω termination.

The E1367A is arranged as two independent banks of channels (Bank 0 and Bank 1), each acting as a 1x4 one-wire multiplexer. Only one channel in each bank can be connected to its common at any time. Each channel consists of a nonlatching, armature relay. At power-on or reset, all channels are open and connected to their termination resistors. The termination resistor can be removed if desired. The multiplexer relays are arranged in a tree-switched configuration, providing high isolation and low VSWR.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

Cables and Connectors

Various 75 Ω cables are available from Agilent for connecting to the BNC connectors on the front panel of the multiplexer. Adapters and other connectors are also available.

C-size Adapter

For installing the E1367A in a C-size mainframe, the E1403C active adapter is recommended.

Product Specifications

Input

Maximum voltage (center or shield-to-center, shield or chassis):	42 V
Maximum current (per channel or common):	
DC:	1 A
AC rms:	1 A
Maximum power (per channel or common):	
DC:	24 W
AC:	24 VA

Agilent Technologies
Innovating the HP Way

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

DC

Maximum thermal offset: 6 µV
Closed channel resistance (typical): <1 Ω initial, <3 Ω end of relay life
Insulation resistance (between any two terminals): >10E8 Ω ≤40°C, ≤65% RH

AC

Note: For AC performance, ZL=ZS=ZO, ≤40 °C, RH ≤95% for C-size, RH ≤65% for B-size

Characteristic impedance (Zo): 75 Ω
Insertion loss:
- **<10 MHz:** <0.3 dB
- **<100 MHz:** <0.7 dB
- **<500 MHz:** <1.5 dB
- **<1.3 GHz:** <3.0 dB
- **<3 GHz (typ):** n/a

Crosstalk (channel-to-channel):
Derate crosstalk specifications by 6 dB if all channels are unterminated.
- **<10 MHz:** <–90 dB
- **<100 MHz:** <–80 dB

Crosstalk(1) (channel-to-channel, one channel closed or channel-to-common) (terminated):
- **<200 MHz:** n/a
- **<500 MHz:** <–60 dB
- **<1.3 GHz:** <–40 dB
- **<3 GHz (typ):** n/a

VSWR:
- **<10 MHz:** <1.2
- **<100 MHz:** <1.25
- **<200 MHz:** n/a
- **<500 MHz:** <1.35
- **<1.3 GHz:** <1.55
- **<3 GHz:** n/a

Risetime: <300 ps
Signal delay: <3 ns
Capacitance:
- **Center-shield:** <60 pF
- **Chassis-shield:** <0.15 µF

General Characteristics

Relays: Non-latching armature
Power up/down state: All open
Minimum relay life:
- **No load:** 5x 10E6 operations
- **Rated load:** 10E5 operations

General Specifications

VXI Characteristics

VXI device type: Register based, A16, slave only
Size: B
Slots: 1
Connectors: P1
Shared memory: None
VXI busses: None
C-size compatibility: Requires E1403C

Instrument Drivers

See the Agilent Technologies Website (http://www.agilent.com/find/inst_drivers) for driver availability and downloading.

Command module firmware: Downloadable
Command module firmware rev: A.01
I-SCPI Win 3.1: Yes
I-SCPI Series 700: Yes
C-SCPI LynxOS: Yes
C-SCPI Series 700: Yes
Panel Drivers: Yes
VXI*plug&play* Win Framework: No
VXI*plug&play* Win95/NT Framework: No
VXI*plug&play* HP-UX Framework: No

Module Current

	I_{PM}	I_{DM}
+5 V:	0.1	0.01
+12 V:	0.18	0.01
–12 V:	0	0
+24 V:	0	0
–24 V:	0	0
–5.2 V	0	0
–2 V:	0	0

Cooling/Slot


Watts/slot: 3.00
∆P mm H_2O: 0.05
Air Flow liter/s: 0.25

Ordering Information

Description	Product No.
Dual 1x4 75 Ω RF Multiplexer	E1367A
Service Manual	E1367A 0B3
3 yr. Retn. to Agilent to 1 yr. OnSite Warr.	E1367A W01

STEP Dionysos Job: 210%XXX5461-0002 5965-5609E Comp: 04-28-00 Time: 11:12 OP: NN

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

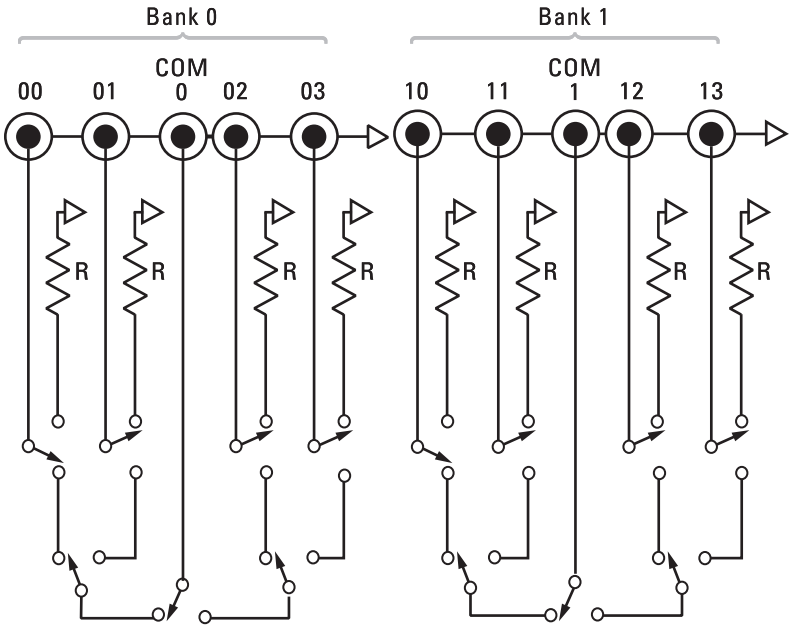


Agilent E1367A-Circuit Diagram


E1367A

E1474A, E1475A


Typical Crosstalk (Channel-to-channel)

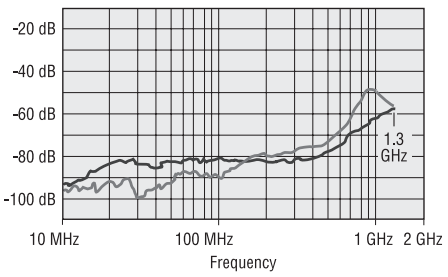

Typical Return Loss/VSWR

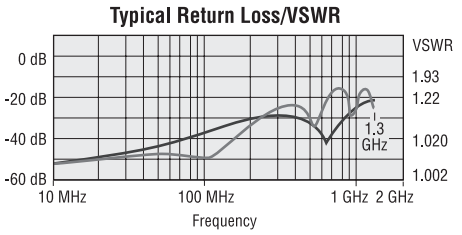

Typical Insertion Loss

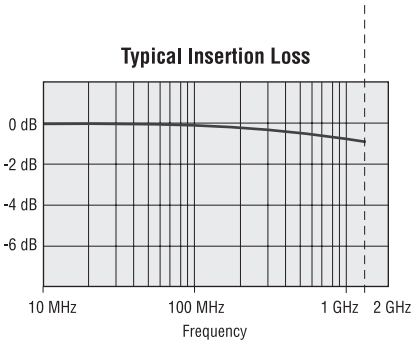

75 Ω Mux Typical AC Performance Graphs

STEP Dionysos Job: 210%XXX5462-0003 5965-5609E Comp: 04-28-00 Time: 11:12 OP: NN

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Related Literature

2000 Test System and VXI Catalog CD-ROM,
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

2000 Test System and VXI Catalog,
Agilent Pub. No. 5980-0307E (overview of VXI products)

1998 Test System and VXI Products Data Book,
Agilent Pub. No. 5966-2812E

Online

Internet access for Agilent product information, services and support
www.agilent.com/find/tmdir

VXI product information
www.agilent.com/find/vxi

Defense Electronics Applications
www.agilent.com/find/defense_ATE

Agilent Technologies VXI Channel Partners
www.agilent.com/find/vxichanpart

Agilent Technologies' HP VEE Application Website
www.agilent.com/find/vee

Agilent Technologies Data Acquisition and Control Website
www.agilent.com/find/data_acq

Agilent Technologies Instrument Driver Downloads
www.agilent.com/find/inst_drivers

Agilent Technologies Electronics Manufacturing Test Solutions
www.agilent.com/go/manufacturing

Get assistance with all your test and measurement needs at
www.agilent.com/find/assist
or check your local phone book for the Agilent office near you.

Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources (www.agilent.com).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

Phone and fax
United States:
Agilent Technologies
(tel) 1 800 452 4844

Canada:
Agilent Technologies Canada Inc.
(tel) 1 877 894 4414

Europe:
Agilent Technologies
Test & Measurement
European Marketing Organisation
(tel) (31 20) 547 2000

Japan:
Agilent Technologies Japan Ltd.
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Latin America:
Agilent Technologies
Latin American Region Headquarters, U.S.A.
(tel) (305) 267 4245
(fax) (305) 267 4286

Australia/New Zealand:
Agilent Technologies Australia Pty Ltd.
(tel) 1 800 629 485 (Australia)
(fax) (61 3) 9272 0749
(tel) 0 800 738 378 (New Zealand)
(fax) (64 4) 802 6881

Asia Pacific:
Agilent Technologies, Hong Kong
(tel) (852) 3197-7777
(fax) (852) 2506-9284

Data Subject to Change
© Agilent Technologies 2000
Printed in the U.S.A. 04/2000
Publication No.: 5965-5609E

Agilent Technologies
Innovating the HP Way

STEP Dionysos Job: 210%XXX5463-0004 5965-5609E Comp: 04-28-00 Time: 11:12 OP: NN

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP