ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent E1511A* at our website: ***Click HERE***

Agilent E1511A
4-Channel Transient Strain SCP

Data Sheet

- **Use with Agilent E1413C/E1415A/E1419A**
- **4 channels of sample/hold strain measurements**
- **4 channels of programmable excitation voltages**
- **Bridge excitation voltages of 1 V, 2 V, 5 V, or 10 V**

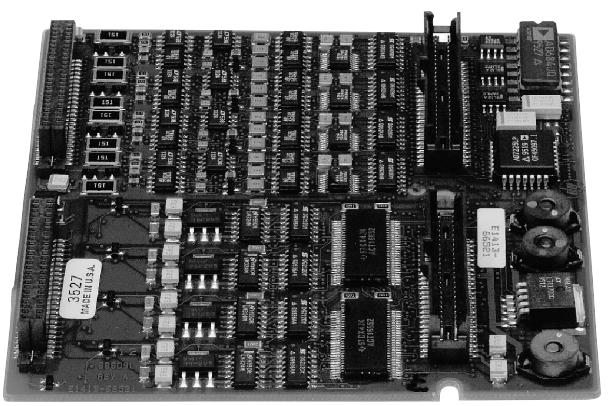

Agilent E1511A

Description

The Agilent E1511A 4-Channel Transient Strain SCP provides four channels of strain measurements. It provides strain completion circuitry and excitation voltages, a programmable filter, and sample and hold circuitry. The sample and hold inputs sample all four channels simultaneously to reduce the skew introduced by scanning.

The low-pass filter on each sample and hold channel is a 6th order Bessel active RC filter used to provide alias protection and noise reduction. The filter cutoff frequencies are 1 kHz, 500 Hz, 250 Hz, 100 Hz, and 15 Hz.

The SCP can be wired for measuring excitation voltages at the bridge connection (remote sense) or locally (terminal module). Excitation voltages of 0 V, 1 V, 2 V, 5 V, or 10 V are available on each channel.

The SCP provides a voltage gain of 0.5, 8, 64, or 512 for each channel. This SCP takes two adjacent slots in the VXI module.

Use the E1511A with the following VXI modules:

Model	Description
E1413C	64-Channel Scanning A/D Converter
E1415A	Algorithmic Closed Loop Controller
E1419A	Multifunction Measurement and Control Module

Refer to the Agilent Technologies Website for recent product updates, if applicable.

Agilent Technologies
Innovating the HP Way

Product Specifications

These specifications for the E1511A reflect the combined performance of the scanning A/D and the E1511A SCP.

Measurement Ranges

DC Volts: ± 8 V Full Scale

Input Characteristics

Maximum input voltage (normal mode plus common mode):
- **Operating:** <± 8 V peak
- **Damage level:** >± 42 V peak

Maximum common mode voltage:
- **Operating:** <± 16 V peak
- **Damage level:** >± 42 V peak

Common mode rejection (0 to 60 Hz):
- **x0.5 gain:** >60 dB
- **x8 gain:** >78 dB
- **x64 gain:** >100 dB
- **x512 gain:** >100 dB

Input impedance: >100 MΩ

Maximum Tare Cal Offset

Maximum tare cal offset depends on A/D range and SCP gain.

Gain	Maximum Offset
x0.5	± 25% of full scale
x8	± 90 mV
x64	± 95 mV
x512	± 95 mV

Filter Characteristics (6-pole Bessel filter)

Normal mode rejection:

15 Hz filter:
- **15 Hz:** –3 dB
- **50 Hz:** >33 dB
- **60 Hz:** >43 dB

100 Hz filter:
- **100 Hz:** –3 dB
- **400 Hz:** >43 dB

250 Hz filter:
- **250 Hz:** –3 dB
- **1000 Hz:** >43 dB

500 Hz filter:
- **500 Hz:** –3 dB
- **2000 Hz:** >43 dB

1000 Hz filter:
- **1000 Hz:** –3 dB
- **4000 Hz:** >43 dB

Sample Time Skew Between Channels

Because the low-pass filter precedes the sample and hold, the interchannel sample time skew is primarily determined by the matching of the filter propagation delay times. The table below lists the propagation delay for a step function input (measured at 50% of the final value) for each filter setting, as well as the matching between channels programmed to the same filter setting.

Bandwidth	Step propagation delay (nominal)	Delay matching (± from nominal)
1 kHz:	427.5 µsec	10 µsec
500 Hz:	854.9 µsec	20 µsec
250 Hz:	1.710 µsec	40 µsec
100 Hz:	4.275 msec	100 µsec
15 Hz:	28.50 msec	670 µsec

Maximum Filter Overshoot
< 1% of input step size

Measurement Accuracy DC Voltage

For autorange, add .05% of reading for input voltages >± 4 V.

Accuracy — Gain x0.5

Range ± FS	Linearity % of Reading:	Offset Error:	Noise 3σ:
125 mV:	0.02	488 µV	1.5 µV
0.5 mV:	0.02	488 µV	1.5 µV
2.0 V:	0.02	488 µV	1.5 µV
8.0 V:	0.02	488 µV	1.5 µV
Temperature Coefficients:	*add tempco error to above table*		
Gain:	10 ppm/°C (after *CAL)		
Offset:			
0-30 °C:	0 µV/°C		
30-55 °C:	0.75 µV/°C		

Accuracy — Gain x8

Range ± FS	Linearity % of Reading:	Offset Error:	Noise 3σ:
7.8 mV:	0.02	30.5 µV	95 µV
31.25 mV:	0.02	30.5 µV	95 µV
125 mV:	0.02	30.5 µV	95 µV
0.5 V:	0.02	30.5 µV	95 µV
Temperature Coefficients:	*add tempco error to above table*		
Gain:	10 ppm/°C (after *CAL)		
Offset:			
0-30 °C:	0 µV/°C		
30-55 °C:	0.75 µV/°C		

Accuracy — Gain x64

Range ± FS	Linearity % of Reading:	Offset Error:	Noise 3σ:
3.9 mV:	0.02	15 µV	12 µV
15.6 mV:	0.02	15 µV	12 µV
62.5 mV:	0.02	15 µV	12 µV
Temperature Coefficients:	*add tempco error to above table*		
Gain:	10 ppm/°C (after *CAL)		
Offset:			
0-40 °C:	0.14 µV/°C		
40-55 °C:	0.38 µV/°C		

Accuracy — Gain x512

Range ± FS	Linearity % of Reading:	Offset Error:	Noise 3σ:
7.81 mV:	0.04	15 µV	2 µV
Temperature Coefficients:	*add tempco error to above table*		
Gain:	10 ppm/°C (after *CAL)		
Offset:			
0-40 °C:	0.14 µV/°C		
40-55 °C:	0.38 µV/°C		

Current Requirements (Amps)

5 V max	24 V max	-24 V max
0.55	0.145	0.143

Ordering Information

Description	Product No.
4-Channel Transient Strain SCP	E1511A

Related Literature

2000 Test System and VXI Catalog CD-ROM,
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

2000 Test System and VXI Catalog,
Agilent Pub. No. 5980-0307E (overview of VXI products)

1998 Test System and VXI Products Data Book,
Agilent Pub. No. 5966-2812E

Online

Internet access for Agilent product information, services and support
www.agilent.com/find/tmdir

VXI product information
www.agilent.com/find/vxi

Defense Electronics Applications
www.agilent.com/find/defense_ATE

Agilent Technologies VXI Channel Partners
www.agilent.com/find/vxichanpart

Agilent Technologies' HP VEE Application Website
www.agilent.com/find/vee

Agilent Technologies Data Acquisition and Control Website
www.agilent.com/find/data_acq

Agilent Technologies Instrument Driver Downloads
www.agilent.com/find/inst_drivers

Agilent Technologies Electronics Manufacturing Test Solutions
www.agilent.com/go/manufacturing

Get assistance with all your test and measurement needs at
www.agilent.com/find/assist
or check your local phone book for the Agilent office near you.

Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources (www.agilent.com).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

Phone and fax
United States:
Agilent Technologies
(tel) 1 800 452 4844

Canada:
Agilent Technologies Canada Inc.
(tel) 1 877 894 4414

Europe:
Agilent Technologies
Test & Measurement
European Marketing Organisation
(tel) (31 20) 547 2000

Japan:
Agilent Technologies Japan Ltd.
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Latin America:
Agilent Technologies
Latin American Region Headquarters, U.S.A.
(tel) (305) 267 4245
(fax) (305) 267 4286

Australia/New Zealand:
Agilent Technologies Australia Pty Ltd.
(tel) 1 800 629 485 (Australia)
(fax) (61 3) 9272 0749
(tel) 0 800 738 378 (New Zealand)
(fax) (64 4) 802 6881

Asia Pacific:
Agilent Technologies, Hong Kong
(tel) (852) 3197-7777
(fax) (852) 2506-9284

Data Subject to Change
© Agilent Technologies 2000
Printed in the U.S.A. 04/2000
Publication No.: 5966-2393E

Agilent Technologies
Innovating the HP Way

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP