ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent E2625A* at our website: ***Click HERE***

E2625A Communication Mask Test Kit
E2698A Ethernet Masks

Data Sheet

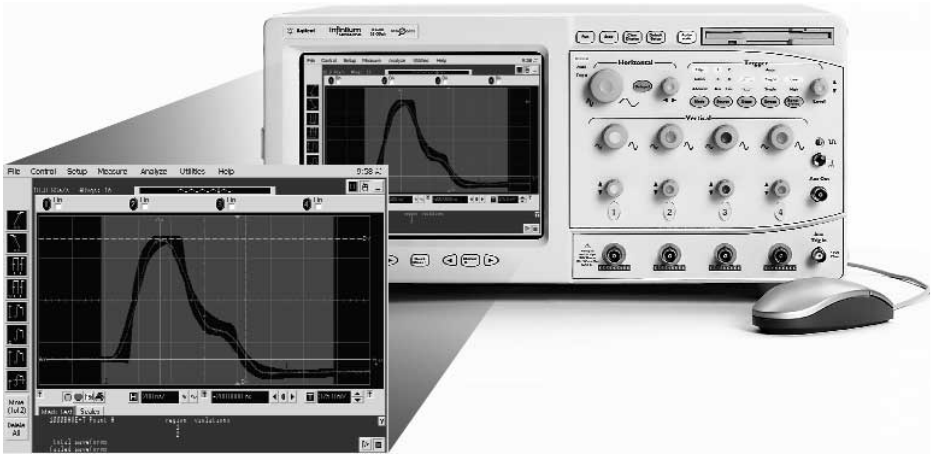

- 43 industry-standard ANSI T1.102, ITU-T G.703, and IEEE 802.3 communication signal mask templates
- Mask testing for positive and negative pulses
- Electrical communication adapters optimized for use with the Agilent Infiniium AutoProbe Interface
- FCC Part 68 Option A, B, and C masks for “line build-out” testing of DS1/T1 signals
- Automatic “isolated ones” triggering for some pulse mask types
- One-button alignment for best fit of mask templates to test waveforms for standard that allow scaling and/or offset
- Automatic pass/fail comparison of mask templates to corresponding input waveforms
- Failure highlighting for fast identification of mask failure areas
- Flagging of out-of-specification waveform amplitudes for ANSI T1.102 masks
- Mask failure waveform characterization with features such as color-graded persistence, histograms, drag and drop measurements and eye diagram measurements
- Ability to load user-defined masks from ASCII text files
- Screen annotation for complete documentation of measurements to electronic files or printers
- Familiar Windows® graphical user interface
- Built-in LAN interface for connecting your scope to PCs, network printers and other Infiniium oscilloscopes
- Remote programmability of mask test features using GPIB commands for automated test applications

The Infiniium E2625A Communication Mask Test Kit and E2698A Ethernet Masks build on the Infiniium oscilloscopes’ ease-of-use legacy by making communications conformance testing accessible with one mouse click. Infiniium’s familiar Windows® XP Pro open operating system enables you to quickly and easily load mask templates to the oscilloscope application and configure mask testing. As an added feature, the Communication Mask Test Kit includes a set of electrical communication adapters to ensure convenient, reliable, and accurate connections to your device under test.

Agilent Technologies

Easy Mask Setup

The E2625A Communication Mask Template library and the E2698A Ethernet Masks come on 1.44 MB floppy disks. Configuring a mask test is fast and easy. The mask test dialog box lets you select the oscilloscope channel and display masks contained in the mask template library. Once your test is configured, you can dismiss the dialog box to maximize waveform viewing area and control your test directly using pop-up menus. You'll see an on-screen indication of the current mask and its data rate.

The E2625A Communication Mask Template library includes the following masks:

Standard	Mask Template	Data Rate
ANSI T1.102	DS1	1.544 Mb/s
	DS1A	2.048 Mb/s
	DS1C	3.152 Mb/s
	DS2	6.312 Mb/s
	DS3	44.736 Mb/s
	DS4NA (eye)	139.264 Mb/s
	DS4NA (max)	139.264 Mb/s
	STS1 (eye)	51.840 Mb/s
	STS1 (pulse)	51.840 Mb/s
	STS3 (eye)	155.520 Mb/s
	STS3 (max)	155.520 Mb/s
	FCC Part 68.308 Option A	1.544 Mb/s
	FCC Part 68.308 Option B	1.544 Mb/s
	FCC Part 68.308 Option C	1.544 Mb/s
SONET GR-253-CORE	OC1	51.840 Mb/s
	OC3	155.520 Mb/s
	OC12	622.080 Mb/s
IEEE 802.3	10BASE-T (TP_IDL)	10 Mb/s
	10BASE-T (LINK)	10 Mb/s
	100BASE-TX (STP)	100 Mb/s
	100BASE-TX (UTP)	100 Mb/s
ITU-T G.703	E1 (120 ohm)	2.048 Mb/s
	E1 (75 ohm)	2.048 Mb/s
	E2	8.448 Mb/s
	E3	34.368 Mb/s
	E4 (0)	139.264 Mb/s
	E4 (1)	139.264 Mb/s
	E4 (1) Inverted	139.264 Mb/s
	DS1	1.544 Mb/s
	DS2 (110 ohm)	6.312 Mb/s
	DS2 (75 ohm)	6.312 Mb/s
	DS3	44.736 Mb/s
	STM1E (0)	155.520 Mb/s
	STM1E (1)	155.520 Mb/s
	STM1E (1) Inverted	155.520 Mb/s

The E2698A Ethernet Masks provide mask templates for the following standards:

Standard	Mask Template	Data Rate
IEEE 802.3	1000BASE-T (points A, B, C, D, F, H)	250 Mb/s
	10BASE-T (TP_IDL)	10 Mb/s
	10BASE-T (LINK)	10 Mb/s
	10BASE-T (VOLT EXT)	10 Mb/s
	10BASE-T (VOLT INT)	10 Mb/s
	100BASE-TX (STP)	100 Mb/s
	100BASE-TX (UTP)	100 Mb/s



E2625A Communications Mask Test Kit provides a 1.44MB floppy with the mask templates as well as a number of hardware connectors and adapters.

Once you've chosen the appropriate mask, simply click on the Align button to automatically perform a fast, exhaustive search for the optimum fit of the mask to the test signal (some communication standards do not allow for any margin adjustment; thus, the align function is not available in all cases). This virtually eliminates the need for manual adjustments to your oscilloscope. This is an especially valuable feature for production test applications.

Some communication standards use the same template for testing conformance on negative and positive pulses. For those cases, an option is available to simply Invert Mask.

The length of a mask test can be set to run until forever, run until a defined number of waveforms have been captured, or run for a defined amount of time. An option is also available that allows you to stop acquiring after a mask failure is detected.

Running a Mask Test

Once your mask kit is configured, you can close the mask test setup dialog box. Below the waveform viewing area, you now have controls to start and stop a mask test. Additionally, you can see a readout of the total number of waveform points that failed in each region of the mask template, along with the total number of waveforms captured and the total number of failed waveforms.

Use the mouse or Infiniium's keyboard to add labels or notes to your screen images, then save them to the floppy or hard disk. The built-in LAN interface makes it easy to transfer these images to network computers so you can share or document your work. You can also print the waveform to local or network printers.

"Isolated ones" triggering

In some communication standards, it is necessary to isolate a pulse for mask testing to eliminate intersymbol interference caused by adjacent pulses. Infiniium's E2625A Communications Mask Test Kit makes this easy through the use of "isolated ones" triggering for pulse mask templates, eliminating the need for sophisticated pattern generators. When you load in a pulse mask, Infiniium automatically sets up the trigger to capture an "isolated one" pattern as defined by the particular communication standard.

Connecting to your device under test

Product compliance testing requires proper connection to your communications device. Included in the E2625A Communications Mask Test Kit is a set of electrical termination adapters and adapter cables to ensure convenient, reliable, and accurate connections to your device under test. The kit also includes system performance accessories and the Mask Template Library software—all packaged in a protective, hard-shell case.

E2621A 100/110/120 ohm differential termination adapter

The E2621A ac-coupled, balanced adapter is included in the E2625A Communications Mask Test Kit. The E2621A allows connection to differential communications signals by terminating the signal into 100, 110, or 120 ohms. It also adapts various connector styles (i.e., bantam, RJ48C, and Siemens) to the oscilloscope's 50 ohm BNC input. You can select the termination impedance using the built-in three-way switch. The Infiniium AutoProbe interface allows the oscilloscope to recognize the E2621A and read the termination switch setting. Furthermore, Infiniium will flag you when the switch setting differs from the standard's required termination impedance.

The E2621A complies with the following ANSI T1.102 and ITU-T G.703 standards:

DS1	(1.544 Mb/s)
DS1A	(2.048 Mb/s)
DS1C	(3.152 Mb/s)
DS2	(6.312 Mb/s)
E1	(2.048 Mb/s)

Bandwidth (-3dB)	<10 kHz to >100 MHz
Rise Time	<3.5 ns
Attenuation	5X (–14 dB) ± 3% (50 kHz to 30 MHz)



E2622A 75-ohm termination adapter

The E2622A is also included in the Communications Mask Test Kit. The E2622A dc-coupled, unbalanced adapter allows connection to single-ended signals by terminating the signal into 75 ohms. Various BNC adapters can be attached to its input. The Infiniium AutoProbe interface allows the oscilloscope to recognize the E2622A and automatically configure itself.

The E2622A complies with the following ANSI T1.102 and ITU-T G.703 standards:

DS3	(44,736 Mb/s)
DS4NA	(139.264 Mb/s)
STS1	(51.840 Mb/s)
STS3	(155.520 Mb/s)
STM1E	(155.520 Mb/s)
E1	(2.048 Mb/s)
E2	(8.448 Mb/s)
E3	(34.368 Mb/s)
E4	(139.264 Mb/s)

Bandwidth (-3dB)	<1 GHz*
Rise Time	<350 ps
Attenuation	5X (–14 dB) ± 1.5%

* Full bandwidth only achievable with the 54832B/D, 54833A/D, 5484xA/B and 5485xA oscilloscopes



Compatibility

The E2625A Communications Mask Test Kit is compatible with the following oscilloscopes:

Infiniium Oscilloscope	Operating System	Software Revision
5481xA, 5482xA	Windows 98	A.03.00 or higher
5483xB/D	Windows 98	A.02.00 or higher
5483xB/D, 54833A/D	Windows XP Pro	A.03.10 or higher
54835A, 54845A	Windows 98	A.03.00 or higher
54846A	Windows 98	A.03.00 or higher
54845B	Windows 98	A.03.00 or higher
54846B	Windows 98	A.03.00 or higher
5485xA	Windows XP Pro	A.03.10 or higher
8000 Series	Windows XP Pro	A.04.90 or higher
80000A Series	Windows XP Pro	A.03.90 or higher
80000B Series	Windows XP Pro	A.04.91 or higher

The E2698A Ethernet Masks are compatible with the following oscilloscopes:

Infiniium Oscilloscope	Operating System	Software Revision
5483xB/D, 54833A/D	Windows XP Pro	A.03.10 or higher
5485xA	Windows XP Pro	A.03.10 or higher
80000 Series	Windows XP Pro	A.03.90 or higher

Windows® is a U.S. registered trademark of Microsoft Corporation.

Ordering Information

The E2625A Communications Mask Test Kit provides the following:
Mask Template Library Floppy Disk
E2621A 100/110/120 ohm balanced termination adapter with bantam (f) connector
E2622A 75 ohm unbalanced termination adapter with BNC (f) connector
Bantam (m) to Siemens (f) adapter cable; for connection to E2621A adapter when a Siemens (f) connection is needed
Dual-bantam (m) to RJ48C (m) adapter cable; for connection of either transmit or receive T1 signals to E2621A adapter
RJ48C (f) to RJ48C (f) adapter/coupler
Bantam (m) to BNC (f); for self calibration of E2621A adapter and the Infiniium oscilloscope
BNC (m) to BNC (f) 50 to 75 ohm adapter; for self calibration of E2622A adapter and the Infiniium oscilloscope
BNC (m) to BNC (m) cable; 30 cm long
Hard-shell case for storage of all kit accessories

The E2698A Ethernet Masks provides the following:
Six 1000BASE-T Masks
Two 100BASE-T Masks
Four 10BASE-T Masks

Purchase of the E2625A Communications Mask Test Kit is not required to use the E2698A Ethernet Masks.

Agilent Technologies' Test and Measurement Support, Services, and Assistance
Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise
Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

Your Advantage
Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.

Agilent Direct

www.agilent.com/find/agilentdirect
Quickly choose and use your test equipment solutions with confidence.

Agilent T&M Software and Connectivity
Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections. Visit **www.agilent.com/find/connectivity** for more information.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax
United States:
(tel) 800 829 4444
(fax) 800 829 4433

Canada:
(tel) 877 894 4414
(fax) 800 746 4866

China:
(tel) 800 810 0189
(fax) 800 820 2816

Europe:
(tel) 31 20 547 2111

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (080) 769 0800
(fax) (080) 769 0900

Latin America:
(tel) (305) 269 7500

Taiwan:
(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:
(tel) (65) 6375 8100
(fax) (65) 67556 0042
Email: tm_ap@agilent.com
Contacts revised: 05/05/05

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2006
Printed in USA, April 7, 2006

5989-0372EN

Windows® is a U.S. registered trademark of Microsoft Corporation.

Agilent Technologies

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP