



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation


**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

## Quick Fact Sheet

# Agilent E3631A – E3634A Programmable DC Power Supplies

## Reliable power, repeatable results

The Agilent E3630A Series gives you get easy access to essential, everyday power sourcing capabilities that will advance your test today and tomorrow — reliably.




### E3631A 80 W triple output power supply



1. Two 4-digit voltage and current readings accurately display actual or limit values simultaneously
2. Autotracking for 25 V outputs synchronization provides required symmetrical voltages for easier and faster setup
3. Output ON/OFF key allows you to enable or disable power outputs, providing extra protection to the device-under-test
4. Easy-to-use settings knob allows quick and easy voltage or current settings
5. Resolution key provides fine setting on voltage or current resolutions for better accuracy
6. Three independent outputs
  - (0 to +6 V / 5 A and 0 to  $\pm$  25 V / 1 A) minimize any interference between circuit-under-tests
  - Bias supply of  $\pm$  25 V allows you to set appropriate operating points

### E3632A – E3634A 120 W to 200 W single output power supplies

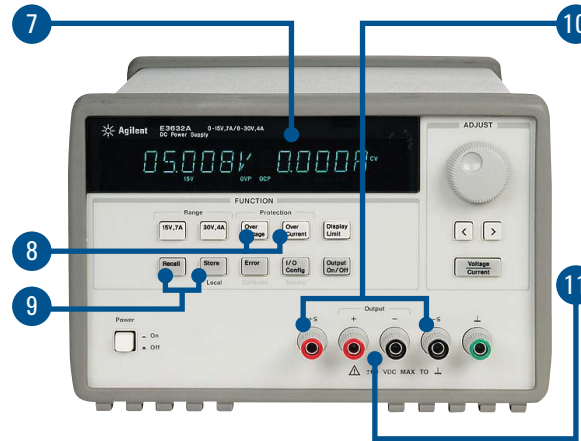

7. Front-panel VFD (vacuum-fluorescent display) shows and monitors actual or limit values simultaneously
8. Delicate device-under-tests are provided with overvoltage and overcurrent protection
9. Three completed power supply setup states can be stored and recalled from internal non-volatile memory, reducing your setup time
10. Remote sensing function eliminates errors in voltage regulation due to voltage drop at load leads
11. Single output power supplies give you the flexibility to select from dual output ranges
  - E3632A (0 to 15 V / 7 A or 0 to 30 V / 4 A)
  - E3633A (0 to 8 V / 20 A or 0 to 20 V / 10 A)
  - E3634A (0 to 25 V / 7 A or 0 to 50 V / 4 A)

**Anticipate — Accelerate — Achieve**



**Agilent Technologies**

## Quick Fact Sheet

### Agilent E3631A – E3634A Programmable DC Power Supplies

#### E3631A specifications

Model	E3631A		
DC outputs			
Voltage	0 to +25 V	0 to +25 V	0 to +6 V
Current	0 to 1 A	0 to 1 A	0 to 5 A
Ripple and noise from 20 Hz to 20 MHz			
Normal-mode voltage	< 350 $\mu$ Vrms / 2 mVpp	< 350 $\mu$ Vrms / 2 mVpp	< 350 $\mu$ Vrms / 2 mVpp
Normal-mode current	< 500 $\mu$ Arms	< 500 $\mu$ Arms	< 500 $\mu$ Arms
Common-mode current	< 1.5 $\mu$ Arms	< 1.5 $\mu$ Arms	< 1.5 $\mu$ Arms
Programming accuracy at 25 °C $\pm$ 5 °C			
Voltage	0.05 % + 20 mV	0.05 % + 20 mV	0.1 % + 5 mV
Current	0.15 % + 4 mA	0.15 % + 4 mA	0.2 % + 10 mA
Readback accuracy at 25 °C $\pm$ 5 °C			
Voltage	0.05 % + 20 mV	0.05 % + 20 mV	0.1 % + 5 mV
Current	0.15 % + 4 mA	0.15 % + 4 mA	
Resolution			
Program / readback	1.5 mV / 0.1 mA	1.5 mV / 0.1 mA	0.5 mV / 0.5 mA
Meter	10 mV / 1mA	10 mV / 1mA	1 mV / 1mA

#### E3632A, E3633A and E3634A specifications

Model	E3632A	E3633A	E3634A
DC outputs			
Voltage	0 to 15 V / 0 to 30 V	0 to 8 V / 0 to 20 V	0 to 25 V / 0 to 50 V
Current	0 to 7 A / 0 to 4 A	0 to 20 A / 0 to 10 A	0 to 7 A / 0 to 4 A
Ripple and noise from 20 Hz to 20 MHz			
Normal-mode voltage	< 350 $\mu$ Vrms / 2 mVpp	< 350 $\mu$ Vrms / 2 mVpp	< 500 $\mu$ Vrms / 3 mVpp
Normal-mode current	< 2 mArms	< 2 mArms	< 2 mArms
Common-mode current	< 1.5 $\mu$ Arms	< 1.5 $\mu$ Arms	< 1.5 $\mu$ Arms
Programming accuracy at 25 °C $\pm$ 5 °C			
Voltage	0.05 % + 10 mV	0.05 % + 10 mV	0.05 % + 10 mV
Current	0.2 % + 10 mA	0.2 % + 10 mA	0.2 % + 10 mA
Readback accuracy at 25 °C $\pm$ 5 °C			
Voltage	0.05 % + 5 mV	0.05 % + 5 mV	0.05 % + 5 mV
Current	0.15 % + 5 mA	0.15 % + 5 mA	0.15 % + 5 mA
Resolution			
Program	1 mV / 0.5 mA	1 mV / 1 mA	3 mV / 0.5 mA
Readback	0.5 mV / 0.1mA	0.5 mV / 1mA	1.5 mV / 0.5 mA

### Measurement Automation Quick and Easy

Whatever instrument you're programming - a power supply, power meter or data acquisition device, whether distributed or local - Agilent VEE graphical language software and GPIB, USB and instrument control products provide you the ease and flexibility to set up and automate the way you want for your application need. Make measurements quickly, easily, affordably - today.

[www.agilent.com/find/IO](http://www.agilent.com/find/IO)  
[www.agilent.com/find/VEE](http://www.agilent.com/find/VEE)

#### Recommended service options

Additional two years of Return-to-Agilent warranty  
 Additional two years of Return-to-Agilent calibrations  
 For more information go to [www.agilent.com/find/removealldoubt](http://www.agilent.com/find/removealldoubt)





## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)