



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

3052A Automatic data acquisition system

The 3052A Automatic Data Acquisition System has been designed to solve your data acquisition, control and automatic testing problems.

The 3052A consists of:

- 3455A DVM
- 3437A System Voltmeter
- 3495A Scanner
- 9825A, 9835A/B, or 9845A System Controller & ROMs

These 3052A features give you a wide range of problem solutions:

- Signal digitizing (>5000 readings/second)
- High speed scanning (≤ 1000 channels/second)
- System timing
- Vectored interrupt system for simultaneous control and processing of multiple tasks
- High speed data access and storage
- Alphanumeric CRT display for easy operator interaction

Typical applications are:

- Process control development
- Signal analysis
- Thermocouple measurements

For further information on this system, refer to page 74–75 or contact your local HP field engineer.

HP Technology

HP has developed an instrument oriented microprocessor to provide the high performance of the 3455A. The microprocessor has a parallel architecture to give the high speed necessary to control the measurement processes of a bench/systems voltmeter. Two microprocessors are used: one for control of the measurement and the second for interface to the HP-IB and computation of the math functions.

Auto cal is a process by which the 3455A internally checks its DC and ohms operating circuits against internal references and corrects for errors. The benefits of auto cal are high accuracy and simplified calibration. Only four adjustments for calibration of DC and ohms are required and these are in the removable reference assembly. The microprocessor is also used to control the auto cal process and compute the correction factors.

The HP-developed fineline tantalum nitride resistor technology used in several HP digital voltmeters is also used in the 3455A. This technology provides accurate temperature tracking resistors that result in excellent long term DC accuracy.

Specifications

DC Voltage

Ranges		Maximum Display	
High Resolution Off	High Resolution On	High Resolution Off	High Resolution On
0.1	---	± 0.149999 V	---
1	1	± 1.499999 V	± 1.499999 V
10	10	± 14.99999 V	± 14.99999 V
100	100	± 149.9999 V	± 149.9999 V
1000	1000	± 1000.00 V	± 1000.000 V

Performance

(High Resolution Off)

Accuracy

24 Hours: 23°C $\pm 1^\circ$ C

- 10 V range:** $\pm (0.002\%$ of reading + 1 digit).
- 1 V range:** $\pm (0.003\%$ of reading + 1 digit).
- 0.1 V range:** $\pm (0.004\%$ of reading + 4 digits).
- 100 & 1000 V range:** $\pm (0.004\%$ of reading + 1 digit).

90 days 23°C $\pm 5^\circ$ C

- 10 V range:** $\pm (0.005\%$ of reading + 1 digit).
- 1 V range:** $\pm (0.006\%$ of reading + 1 digit).
- 0.1 V range:** $\pm (0.007\%$ of reading + 4 digits).
- 100 & 1000 V range:** $\pm (0.007\%$ of reading + 1 digit).

6 months 23°C $\pm 5^\circ$ C

- 10 V range:** $\pm (0.008\%$ of reading + 1 digit).
- 1 V range:** $\pm (0.009\%$ of reading + 1 digit).
- 0.1 V range:** $\pm (0.010\%$ of reading + 5 digits).
- 100 & 1000 V range:** $\pm (0.010\%$ of reading + 1 digit).

1 year 23°C $\pm 5^\circ$ C

- 10 V range:** $\pm (0.013\%$ of reading + 1 digit).
- 1 V range:** $\pm (0.014\%$ of reading + 1 digit).
- 0.1 V range:** $\pm (0.015\%$ of reading + 6 digits).
- 100 & 1000 V range:** $\pm (0.015\%$ of reading + 1 digit).

(High Resolution On)

Accuracy

24 hours 23°C $\pm 1^\circ$ C

- 10 V range:** $\pm (0.002\%$ of reading + 3 digits).
- 100 & 1000 V range:** $\pm (0.004\%$ of reading + 3 digits).
- 1 V range:** $\pm (0.003\%$ of reading + 4 digits).

90 days 23°C $\pm 5^\circ$ C

- 10 V range:** $\pm (0.005\%$ of reading + 3 digits).
- 100 & 1000 V range:** $\pm (0.007\%$ of reading + 3 digits).
- 1 V range:** $\pm (0.006\%$ of reading + 4 digits).

6 months 23°C $\pm 5^\circ$ C

- 10 V range:** $\pm (0.008\%$ of reading + 3 digits).
- 100 & 1000 V range:** $\pm (0.010\%$ of reading + 3 digits).
- 1 V range:** $\pm (0.009\%$ of reading + 5 digits).

1 year 23°C $\pm 5^\circ$ C

- 10 V range:** $\pm (0.013\%$ of reading + 3 digits).
- 100 & 1000 V range:** $\pm (0.015\%$ of reading + 3 digits).
- 1 V range:** $\pm (0.014\%$ of reading + 6 digits).

Input characteristics

Input resistance: 0.1 V through 10 V range: $> 10^{10}$ ohms. 100 V and 1000 V range: 10 megohm $\pm 0.1\%$ with Auto Cal. "off".

Maximum input voltage

High to low input terminals: ± 1000 V peak.

Guard to chassis: ± 500 V peak.

Guard to low terminal: ± 200 V peak.

Normal mode rejection (NMR): NMR is the ratio of the peak normal-mode voltage to the peak error voltage in the reading.

NMR at 50 or 60 Hz $\pm 0.1\%$: > 60 dB.

Effective common mode rejection (ECMR): ECMR is the ratio of the peak common-mode voltage to the resultant peak error voltage in the reading.

ECMR with 1 k Ω unbalance in low lead at

DC: > 140 dB.

50 Hz or 60 Hz $\pm 0.1\%$: > 160 db.

Maximum reading rate

	60 Hz Gate Length	
	High Resolution Off	High Resolution On
Local	5 rdg/s	3 rdg/s
Remote	24 rdg/s	6 rdg/s

	50 Hz Gate Length	
	High Resolution Off	High Resolution On
Local	3.5 rdg/s	2.5 rdg/s
Remote	22 rdg/s	5 rdg/s

DIGITAL VOLTMETERS

5½/6½-digit DVM with Auto Cal

Model 3455A (cont.)

AC Voltage (rms converter)

(High Resolution On or Off)

Ranges:	1.00000 V	Maximum Display:	1.49999 V
	10.0000 V		14.9999 V
	100.000 V		149.999 V
	1000.00 V		1000.00 V

Range selection: Manual, Automatic or Remote.

Function selection: ACV or Fact ACV.

Input characteristics

Input impedance

Front terminals: 2 MΩ ± 1% shunted by less than 100 pf.

Rear terminals: 2 MΩ ± 1% shunted by less than 75 pf.

Maximum input voltage

High to low terminals: ± 1414 volts peak.

Subject to a 10⁷ volts—Hz limitation.

Guard to chassis: ± 500 V peak.

Guard to low terminal: ± 200 V peak.

Maximum reading rate

	60 Hz Gate Length		50 Hz Gate Length	
	ACV	FAST ACV	ACV	FAST ACV
Local	1.3 rdg/s	4.5 rdg/s	1.1 rdg/s	3.5 rdg/s
Remote	1.3 rdg/s	13 rdg/s	1.1 rdg/s	12 rdg/s

Response time

ACV and FAST ACV

First reading to <0.1% of step size when triggered coincident with step change when on correct range (for AC signals with no DC component).

AC voltage (average converter) Opt 001

(High Resolution On or Off)

Ranges:	1 V	Maximum Display:	1.49999 V
	10 V		14.9999 V
	100 V		149.999 V
	1000 V		1000.00 V

Range selection: Manual, Automatic or Remote.

Function selection: ACV or Fast ACV.

Performance (rms converter)

Accuracy ± (% of reading + digits)

Guard must be connected to low. On the 1000 V range add 0.01 ppm/volt—kHz. For inputs above 500 V multiply the accuracy by $\frac{500 + V}{1000}$

	AC coupling:					
	FAST ACV ACV	300 Hz–20 kHz 30 Hz–20 kHz	20 kHz–100 kHz*	100 kHz–250 kHz**	250 kHz–500 kHz**	500 kHz–1 MHz**
24 hrs: 23°C ± 1°C		0.04% + 40 digits	0.4% + 80 digits	1.8% + 200 digits	4% + 400 digits	5% + 2600 digits
90 days: 23°C ± 5°C		0.05% + 50 digits	0.5% + 100 digits	2.0% + 250 digits	5% + 500 digits	6% + 3100 digits
6 mos: 23°C ± 5°C		0.06% + 60 digits	0.6% + 130 digits	2.1% + 300 digits	5.1% + 600 digits	6.3% + 3500 digits
1 year: 23°C ± 5°C		0.07% + 70 digits	0.7% + 160 digits	2.2% + 350 digits	5.3% + 700 digits	6.6% + 3900 digits

AC < 1% of range and AC/DC: add 20 digits.

*AC/DC coupled or AC coupled with frequency > 50 kHz and with input < 5% of full scale: Add 150 digits.

**Frequencies greater than 100 kHz specified on 1 and 10 V ranges only. Subject to a 10⁷ volts—Hz limitation.

Crest Factor: 7:1 at Full Scale

Performance (average converter)

Accuracy ± (% of reading + digits)

Guard must be connected to Low. On the 1000 V range, add 0.01 ppm/volt—kHz. Specifications are for input levels above 1/100th of range.

	FAST ACV ACV	300 Hz–500 Hz 30 Hz–50 Hz	500 Hz–1 kHz 50 Hz–100 Hz	1 kHz–100 kHz 100 Hz–100 kHz	100 kHz–250 kHz* 100 kHz–250 kHz*
	24 hrs: 23°C ± 1°C		0.47% + 70 digits	0.32% + 50 digits	0.09% + 25 digits
90 days: 23°C ± 5°C		0.50% + 70 digits	0.35% + 50 digits	0.1% + 25 digits	0.75% + 60 digits
6 mos: 23°C ± 5°C		0.50% + 70 digits	0.40% + 60 digits	0.1% + 30 digits	0.75% + 70 digits
1 yr.: 23°C ± 5°C		0.50% + 70 digits	0.40% + 70 digits	0.12% + 35 digits	0.75% + 80 digits

*Frequencies greater than 100 kHz specified on 1 and 10 V ranges only. Subject to a 10⁷ volts—Hz limitation.

Input characteristics

Input impedance:

Front Terminals—2 MΩ ± 1% shunted by less than 100 pf.

Rear Terminals—2 MΩ ± 1% shunted by less than 75 pf.

Maximum input voltage

High to low terminals: ± 1414 volts peak.

Subject to a 10⁷ volts—Hz limitation.

Guard to chassis: ± 500 V peak.

Guard to low terminal: ± 200 V peak.

Maximum reading rate

	60 Hz Gate Length		50 Hz Gate Length	
	ACV	FAST ACV	ACV	FAST ACV
Local	1.3 rdg/s	4.5 rdg/s	1.1 rdg/s	3.5 rdg/s
Remote	1.3 rdg/s	13 rdg/s	1.1 rdg/s	12 rdg/s

Ohms

Ranges		Maximum Display	
High Resolution Off	High Resolution On	High Resolution Off	High Resolution On
0.100000 kΩ	—	0.149999 kΩ	—
1.00000 kΩ	1.000000 kΩ	1.49999 kΩ	1.499999 kΩ
10.0000 kΩ	10.00000 kΩ	14.9999 kΩ	14.99999 kΩ
100.000 kΩ	100.0000 kΩ	149.999 kΩ	149.9999 kΩ
1000.00 kΩ	1000.000 kΩ	1499.99 kΩ	1499.999 kΩ
10000.0 kΩ	10000.00 kΩ	14999.9 kΩ	14999.99 kΩ

Range selection: Manual, Automatic, or Remote.

Function selection: 2-wire kΩ or 4-wire kΩ.

Performance

(High Resolution Off)

Accuracy: 4-wire kΩ (1 digit = .001% of range)

24 hours: 23°C ± 1°C.

0.1 kΩ range: ± (0.003% of reading + 4 digits).

1 kΩ range: ± (0.003% of reading + 1 digit).

10 kΩ range: ± (0.005% of reading + 2 digits).

100 kΩ range: ± (0.002% of reading + 2 digits).

1000 kΩ range: ± (0.012% of reading + 5 digits).

10 000 kΩ range: ± (0.1% of reading + 5 digits).

90 days: 23°C ± 5°C

0.1 kΩ range: ± (0.005% of reading + 5 digits).

1 kΩ range: ± (0.005% of reading + 1 digit).

10 kΩ range: ± (0.007% of reading + 2 digits).

100 kΩ range: ± (0.004% of reading + 2 digits).

1000 kΩ range: ± (0.014% of reading + 5 digits).

10 000 kΩ range: ± (0.100% of reading + 5 digits).

6 months: 23°C ± 5°C.

- 0.1 kΩ range:** ± (0.005% of reading + 6 digits).
- 1 kΩ range:** ± (0.005% of reading + 1 digit).
- 10 kΩ range:** ± (0.007% of reading + 2 digits).
- 100 kΩ range:** ± (0.004% of reading + 3 digits).
- 1000 kΩ range:** ± (0.014% of reading + 5 digits).
- 10,000 kΩ range:** ± (0.100% of reading + 5 digits).

1 year: 23°C ± 5°C

- 0.1 kΩ range:** ± (0.006% of reading + 7 digits).
- 1 kΩ range:** ± (0.006% of reading + 2 digits).
- 10 kΩ range:** ± (0.008% of reading + 3 digits).
- 100 kΩ range:** ± (0.005% of reading + 4 digits).
- 1000 kΩ range:** ± (0.015% of reading + 6 digits).
- 10,000 kΩ range:** ± (0.100% of reading + 6 digits).

4-wire kΩ (1 digit = .0001% of range)

High Resolution On

24 hours: 23°C ± 1°C

- 1 kΩ range:** ± (0.0025% of reading + 4 digits).
- 10 kΩ range:** ± (0.0045% of reading + 4 digits).
- 100 kΩ range:** ± (0.0020% of reading + 5 digits).
- 1000 kΩ range:** ± (0.0120% of reading + 4 digits).
- 10,000 kΩ range:** ± (0.1000% of reading + 4 digits).

90 days: 23°C ± 5°C

- 1 kΩ range:** ± (0.0035% of reading + 5 digits).
- 10 kΩ range:** ± (0.0060% of reading + 5 digits).
- 100 kΩ range:** ± (0.0035% of reading + 6 digits).
- 1000 kΩ range:** ± (0.0135% of reading + 5 digits).
- 10,000 kΩ range:** ± (0.1000% of reading + 5 digits).

6 months: 23°C ± 5°C

- 1 kΩ range:** ± (0.0040% of reading + 6 digits).
- 10 kΩ range:** ± (0.0065% of reading + 6 digits).
- 100 kΩ range:** ± (0.0040% of reading + 7 digits).
- 1000 kΩ range:** ± (0.0140% of reading + 6 digits).
- 10,000 kΩ range:** ± (0.1000% of reading + 6 digits).

1 year: 23°C ± 5°C

- 1 kΩ range:** ± (0.0045% of reading + 7 digits).
- 10 kΩ range:** ± (0.0070% of reading + 7 digits).
- 100 kΩ range:** ± (0.0045% of reading + 8 digits).
- 1000 kΩ range:** ± (0.0145% of reading + 7 digits).
- 10,000 kΩ range:** ± (0.1000% of reading + 7 digits).

2-wire kΩ: all accuracy specifications are the same as 4-wire kΩ except add 0.0004 kΩ to all readings.

Input characteristics

Maximum voltage generated across unknown: < 5 volts for open circuit; < 4.7 volts for valid reading.


Signal source driving unknown (nominal): 0.1 kΩ, 1 kΩ & 10 kΩ ranges.

Overload protection


Non-destruction: ± 350 V peak.

Equivalent ohmmeter circuits:


0.1 kΩ, 1 kΩ & 10 kΩ RANGES

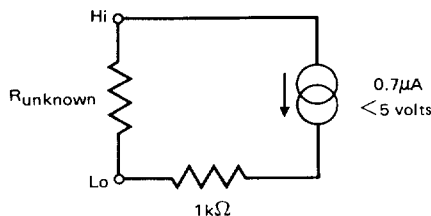

100 kΩ

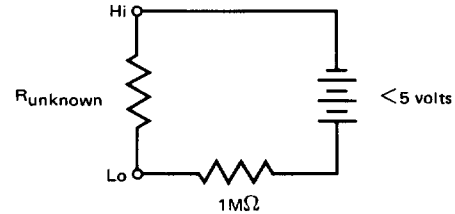

1 MΩ & 10 MΩ RANGES

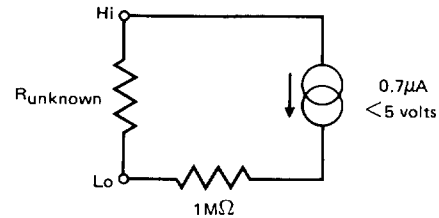

Maximum reading rate

	60 Hz Gate Length		50 HZ Gate Length	
	High Resolution Off	High Resolution On	High Resolution Off	High Resolution On
Local	4.5 rdg/s	2 rdg/s	4 rdg/s	1.8 rdg/s
Remote	12rdg/s	3 rdg/s	11 rdg/s	2.5 rdg/s

Math

Scale ($\frac{X-Z}{Y}$): X is present reading. Y and Z are previously entered readings, or numbers entered from the front panel or by external program.

Maximum number (entered or displayed): ± 199,999.9.

Accuracy: ± (Accuracy of X reading ± 1 digit of displayed answer). This assumes no “Y” or “Z” error.

%Error ($\frac{X-Y}{Y} \times 100\%$): X is present reading, Y is a previously entered reading, or number entered from the front panel or by external program.

Maximum number (entered or displayed): ± 199,999.9.

Accuracy: ± (Accuracy of X reading ± 1 digit of displayed answer). This assumes no “Y” error.

How to enter numbers in “Y” or “Z”

From a current displayed reading: press STORE “Y” or “Z”.

From front panel: Press ENTER “Y” or “Z”. The front panel is now set for numerical entry. These numbers are in blue next to the keys. Enter number and press STORE “Y” or “Z”.

By remote program: send program codes for equivalent front panel operations.

General

Power: 100 V, 120 V, 240 V +5% – 10%, 48 Hz to 400 Hz line operation; < 60 VA with all options.

Size: 88.9 H x 425.5 W x 527.1 mm D (3½” x 16¾” x 20¾”).

Weight: net, 9.38 kg (20 lb 11 oz). Shipping, 11.79 kg (26 lb).

Options

001: Average converter

3455A Digital Voltmeter

Price
less \$200
\$3400



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com