

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.


Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

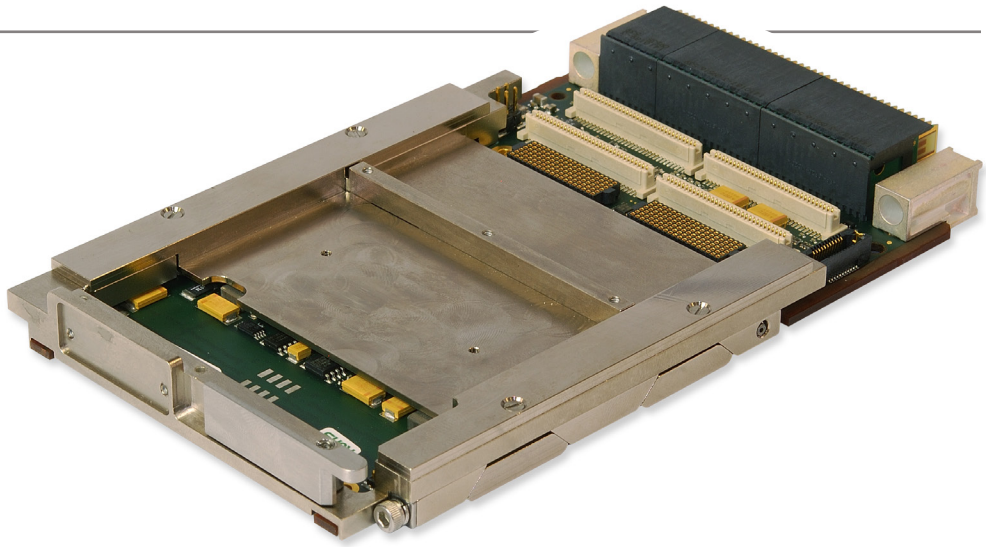

SBC314

3U VPX QorIQ AMP T1042 / T2081-based Single Board Computer

The SBC314 is the first QorIQ™ AMP (advanced multiprocessing series) based product to join Abaco's VPXtreme3 family of rugged 3U VPX single board computers.

The SBC314 offers a high performance option based on the T2081 processor and a low power option based on the T1042 processor, allowing the user to select a solution tailored to their application.

- The T2081 brings the benefits of AltiVec co-processing to a 4-core platform, each of which is dual threaded, offering 8 virtual cores, consuming up to 25W.
- The T1042 is optimized for lower power consumption applications, offering 4 single threaded cores consuming less than 7.5W.

Combined with an extensive and flexible range of I/O options, the SBC314 is ideal for a wide range of high performance commercial, industrial, defense and aerospace applications.

Fully compatible with OpenVPX (VITA 65), the SBC314 offers multiple connectivity options via its highly configurable PCI Express™ fabric ports enabling a range of scalable solutions from single host and peripherals to larger multiprocessor systems.

In addition the SBC314 supports a diverse I/O set that includes Gigabit Ethernet, COM ports, USB 2.0, SATA and GPIO.

Further incremental system resource expansion is provided via an XMC/PMC-capable mezzanine site which offers the option of having either XMC I/O or PMC I/O routed to the VPX backplane connectors.

Designed specifically for harsh environments, the SBC314 is ideal for embedded and mil/aero applications where high reliability and survivability are a must. Available in five air- and conduction-cooled ruggedization levels, the SBC314 also offers VITA 48 formats for 2-level maintenance (2LM) requirements.

The SBC314 is fully supported by comprehensive Deployed Test Software (BIT and BCS) with operating system support for VxWorks® 6.x, 7, VxWorks653®; LynxOS-178, DEOS and Open Source Linux®.

In addition, the SBC314 is also supported by Abaco Systems innovative P2P software, which supports the implementation of PCI Express peer-to-peer connectivity.

FEATURES:

- 3U OpenVPX single board computer
- Power Architecture™ AMP (advanced multiprocessing) CPUs
  - T1042 (four e5500 cores)
  - T2081 (eight e6500 virtual cores)
- 4 GB DDR3L SDRAM
- Up to 256 MB NOR Flash
- Up to 16 GB SLC NAND Flash
- 512 kB Autostore NVRAM
- PCIe Gen2 data plane ports from VPX P1 (options for 2 x4, 1 x4 + 4 x1, 8 x1)
- 1x PMC/XMC site
- Up to 3x Gigabit Ethernet ports
- 2x RS-232/422 COM ports (or 4x RS-232)
- Up to 2x SATA ports
- 2x USB 2.0
- Up to 8x single-ended GPIO (5V tolerant)
- BMM (Board Management Microcontroller)
- VITA65 OpenVPX Compatible
  - MOD3-PAY-2F2T-16.2.5-3
  - MOD3-PAY-2F2U -16.2.3-3

abaco SYSTEMS

SBC314 *3U VPX QorIQ AMP T1042 / T2081-based Single Board Computer*

Specifications

Processor Node
- Support for T2081 or T1042 QorIQ AMP CPUs
- T2081 up to 1.8 GHz
  - Eight e6500 virtual cores (4 cores, dual threaded and with AltiVec co-processing)
  - Double-precision floating-point support
  - 2 MB banked L2 cache, 512MB platform cache

DDR3L SDRAM
- 4 GB DDR3L SDRAM with ECC (Single Bank)

Flash Memory
- Up to 256 MB NOR Flash memory
- Protected BANC Boot Area
- Up to 16 GB NAND Flash memory

Fabric
- Two x4 PCIe Gen2 links from VPX P1 (one can be configured as a non-transparent port)
- Each link can be optionally configured as four x1 PCIe

Gigabit Ethernet
- 2x 1000BASE-T or 1x 1000BASE-T + 2x 1000BASE-X as standard (P1 rear IO)
- Additional 1000BASE-T port available (P1 rear I/O) as an option instead of 1x SATA port and 4 GPIO ports

Serial I/O
- 2x RS-232/422 UART ports (P1/P2 rear I/O)

USB
- 2x USB 2.0 (P1 rear I/O)

SATA
- 2x SATA (300 MB/s) (P1 rear I/O). Lose one port if additional Ethernet port is required (as above). Lose one port if on-board NAND selected

General Purpose I/O
- Up to 8 GPIO (P1 rear I/O), 5V tolerant GPIO each capable of generating an interrupt


PMC / XMC Extension Slot
- x4 PCIe XMC site (P2 rear I/O)
- PCI-X PMC site (P2 rear I/O)
- Available with VITA 42 connectors (contact factory for VITA 61 connectors)

NVRAM / Real-Time Clock / Watchdog / ETI
- 512 kB Autostore NVRAM
- Real-time clock with 1 second resolution
- 2x Avionics-style Watchdog timers (programmable 32-bit timer)
- Elapsed Time Indicator (record power cycles and on-time)

Temperature Sensor
- Onboard ambient temperature

Power Requirements
- +5V required
- +/-12V only if required by mounted PMC module

Block diagram

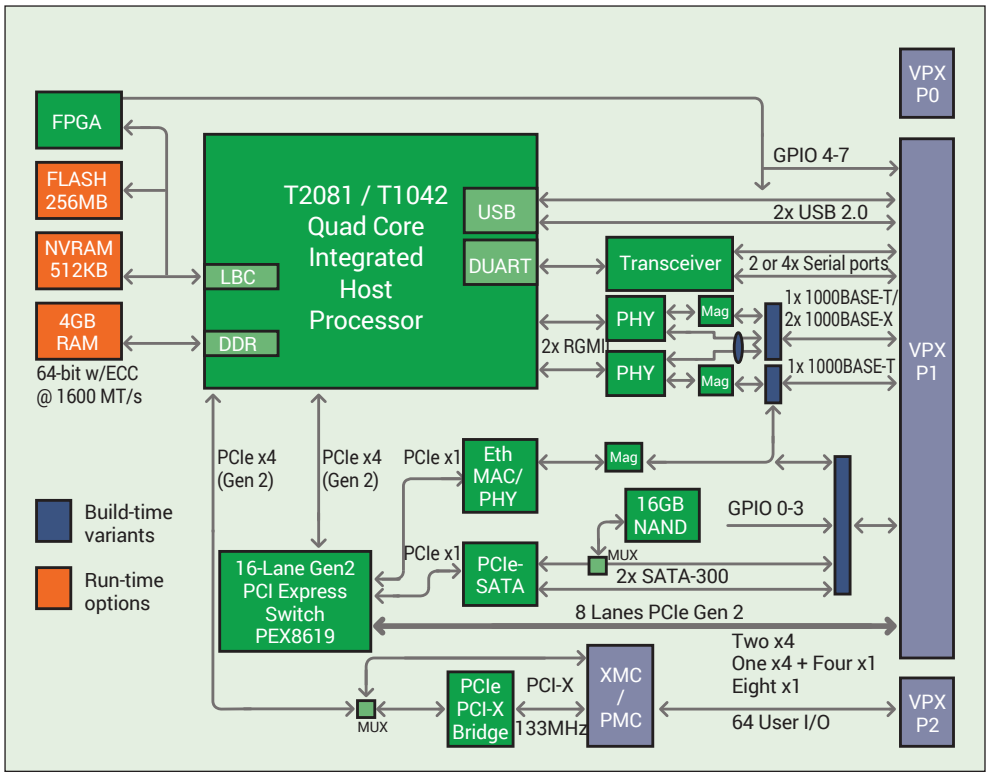

Environmental

	Level 1	Level 2	Level 3	Level 4	Level 5
Cooling Method	Convection	Convection	Convection	Conduction	Conduction
Conformal Coating	Optional	Standard	Standard	Standard	Standard
High/Low Temp	0 to +55°C	-20 to +65°C	-40 to +75°C	-40 to +75°C	-40 to +85°C
Operational	(300 ft/m)	(300 ft/m)	(600 ft/m)	At cold wall	At cold wall
Random Vibration	0.002g2/Hz*	0.002g2/Hz*	0.04g2/Hz**	0.1g2/Hz**	0.1g2/Hz**
Shock	20g***	20g***	20g***	40g***	40g***

* With a flat response to 1000 Hz, 6 dB/Oct roll-off from 1000 to 2000 Hz ** From 10 to 1000 Hz *** Peak sawtooth 11 ms duration

WE INNOVATE. WE DELIVER. YOU SUCCEED.

Americas: 866-OK-ABACO or +1-866-652-2226 **Asia & Oceania:** +81-3-5544-3973
Europe, Africa, & Middle East: +44 (0) 1327-359444
Locate an Abaco Systems Sales Representative visit: abaco.com/products/sales
abaco.com | @AbacoSys

©2018 Abaco Systems. All Rights Reserved. All other brands, names or trademarks are property of their respective owners. Specifications are subject to change without notice.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP